

Environmental Product Declaration



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Mortice Sash Lock 1266/84

from

ASSA ABLOY

Programme:	The International EPD® System, www.environdec.com
Programme operator:	EPD International AB
EPD registration number:	EPD-IES-0034111:002
EPD Type:	Product Specific
EPD Grouping:	EPD of multiple products, based on worst-case results of the product group
Version Date:	2026-08-26
Revision Date:	N/A
Validity Date:	2031-08-26

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



General information

Programme information

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

Accountabilities for PCR, LCA and Independent, Third-Party Verification

Product Category Rules (PCR)

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product Category Rules (PCR): PCR 2019:14 Construction products, version 2.0.1

c-PCR to PCR 2019:14 Building hardware (EN 17610:2022) Version: 2022-11-04

PCR review was conducted by: The Technical Committee of the International EPD System. See www.environdec.com for a list of members. Chairs of the PCR review: Rob Rouwette (chair), Noa Meron (co-chair). The review panel may be contacted via support@environdec.com.

Life Cycle Assessment (LCA)

LCA accountability: Christine Alfaro - Sustainable Solutions Corporation

Main Database: Sphera

LCA Software: LCA for Experts (Previously known as GaBi) v10.6

LCA/EPD Tool: ASSA ABLOY EMEIA Builders Hardware EPD Generator, version 3.0

Third-Party Verification

External and independent ('third-party') verification of the declaration and data, according to ISO 14025:2006, via EPD verification through:

☒ Individual EPD verification with a pre-verified LCA/EPD tool

Third-party verifier: Jane Anderson, Ph.D., ConstructionLCA



Approved by: The International EPD® System

Pre-verified EPD tool: ASSA ABLOY EMEIA Builders Hardware EPD Generator, version 3.0

Procedure for follow-up of data during EPD validity involves third party verifier:

☐ Yes ☒ No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Company Information

<u>Owner of the EPD:</u>	ASSA ABLOY Openingsolution Meerval 5, 4941SSK Raamsdonksveer Nederland
<u>Contact:</u>	Olympia Dolla olympia.dolla@assaabloy.com
<u>Description of the organisation:</u>	ASSA ABLOY remains committed to the principles of the UN Global Compact in the areas of human rights, labor, the environment, and anti-corruption.
<u>Product-related or management system-related certifications:</u>	ASSA ABLOY works hard to minimize the environmental impacts of its business activities through various corporate-wide sustainability initiatives. To learn more, please visit: https://www.assaabloy.com/sv/com/sustainability/sustainability-report/
<u>Name and location of production site:</u>	Guli, China

Product Information

<u>Product name:</u>	Mortice Sash Lock 1266/84
<u>Product identification:</u>	Standard mortice door lock for use in inner doors in residential buildings
<u>Product description:</u>	Product Name: Sash Lock 1266/84 Product Characteristic: Mortice Sash Lock. The 1266/84 is a Standard Mortice Sash Lock for residential buildings. Additional features include: - Steel Galvanized Lock Case - Steel Laquered Front Plate - Brass Latch and Dead Bolt Products covered under EPD: See Appendix
<u>UN CPC code:</u>	42992
<u>Geographical scope:</u>	UK European data is used as a proxy throughout the model where applicable.

LCA Information

Functional unit / declared unit:

The declaration refers to the declared unit of 1 kilogram of mortise lock, as specified in the Builders Hardware PCR. For any product group EPDs, an impact assessment was completed for each product and the highest impacts were reported as conservative representations of the product group. Product grouping was considered appropriate if the individual product impacts differed by no more than $\pm 10\%$ in any impact category.

Name	Value	Unit
Declared Unit	1.00E+00	kg
Mass Per Product	4.74E-01	kg
Products Required to Achieve Declared Unit	2.11E+00	-

Reference service life:

The reference service life of the Mortise Sash Lock 1266/84 is estimated to be 30 years. The 30 years is based on the support & service life of the Mortise Sash Lock 1266/84 and neither factual nor estimated life time.

Time representativeness:

The period under review is the full calendar year of 2022.

Database(s) and LCA software used:

LCA for Experts developed by Sphera was the LCA software used for the study. Primary data were collected for every process in the product system under the control of ASSA ABLOY Corporate. Secondary data from the LCA for Experts Sphera database were utilized. These data were evaluated and have temporal, geographic, and technical coverage appropriate to the scope of the Builder's Hardware product category.

Data Quality - GWP Contributors:

This EPD declares data quality information for all processes that contribute to $>10\%$ of the GWP-GHG results for modules A1-A3.

Process	Source Type	Source	Reference Year	Data Category	Share of GWP-GHG Results for A1-A3
Steel hot rolled coil (EN15804 A1-A3)	Database	Sphera	2024-2027	Secondary	44%


Data Quality - Poor and Fair Quality Data:

Due to the complexity of the global upstream supply chain and the current lack of supplier-specific primary data, secondary background datasets were utilized. No datasets used in this EPD are classified as:

- 'Very Poor',
- 'Poor', OR
- 'Fair' that contribute more than 30% to any core environmental impact indicator are reported below.

Description of system boundaries:

Cradle to grave and module D (A + B + C + D)

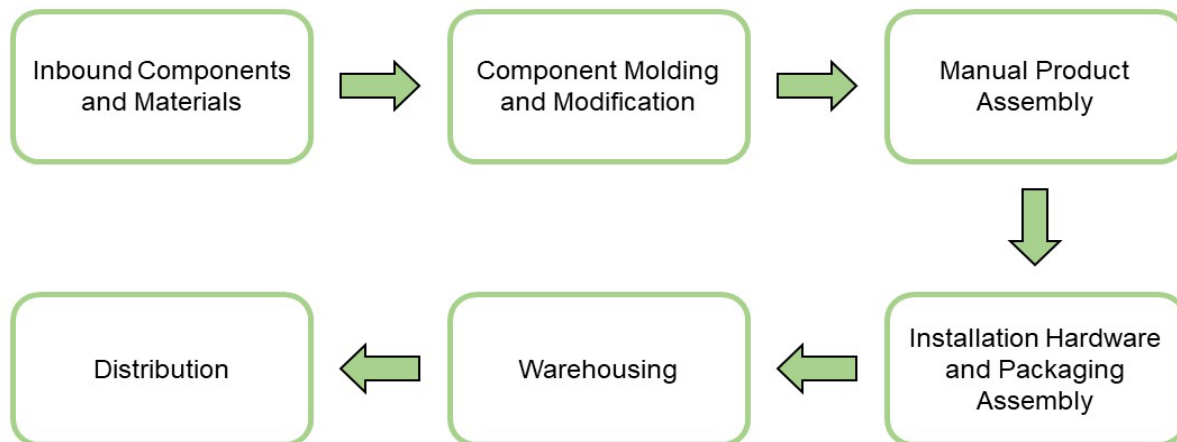

Cut-off Criteria:

Processes whose total contribution to the final result, with respect to their mass and in relation to all considered impact categories, is less than 1% can be neglected. The sum of the neglected processes may not exceed 5% by mass and by 5% of the considered impact categories for each module. For that a documented assumption is admissible. The below activities were cut off as they met the above criteria.

- Human Activity
- Capital Equipment

	Product Stage			Construction Process Stage		Use Stage							End-of-Life Stage [†]				Benefits and Loads Beyond the System Boundaries
	Raw material supply	Transport	Manufacturing	Transport from gate to the site	Construction/ installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction /demolition	Transport	Waste processing	Disposal	Reuse-Recovery- Recycling potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	X	X*	X*	X*	X*	X	X*	X*	X	X	X	X
Geography	Asia	Asia	Asia	Global	Europe	EMEIA	EMEIA	EMEIA	EMEIA	EMEIA	EMEIA	EMEIA	EMEIA	EMEIA	EMEIA	EMEIA	EMEIA
Specific data used	19%																
Variation - Products	Not Relevant																
Variation - sites	Not Relevant																

(X = Included; MND = Module Not Declared)

* These phases are zero and may be removed from tables for formatting.

† This includes provision of all materials, products and energy, packaging processing and its transport, as well as waste processing up to the end-of waste state or disposal of final residues.

Content Information

The LCI method principle for the processes used in this study was attributional. Recycled content is based market assumptions specified in the datasets. Pre-consumer scrap for metals does not account for internal regrind, it is shipped to a metals recycler where it is then processed and turned into a co-product. As specified in Sphera, ts, and Eurofer, the allocation for the processes within these datasets was market-based allocation. This was interpreted to mean that cut off allocation was not used and some burden was allocated to the recycled materials based on economic value.

Product Components	Weight, kg	Post-consumer material, weight-%	Pre-consumer material, weight-%	Total secondary material, weight-%	Biogenic material, kg C/kg
Brass	1.37E-01	74.0%	16.0%	90.0%	-
Stainless Steel	0.00E+00	42.0%	20.0%	62.0%	-
Steel	7.60E-01	-	-	-	-
Aluminum	0.00E+00	-	-	-	-
Copper	0.00E+00	-	2.0%	2.0%	-
Glass	0.00E+00	-	25.0%	25.0%	-
Electronics/Mechanics	0.00E+00	-	-	-	-
Plastics	5.98E-04	-	-	-	-
Other	1.02E-01	-	-	-	-
Total	1.00E+00	-	-	-	-
Packaging Materials	Weight, kg	Post-consumer material, weight-%	Pre-consumer material, weight-%	Total secondary material, weight-%	Biogenic material, kg C/kg
Cardboard	1.65E-02	Not Specified	Not Specified	27.3%	5.53E-03
Paper	2.55E-02	-	-	-	8.59E-03
Plastics	1.64E-03	-	-	-	-
Wood	5.51E-02	-	-	-	-
Total	4.36E-02	-	-	-	1.41E-02

The product does not contain substances which exceed the limits for registration with the European Chemicals Agency regarding the "Candidate List of Substances of Very High Concern for Authorisation".

Additional Environmental Information

Transportation

ASSA ABLOY EMEIA products are sold globally. The assumptions used are based off of major product markets and the PCR. End users may need to adapt impacts based on their location.

Transport to Building Site (A4)		
Name	Value	Unit
Liters of fuel	0.16	l/100km per kg
Transport distance (Truck)	3500	km
Capacity utilization (including empty runs)	36	%
Gross density of products transported	-	kg/m ³
Capacity utilization volume factor	1.00	-

Product Installation

Mortice Sash Lock 1266/84 products are distributed through and installed by trained installation technicians, such as locksmiths, carpenters etc. adhering to local/national standards and requirements.

Installation into the building (A5)		
Name	Value	Unit
Auxiliary materials	-	kg
Water consumption	-	m ³
Other resources	-	kg
Electricity consumption	0.00	kWh
Other energy carriers	-	MJ
Waste materials at construction site	0.04	kg
Output substance (recycle)	0.03	kg
Output substance (landfill)	0.01	kg
Output substance (incineration)	0.01	kg
Direct emissions to ambient air*, soil, and water	0.15	kg CO ₂

*CO₂ emissions to air from disposal of packaging

Reference Service Life		
Name	Value	Unit
Reference Service Life	30	years

Product Use

The product is possible to reuse during the reference service life and can be moved from one similar door opening to another. No auxiliary or consumable materials are incurred for maintenance and usage of the product. Repairs or replacement are not usually necessary. No cleaning efforts need to be taken into consideration.

Operational Energy Use (B6)		
Name	Value	Unit
Water consumption (from tap, to sewer)	-	m ³
Electricity consumption	0.0	kWh
Other energy carriers	-	MJ
Equipment output	-	kW
Direct emissions to ambient air, soil, and water	-	kg

Disposal

The product can be mechanically disassembled to separate the different materials. In aiming to recycle 100% of the product, losses to landfill occur. For applicable products, 95% of the metal materials used are recycled, 42.5% of the electronics are recycled, and 30% of the glass is recycled. The remainder of components are disposed by sending to landfill.

Disclaimer: The results of Module A should not be used without considering the results of Module C.

End of life (C1-C4)		
Name	Value	Unit
Collected separately	0.95	kg
Collected as mixed construction waste	0.05	kg
Reuse	0.00	kg
Recycling	0.95	kg
Energy recovery	0.00	kg
Landfilling	0.05	kg

End of life transportation (C2)		
Scenario Information	Value	Unit
Vehicle Type	0.16	l/100km per kg
Distance	80.00	km
Capacity Utilisation (including empty returns)	36.00	%
Bulk Density of Transported Products	-	kg/m ³
Volume Capacity Utilisation Factor	1.00	N/A

End of life electricity source	
RER: Electricity grid mix Sphera	

Benefits and Loads Beyond the System Boundary

The majority, by weight, of door components is metal, which can be recycled. Module D is modelled to reflect the offset of virgin material production in the next product life by calculating the net benefit of the primary material process and the point of substitution recycling process.

Module D Flows		
Input	Value	Unit
Recycling potential aluminium sheet	0.00E+00	kg/kg
Recycling potential copper sheet	0.00E+00	kg/kg
Glass cullet	0.00E+00	kg/kg
EAF Steel billet / slab / bloom	6.37E-01	kg/kg
Zinc scrap elZinc - Asturiana de Laminados (D out A5)	8.71E-02	kg/kg
Plastic granulate secondary (low metal contamination)	3.32E-04	kg/kg
Corrugated Board 2018; 84,5% recycled fiber; cut-off EoL	7.18E-03	kg/kg
Outputs	Value	Unit
Aluminium ingot mix	0.00E+00	kg/kg
Brass component (EN15804 A1-A3)	-1.17E-02	kg/kg
Copper sheet mix (Europe 2015)	0.00E+00	kg/kg
Float flat glass (open sec. material)	0.00E+00	kg/kg
Ferro nickel (29%)	0.00E+00	kg/kg
BF Steel billet / slab / bloom	-6.37E-01	kg/kg
Zinc redistilled mix	-8.71E-02	kg/kg
Electronics scrap [Waste for recovery]	0.00E+00	kg/kg
High impact polystyrene (HIPS)	0.00E+00	kg/kg
Polyethylene low density granulate (LDPE/PE-LD)	-3.32E-04	kg/kg
Corrugated board excl. paper production 2015, open paper input, average composition	-7.18E-03	kg/kg

Results of the Environmental Performance Indicators

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Results shown below were calculated using EN 15804+A2 (EF 3.1) Methodology.

EN 15804+A2 (Environmental Footprint 3.1) Impact Assessment											
Parameter	Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D
GWP-total	Climate change - total	kg CO ₂ -Eq.	4.65E+00	3.29E-01	1.56E-01	0.00E+00	0.00E+00	7.22E-03	1.68E-02	5.83E-03	-1.04E+00
GWP-fossil	Climate change, fossil	kg CO ₂ -Eq.	4.79E+00	3.26E-01	3.00E-03	0.00E+00	0.00E+00	7.14E-03	1.68E-02	5.83E-03	-1.04E+00
GWP-biogenic	Climate change, biogenic	kg CO ₂ -Eq.	-1.53E-01	0.00E+00	1.53E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
GWP-luluc	Climate change, land use and land use change	kg CO ₂ -Eq.	5.73E-03	3.47E-03	4.21E-06	0.00E+00	0.00E+00	7.59E-05	3.57E-05	3.89E-06	-7.53E-04
ODP	Ozone depletion	kg CFC-11 Eq.	1.96E-10	5.59E-14	7.16E-15	0.00E+00	0.00E+00	1.22E-15	2.22E-13	5.56E-15	1.97E-08
AP	Acidification	Mole of H ⁺ eq.	2.90E-02	2.12E-03	1.05E-05	0.00E+00	0.00E+00	4.64E-05	8.70E-05	1.40E-05	-1.63E-03
EP-freshwater	Eutrophication, freshwater	kg P eq.	1.60E-05	9.08E-07	7.87E-08	0.00E+00	0.00E+00	1.99E-08	3.36E-08	1.07E-06	-1.57E-06
EP-marine	Eutrophication, marine	kg N eq.	4.04E-03	1.05E-03	4.70E-06	0.00E+00	0.00E+00	2.30E-05	3.89E-05	1.21E-05	-2.34E-04
EP-terrestrial	Eutrophication, terrestrial	Mole of N eq.	4.37E-02	1.14E-02	4.65E-05	0.00E+00	0.00E+00	2.49E-04	4.26E-04	5.13E-05	-2.49E-03
POCP	Photochemical ozone formation, human health	kg NMVOC eq.	1.27E-02	2.00E-03	1.36E-05	0.00E+00	0.00E+00	4.38E-05	1.04E-04	2.91E-05	-1.07E-03
ADP-minerals&metals	Resource use, mineral and metals	kg Sb eq.	5.54E-04	2.24E-08	1.73E-10	0.00E+00	0.00E+00	4.91E-10	3.11E-09	1.20E-10	-2.33E-04
ADP-fossil	Resource use, fossils	MJ	5.66E+01	4.31E+00	2.33E-02	0.00E+00	0.00E+00	9.45E-02	2.89E-01	4.05E-02	-8.59E+00
WDP	Water use	m ³ world equiv.	1.19E+00	1.54E-03	1.71E-03	0.00E+00	0.00E+00	3.37E-05	2.53E-03	1.88E-04	1.29E+00
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption										

*All use phase stages have been considered and only those with non-zero values have been reported

The following table contains disclaimers from EN 15804+A2 for the impact categories used above.

ILCD classification	Indicator	Disclaimer
ILCD Type 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
ILCD Type 2	Acidification potential, Accumulated Exceedance (AP)	None
	Eutrophication potential, Fraction of nutrients reaching freshwater end compartment (EP-freshwater)	None
	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
ILCD Type 3	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2
Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.		
Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.		

Results shown below were calculated using EN 15804+A2 (EF 3.1) Methodology.

Additional Mandatory Impact Assessment											
Parameter	Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D
GWP-GHG	Climate change - GHG	kg CO2-Eq.	4.80E+00	3.29E-01	3.00E-03	0.00E+00	0.00E+00	7.22E-03	1.68E-02	5.83E-03	-1.04E+00
PM	Particulate matter	Disease incidences	3.11E-07	9.23E-09	7.64E-11	0.00E+00	0.00E+00	2.02E-10	7.24E-10	1.41E-10	-1.17E-08
IR-human health	Ionising radiation, human health	kBq U235 eq.	1.86E-01	1.17E-03	1.64E-04	0.00E+00	0.00E+00	2.56E-05	5.18E-03	7.37E-05	-2.61E-02
Ecotox	Ecotoxicity, freshwater	CTUe	3.40E+01	5.61E+00	1.52E-02	0.00E+00	0.00E+00	1.23E-01	9.92E-02	5.18E-02	-1.56E+00
HT-cancer	Human toxicity, cancer	CTUh	3.66E-09	7.57E-11	4.99E-13	0.00E+00	0.00E+00	1.66E-12	4.38E-12	1.07E-12	-1.68E-09
HT-non cancer	Human toxicity, non-cancer	CTUh	3.90E-08	4.23E-09	2.35E-11	0.00E+00	0.00E+00	9.27E-11	9.97E-11	6.88E-11	-1.14E-07
LU	Land use	Pt	3.89E+01	1.91E+00	5.65E-03	0.00E+00	0.00E+00	4.18E-02	9.27E-02	3.89E-03	-2.05E+00

*All use phase stages have been considered and only those with non-zero values have been reported

Results shown below were calculated using EN 15804+A2 (EF 3.1) Methodology.

Additional Mandatory Impact Assessment			
Manufacturing Country	Electricity Source	GWP-GHG	Unit
China - South	CN: Electricity grid mix - South Sphera	5.49E-01	kg CO2-Eq./kWh

Results below contain the resource use throughout the life cycle of the product.

Resource Use											
Parameter	Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D
PERE	Renewable primary energy as energy carrier	MJ	1.33E+01	3.25E-01	8.49E-02	0.00E+00	0.00E+00	7.12E-03	1.39E-01	4.40E-03	1.02E-01
PERM	Renewable primary energy resources as material utilization	MJ	1.60E+00	0.00E+00	-1.60E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	Total renewable primary energy resources	MJ	1.49E+01	3.25E-01	-1.52E+00	0.00E+00	0.00E+00	7.12E-03	1.39E-01	4.40E-03	1.02E-01
PENRE	Nonrenewable primary energy as energy carrier	MJ	5.66E+01	4.31E+00	3.99E-02	0.00E+00	0.00E+00	9.45E-02	2.89E-01	4.05E-02	-8.59E+00
PENRM	Nonrenewable primary energy as material utilization	MJ	8.97E-02	0.00E+00	-7.16E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-1.81E-02	0.00E+00
PENRT	Total non-renewable primary energy	MJ	5.66E+01	4.31E+00	-3.17E-02	0.00E+00	0.00E+00	9.45E-02	2.89E-01	2.24E-02	-8.59E+00
SM	Use of secondary material	kg	1.43E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	Use of renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	Use of nonrenewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	Use of net fresh water	m ³	2.88E-02	1.61E-04	4.20E-05	0.00E+00	0.00E+00	3.52E-06	1.09E-04	5.62E-06	2.99E-02
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water										

**All use phase stages have been considered and only those with non-zero values have been reported*

Results below contain the output flows and wastes throughout the life cycle of the product.

Output Flows and Waste Categories											
Parameter	Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D
HWD	Hazardous waste disposed	kg	4.95E-08	1.73E-10	1.74E-11	0.00E+00	0.00E+00	3.79E-12	2.73E-10	6.46E-12	-1.77E-09
NHWD	Non-hazardous waste disposed	kg	2.60E-01	6.02E-04	7.15E-03	0.00E+00	0.00E+00	1.32E-05	1.62E-04	4.10E-02	-4.44E-02
HLRW	High-level radioactive waste	kg or m ³	2.00E-03	8.14E-06	1.07E-06	0.00E+00	0.00E+00	1.78E-07	3.15E-05	4.99E-07	1.66E-05
ILLRW	Intermediate- and low-level radioactive waste	kg or m ³	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CRU	Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MR	Materials for recycling	kg	0.00E+00	0.00E+00	2.56E-02	0.00E+00	0.00E+00	0.00E+00	9.49E-01	0.00E+00	0.00E+00
MER	Materials for energy recovery	kg	0.00E+00	0.00E+00	9.03E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EE	Recovered energy exported from system	MJ	0.00E+00	0.00E+00	9.58E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

**All use phase stages have been considered and only those with non-zero values have been reported*


Results below contain direct greenhouse gas emissions and removals throughout the life cycle of the product.

Resource Use											
Parameter	Parameter	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D
BCRP	Biogenic Carbon Removal from Product	kg CO ₂	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEP	Biogenic Carbon Emissions from Product	kg CO ₂	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCRK	Biogenic Carbon Removal from Packaging	kg CO ₂	1.53E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK	Biogenic Carbon Emissions from Packaging	kg CO ₂	0.00E+00	0.00E+00	1.53E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW	Biogenic Carbon Emissions from Combustion of Waste from Renewable Sources Used in Production Process	kg CO ₂	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCE	Calcination Carbon Emissions	kg CO ₂	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCR	Carbonation Carbon Removal	kg CO ₂	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CWNR	Carbon Emissions from Combustion of Waste from Non-renewable Sources Used in Production Process	kg CO ₂	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

*All use phase stages have been considered and only those with non-zero values have been reported

LCA Interpretation

The raw materials, raw material transportation, and production (A1-A3) phases were the most impactful stages in the cradle-to-grave impacts. These results were influenced by the energy and resources needed to create the raw materials (primarily metals), electricity during manufacturing, and fuel processing. Benefits were achieved in Module D from the recycling of metals and electronic components.

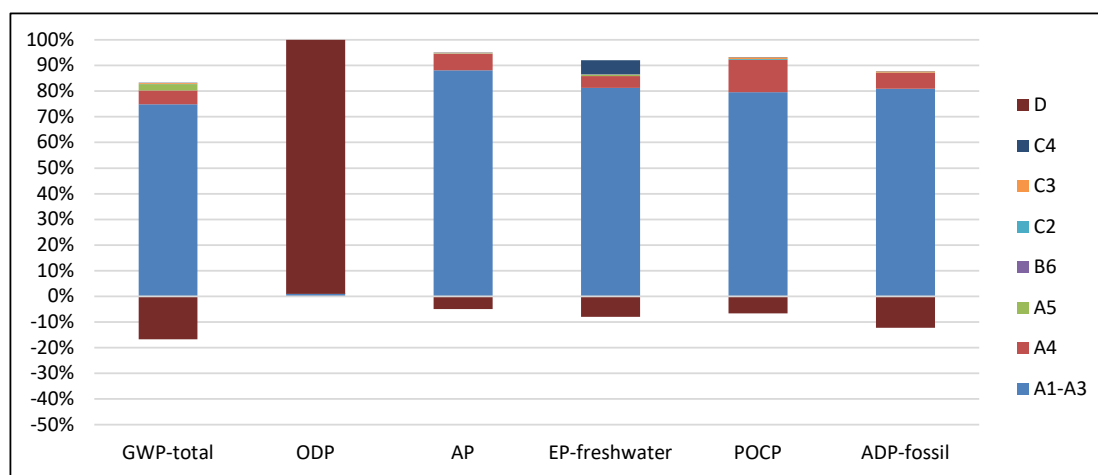

Additional Environmental Information

Environmental and Health During Manufacturing:

ASSA ABLOY is committed to producing and distributing opening solutions with minimal environmental impact, where health & safety is the primary focus for all employees and associates.

- Environmental operations, GHG, energy, water, waste, VOC, surface treatment, and H&S are being routinely monitored. Inspections, audits, and reviews are conducted periodically to ensure that applicable standards are met and environment management program effectiveness is evaluated.
- Code of Conduct covers human rights, labor practices and decent work. Management of ASSA ABLOY is aware of their environmental roles and responsibilities, providing appropriate training, supporting accountability, and recognizing outstanding performance.
- Any waste metals during machining are separated and recycled. Where applicable, the waste from the water-based painting process is delivered to waste treatment plant.

Environmental and Health During Installation:

There is no harmful emissive potential. No damage to health or impairment is expected under normal use corresponding to the intended use of the product.

Environmental Activities and Certifications:

ASSA ABLOY works hard to minimize the environmental impacts of its business activities through various corporate-wide sustainability initiatives. To learn more, please visit:
<https://www.assaabloy.com/sv/com/sustainability/sustainability-report/>

Further Information:

ASSA ABLOY EMEA
Olympia Dolla
Head of Sustainability Program EMEA
olympia.dolla@assaabloy.com
3rd Floor, Dukes Court
Woking, Surrey GU215BH
England
<https://www.assaabloy.com/group/en/sustainability>

Version History

2026-08-26	Original version of the EPD.
------------	------------------------------

References

- LCA for Experts 10.6 thinkstep.one. LCA for Experts Life Cycle Assessment version 10.6 (software).
- ISO 14025 ISO 14025:2011-10, Environmental labels and declarations — Type III environmental declarations — Principles and procedures.
- ISO 14040 ISO 14040:2006-07, Environmental management — Life cycle assessment — Principles and framework.
- ISO 14044 ISO 14044:2006-10, Environmental management — Life cycle assessment — Requirements and guidelines.
- PCR PCR 2019:14 Construction products, version 2.0.1
- EN 15804 EN 15804+A2:2019: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction product.
- EPD International 2021 EPD International (2021) General Programme Instructions for the International EPD® System. Version 5.0. www.environdec.com.
- EN 17610 EN 17610:2022, Building Hardware - Environmental product declarations - Product category rules complementary to EN15804 for building hardware.
- CEN/TR 16970 CEN/TR 16970:2016, Sustainability of construction works - Guidance for the implementation of EN 15804.
- EN 17213 EN 17213:2020, Windows and doors - Environmental Product Declarations - Product category rules for windows and pedestrian doorsets.
- PCR 2019:14 c-PCR to PCR 2019:14 BUILDING HARDWARE (EN 17610:2022) VERSION: 2022-11-04
- Sphera Database Sphera, Search Life Cycle Assessment Datasets (fka GaBi), 2023 Dataset Documentation. <https://sphera.com/product-sustainability-gabi-data-search/>
- EN 50693 EN 50693:2019 Product category rules for life cycle assessments of electronic and electrical products and systems
- EN 15941 EN 15941:2024 Sustainability of construction works - Data quality for environmental assessment of products and construction work - Selection and use of data

Contact Information

Study Commissioner



ASSA ABLOY EMEA
Olympia Dolla
Head of Sustainability Program EMEIA
olympia.dolla@assaabloy.com
3rd Floor, Dukes Court
Woking, Surrey GU215BH
England
<https://www.assaabloy.com/group/en/sustainability>

LCA Practitioner



Sustainable Solutions Corporation
155 Railroad Plaza, Suite 203
Royersford, PA 19468 USA
(+1) 610 569-1047
info@sustainablesolutionscorporation.com
www.sustainablesolutionscorporation.com

Appendix: Products Covered Under EPD

Item Number	Product Number	Product Name
9125502506	P000047582-050-050	1255/2-50 DR.1+3 bulk per 50
9125502507	P000047582-052-050	1255/2-50 DR.2+4 bulk per 50
9125502531	P000047582-020-100	1255/2-50 DR.1+3 blis.
9125502533	P000047582-020-200	1255/2-50 DR.1+3 krimp
9125502536	P000047582-020-250	1255/2-50 DR.1+3 blis. bulk per 250
9125505531	P000047582-050-100	1255/5-50 DR.1+3 blis.
9125505533	P000047582-050-200	1255/5-50 DR.1+3 krimp
9125505536	P000047582-050-250	1255/5-50 DR.1+3 blis. bulk per 250
9125517501	P000047582-170-010	1255/17-50 DR.1+3 bulk per 10
9125517502	P000047582-172-010	1255/17-50 DR.2+4 bulk per 10
9125517521	P000047582-270-010	1255/17-50 DR.1+3 zwaar bulk per 10
9125517531	P000047582-170-100	1255/17-50 DR.1+3 blis.
9125517533	P000047582-170-200	1255/17-50 DR.1+3 krimp
9125531506	P000047582-310-050	1255/31-50 DR.1+3 bulk per 50
9125531507	P000047582-312-050	1255/31-50 DR.2+4 bulk per 50
9125534533	A000124870	1255/34-50 DR.1+3 OXLOC bulk per 10
9125536506	P000047582-360-052	55/36-50 DR.1+3 THEUMA/NEMEF bulk per
9125536507	A000124872	55/36-50 DR.2+4 THEUMA/NEMEF bulk per
9125538533	A000124873	1255/38-50 DR.1+3 OXLOC bulk per 10
9125583506	P000047582-830-010	1255/83-50 DR.1+3 bulk per 50
9125583507	P000047582-830-020	1255/83-50 DR.2+4 bulk per 50
9125587501	P000047582-450-013	1255/87-50 DR.1+3 4TECX bulk per 10
9125587502	A000124875	1255/87-50 DR.2+4 4TECX bulk per 10
9125602495	P000047584-020-050	1256/2-50 bulk per 50
9125602500	P000047584-020-010	1256/2-50 bulk per 10
9125602530	P000047584-020-100	1256/2-50 blis.
9125602535	P000047584-020-200	1256/2-50 krimp
9125605535	P000047584-050-200	1256/5-50 krimp
9125617500	P000047584-170-010	1256/17-50 bulk per 10
9125617535	P000047584-170-200	1256/17-50 krimp
9125631505	P000047584-310-050	1256/31-50 bulk per 50
9125634535	A000124887	1256/34-50 OXLOC bulk per 10
9125636505	P000047584-360-052	56/36-50 DR.1+3 THEUMA/NEMEF bulk per
9125638535	A000124888	1256/38-50 OXLOC bulk per 10
9125682500	P000047584-420-013	1256/82-50 4TECX bulk per 10
9125683505	P000047584-830-010	1256/83-50 bulk per 50
9125687500	P000047584-450-013	1256/87-50 4TECX bulk per 10
9125802500	P000471231-020-010	1258/2-50 bulk per 10
9125802505	P000471231-020-050	1258/2-50 bulk per 50
9125817500	P000471231-170-010	1258/17-50 bulk per 10
9125834535	A000124892	1258/34-50 OXLOC bulk per 10
9125838535	A000124893	1258/38-50 OXLOC bulk per 10
9125882500	P000471231-820-013	1258/82-50 4TECX bulk per 10
9125883505	P000471231-830-010	1258/83-50 bulk per 50

Item Number (cont.)	Product Number (cont.)	Product Name (cont.)
9125887500	P000471231-870-013	1258/87-50 4TECX bulk per 10
9126404501	P000047601-040-010	1264/4-50 DR.1+3 bulk per 10
9126404502	P000047601-042-010	1264/4-50 DR.2+4 bulk per 10
9126404506	P000047601-040-050	1264/4-50 DR.1+3 bulk per 50
9126404507	P000047601-042-050	1264/4-50 DR.2+4 bulk per 50
9126404521	P000047601-240-010	1264/4-50 DR.1+3 zwaar bulk per 10
9126404531	P000047601-040-100	1264/4-50 DR.1+3 blis.
9126404533	P000047601-040-200	1264/4-50 DR.1+3 krimp
9126404536	P000047601-040-250	1264/4-50 DR.1+3 blis. bulk per 250
9126405531	P000047601-050-100	1264/5-50 DR.1+3 blis.
9126405533	P000047601-050-200	1264/5-50 DR.1+3 krimp
9126417501	P000047601-170-010	1264/17-50 DR.1+3 bulk per 10
9126417502	P000047601-172-010	1264/17-50 DR.2+4 bulk per 10
9126417521	P000047601-270-010	1264/17-50 DR.1+3 zwaar bulk per 10
9126417531	P000047601-170-100	1264/17-50 DR.1+3 blis.
9126417533	P000047601-170-200	1264/17-50 DR.1+3 krimp
9126431506	P000047601-310-050	1264/31-50 DR.1+3 bulk per 50
9126431507	P000047601-312-050	1264/31-50 DR.2+4 bulk per 50
9126434533	A000124908	1264/34-50 DR.1+3 OXLOC bulk per 10
9126436506	P000047601-360-052	64/36-50 DR.1+3 THEUMA/NEMEF bulk per
9126436507	A000124910	64/36-50 DR.2+4 THEUMA/NEMEF bulk per
9126438533	A000124911	1264/38-50 DR.1+3 OXLOC bulk per 10
9126483506	P000047601-830-010	1264/83-50 DR.1+3 bulk per 50
9126483507	P000047601-830-020	1264/83-50 DR.2+4 bulk per 50
9126484501	P000047601-430-013	1264/84-50 DR.1+3 4TECX bulk per 10
9126484502	A000124912	1264/84-50 DR.2+4 4TECX bulk per 10
9126487501	P000047601-450-013	1264/87-50 DR.1+3 4TECX bulk per 10
9126487502	A000124913	1264/87-50 DR.2+4 4TECX bulk per 10
9126604496	P000047616-041-050	1266/4-50 DR.1+3 bulk per 50
9126604497	P000047616-042-050	1266/4-50 DR.2+4 bulk per 50
9126604501	P000047616-050-104	1266/4-50 DR.1+3 bulk per 10
9126604502	P000047616-042-010	1266/4-50 DR.2+4 bulk per 10
9126604521	P000047616-050-904	1266/4-50 DR.1+3 zwaar bulk per 10
9126604531	P000047616-041-100	1266/4-50 DR.1+3 blis.
9126604533	P000047616-041-200	1266/4-50 DR.1+3 krimp
9126604536	P000047616-041-250	1266/4-50 DR.1+3 blis. bulk per 250
9126604541	P000047616-045-010	1266/4-50/1210 DR.1+3 bulk per 10
9126604551	P000047616-046-010	1266/4-50/1220 DR.1+3 bulk per 10
9126604561	P000047616-047-010	1266/4-50/1230 DR.1+3 bulk per 10
9126604571	P000047616-048-010	1266/4-50/1240 DR.1+3 bulk per 10
9126604581	P000047616-049-010	1266/4-50/1250 DR.1+3 bulk per 10
9126605531	P000047616-051-100	1266/5-50 DR.1+3 blis.
9126605533	P000047616-051-200	1266/5-50 DR.1+3 krimp
9126605536	P000047616-051-250	1266/5-50 DR.1+3 blis. bulk per 250
9126617501	P000047620-050-017	1266/17-50 DR.1+3 bulk per 10
9126617502	P000047616-172-010	1266/17-50 DR.2+4 bulk per 10
9126617521	P000047616-050-917	1266/17-50 DR.1+3 zwaar bulk per 10

Item Number (cont.)	Product Number (cont.)	Product Name (cont.)
9126617531	P000047616-171-100	1266/17-50 DR.1+3 blis.
9126617533	P000047616-171-200	1266/17-50 DR.1+3 krimp
9126631506	P000047616-311-050	1266/31-50 DR.1+3 bulk per 50
9126631507	P000047616-312-050	1266/31-50 DR.2+4 bulk per 50
9126634533	P000047616-342-020	1266/34-50 DR.1+3 OXLOC bulk per 10
9126636506	P000047616-361-050	66/36-50 DR.1+3 THEUMA/NEMEF bulk per
9126636507	P000047616-362-050	66/36-50 DR.2+4 THEUMA/NEMEF bulk per
9126638533	P000047616-381-020	1266/38-50 DR.1+3 OXLOC bulk per 10
9126683506	P000047616-830-010	1266/83-50 DR.1+3 bulk per 50
9126683507	P000047616-830-020	1266/83-50 DR.2+4 bulk per 50
9126684501	P000047616-841-010	1266/84-50 DR.1+3 4TECX bulk per 10
9126684502	P000047616-842-010	1266/84-50 DR.2+4 4TECX bulk per 10
9126687501	P000047616-871-010	1266/87-50 DR.1+3 4TECX bulk per 10
9126687502	P000047616-872-010	1266/87-50 DR.2+4 4TECX bulk per 10
9126904501	P000047637-001-004	1269/4-50 DR.1+3 bulk per 10
9126904502	P000047637-002-010	1269/4-50 DR.2+4 bulk per 10
9126904506	P000047637-001-050	1269/4-50 DR.1+3 bulk per 50
9126904507	P000047637-002-050	1269/4-50 DR.2+4 bulk per 50
9126904521	P000047637-001-104	1269/4-50 DR.1+3 zwaar bulk per 10
9126904531	P000047637-001-100	1269/4-50 DR.1+3 blis.
9126904533	P000047637-001-200	1269/4-50 DR.1+3 krimp
9126904536	P000047637-001-250	1269/4-50 DR.1+3 blis. bulk per 250
9126905531	P000047637-001-205	1269/5-50 DR.1+3 blis.
9126905533	P000047637-051-200	1269/5-50 DR.1+3 krimp
9126917501	P000047637-171-010	1269/17-50 DR.1+3 bulk per 10
9126917502	P000047637-172-010	1269/17-50 DR.2+4 bulk per 10
9126917506	P000047637-171-050	1269/17-50 DR.1+3 bulk per 50
9126917507	P000047637-172-050	1269/17-50 DR.2+4 bulk per 50
9126917521	P000047637-175-010	1269/17-50 DR.1+3 zwaar bulk per 10
9126917531	P000047637-171-100	1269/17-50 DR.1+3 blis.
9126917533	P000047637-171-200	1269/17-50 DR.1+3 krimp
9126934533	P000047637-341-020	1269/34-50 DR.1+3 OXLOC bulk per 10
9126936506	P000471676-059-036	69/36-50 DR.1+3 THEUMA/NEMEF bulk per
9126936507	P000047637-362-050	69/36-50 DR.2+4 THEUMA/NEMEF bulk per
9126937501	P000047642-050-037	1269/37-50 DR.1+3 bulk per 10
9126937502	P000047637-372-010	1269/37-50 DR.2+4 bulk per 10
9126938533	P000047637-381-020	1269/38-50 DR.1+3 OXLOC bulk per 10
9126983506	P000047637-830-010	1269/83-50 DR.1+3 bulk per 50
9126983507	P000047637-830-020	1269/83-50 DR.2+4 bulk per 50
9126984501	P000047637-841-010	1269/84-50 DR.1+3 4TECX bulk per 10
9126984502	P000047637-842-010	1269/84-50 DR.2+4 4TECX bulk per 10
9126987501	P000471236-050-087	1269/87-50 DR.1+3 4TECX bulk per 10
9126987502	P000047637-872-010	1269/87-50 DR.2+4 4TECX bulk per 10
A000191169	P000047582-170-050	1255/17-50 DR.1+3 bulk per 50
A000191170	P000047584-170-050	1256/17-50 bulk per 50
A000191171	P000471231-170-050	1258/17-50 bulk per 50
A000191172	P000047601-170-050	1264/17-50 DR.1+3 bulk per 50

Item Number (cont.)	Product Number (cont.)	Product Name (cont.)
A000191173	P000047616-171-050	1266/17-50 DR.1+3 bulk per 50
A000318039	P000047584-350-010	1256/3-50 bulk per 10
A000318040	P000471231-030-010	1258/3-50 bulk per 10
A000318041	P000047601-350-010	1264/3-50 DR.1+3 bulk per 10
A000318042	P000047616-350-010	1266/3-50 bulk per 10
A000318043	P000047637-350-010	1269/3-50 bulk per 10
P000047582-331-010	P000047582-331-010	1255/33-50 DR.1+3 OXLOC bulk per 10
P000047582-350-100	P000047582-350-100	1255/3-50 DR.1+3 blis.
P000047582-350-200	P000047582-350-200	1255/3-50 DR.1+3 krimp
P000047584-350-200	P000047584-350-200	1256/3-50 krimp
P000047601-331-010	P000047601-331-010	1264/33-50 DR.1+3 OXLOC bulk per 10
P000047601-350-100	P000047601-350-100	1264/3-50 DR.1+3 blis.
P000047601-350-200	P000047601-350-200	1264/3-50 DR.1+3 krimp
P000047616-331-010	P000047616-331-010	1266/33-50 DR.1+3 OXLOC bulk per 10
P000047616-350-100	P000047616-350-100	1266/3-50 DR.1+3 blis.
P000047616-350-200	P000047616-350-200	1266/3-50 DR.1+3 krimp
P000047637-331-010	P000047637-331-010	1269/33-50 DR.1+3 OXLOC bulk per 10
P000047637-350-100	P000047637-350-100	1269/3-50 DR.1+3 blis.
P000047637-350-200	P000047637-350-200	1269/3-50 DR.1+3 krimp
P001112017-100-050	P001112017-100-050	1255/73-50 bulk per 50
P001112017-150-050	P001112017-150-050	1255/77-50 bulk per 50
P001112017-200-050	P001112017-200-050	1264/73-50 bulk per 50
P001112017-250-050	P001112017-250-050	1264/77-50 bulk per 50
P001112017-300-050	P001112017-300-050	1269/73-50 bulk per 50
P001112017-350-050	P001112017-350-050	1269/77-50 bulk per 50
P001571806-010-050	P001571806-010-050	1255/85-50 DR.1+3 KREPEL bulk per 50
P001571806-011-050	P001571806-011-050	1255/85-50 DR.2+4 KREPEL bulk per 50
P001571806-020-050	P001571806-020-050	1256/85-50 KREPEL bulk per 50
P001571806-021-050	P001571806-021-050	1258/85-50 KREPEL bulk per 50
P001571806-030-050	P001571806-030-050	1264/85-50 DR.1+3 KREPEL bulk per 50
P001571806-031-050	P001571806-031-050	1264/85-50 DR.2+4 KREPEL bulk per 50
P001571806-040-050	P001571806-040-050	1266/85-50 DR.1+3 KREPEL bulk per 50
P001571806-041-050	P001571806-041-050	1266/85-50 DR.2+4 KREPEL bulk per 50
P001571806-050-050	P001571806-050-050	1269/85-50 DR.1+3 KREPEL bulk per 50
P001571806-051-050	P001571806-051-050	1269/85-50 DR.2+4 KREPEL bulk per 50