


Distributed controller EAC-TPT / EAC-TPH / EAC-TMP

ASSA ABLOY


Quick start guide




EAC-TPT

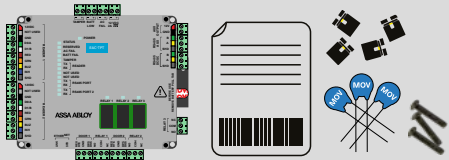

EAC-TPH

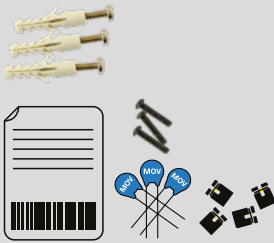


EAC-TMP

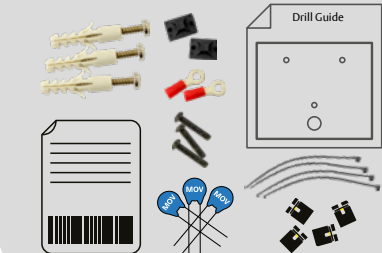





EAC-TPT

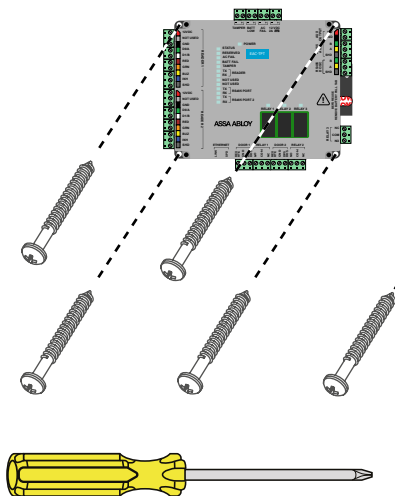



EAC-TMP

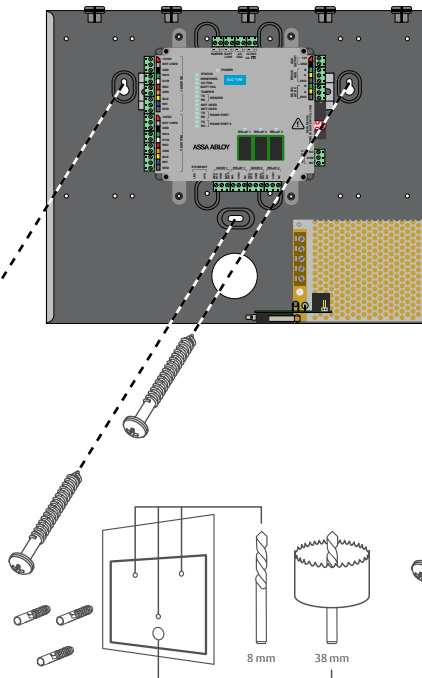


EAC-TPH

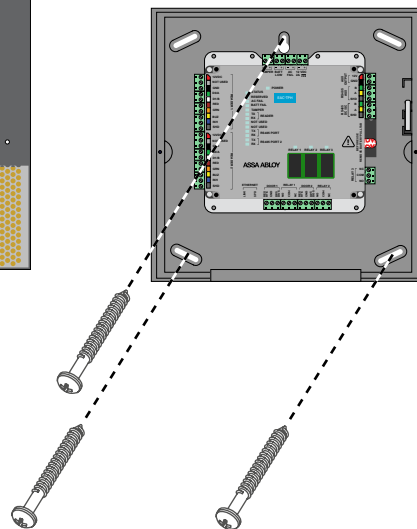

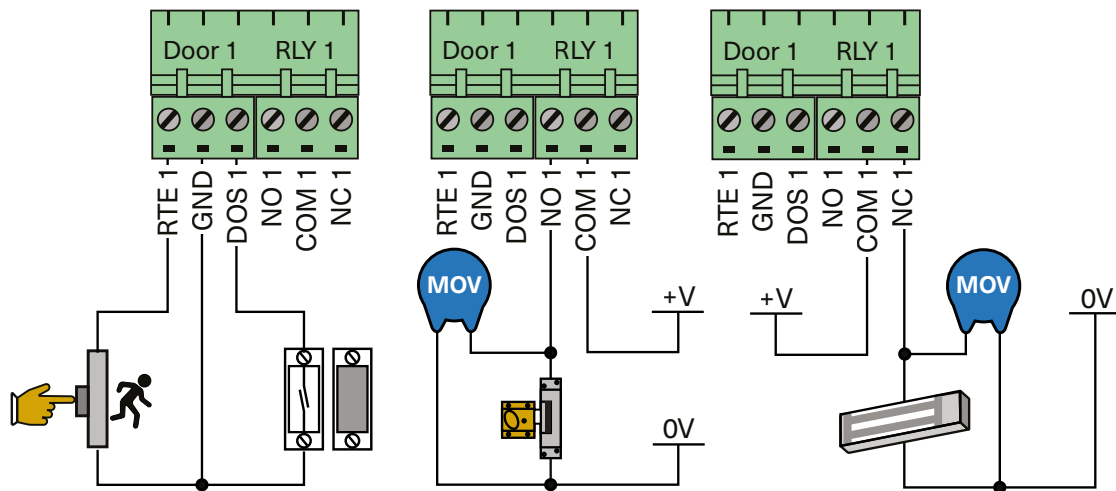



Wiegand
26, 32, 34, 35, 37, 40, 42, 44, 48-bit,
Tag + PIN / Reason
(Sagem MA100, MA200, MA300, J)



Wiegand Open




OSDP with Parity




OSDP

<150 m 20 AWG


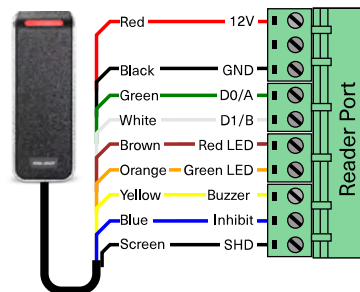


<150 m 20 AWG

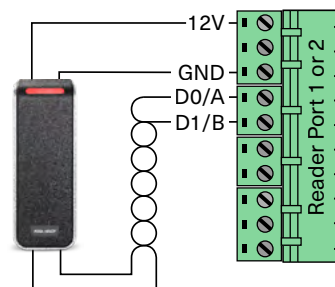


**OSDP
EOL Jumper**


<1 000 m full RS-485 EIA/TIA





Incedo Lite controller MODE




Incedo Plus / Primo MODE





Device controller MODE



RS485 EOL Jumper




RS485 <1 km 24AWG 100Ω 52pF/m






Powering up EAC-TPT and EAC-TPH



AC Power Outlet


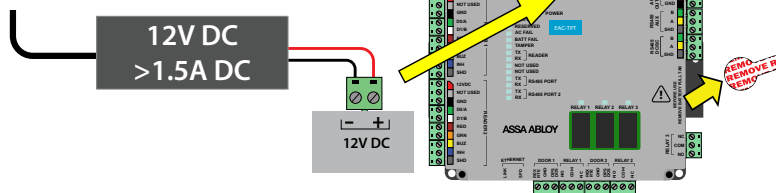


Powering up EAC-TMP

AC Power Outlet

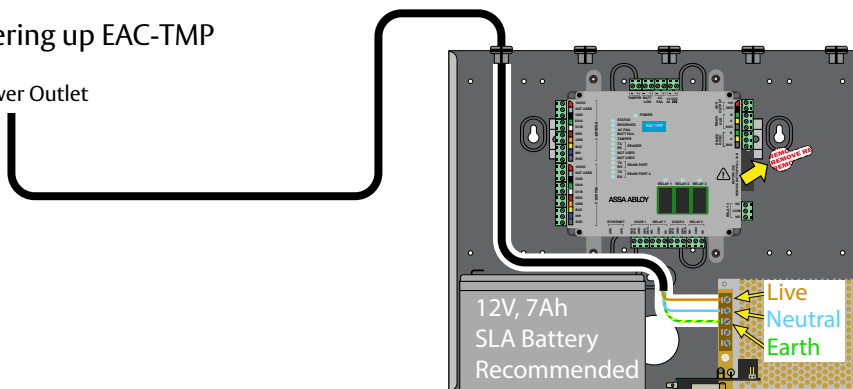

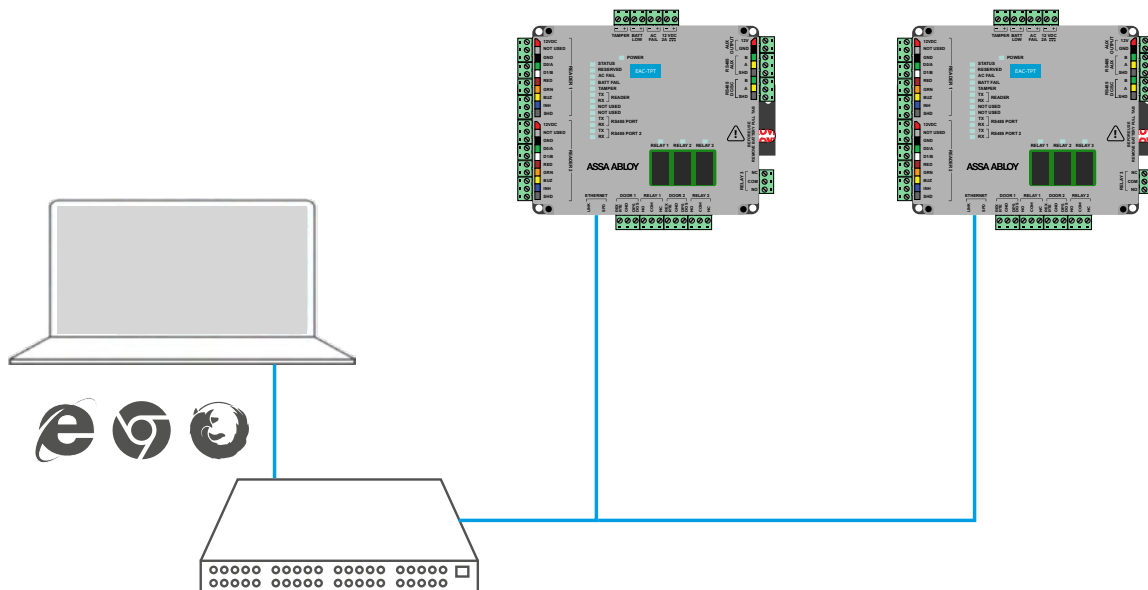

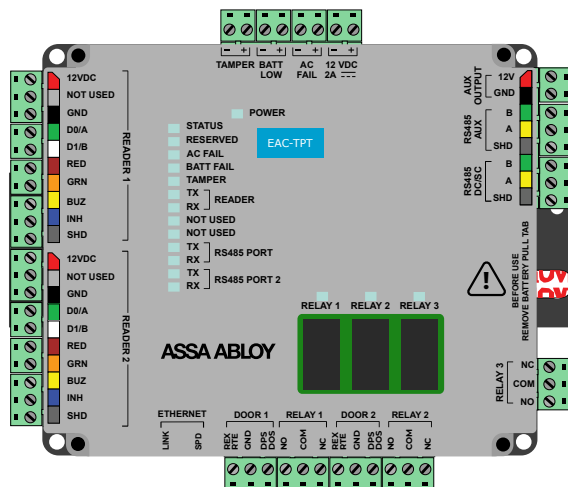

EAC-TPT
EAC-TPH
EAC-TMP

