

Steel door glazing / double-leaf

TECHNICAL DATA:


Glazing flange: • profiled steel sheet 1,5 mm, plasticised finish in RAL colours

Flange fixing: • visible screws on one side

Rubber gasket: • self-extinguishing, black


Dimensions:


- dimension line 185 mm (for EI30 and EI60) is the minimum distance of glass from the leaf edge (on the door face-hinge side) and 285 mm (for EI90)
- dimension line 300 is the minimum distance of glass from the floor
- the largest single glass pane: 1130 x 2450 mm
- any combination in between min and max surfaces is possible




	<i>Internal GLASS</i>			<i>External GLASS</i>		
Model	EI 30-101-16	EI 60-101-25	EI 90-101-37	EI 30-201-33	EI 60-201-42	EI 90-201-55
Trademark	Assa Abloy Metalind Firerated Glass	Assa Abloy Metalind Firerated Glass	Assa Abloy Metalind Firerated Glass	Assa Abloy Metalind Firerated Glass	Assa Abloy Metalind Firerated Glass	Assa Abloy Metalind Firerated Glass
UV Resistance	NO	NO	NO	YES	YES	YES
Maximum Width [m]	1130 mm	1130 mm	1130 mm	1130 mm	1130 mm	1130 mm
Maximum Height [m]	2450 mm	2450 mm	2450 mm	2450 mm	2450 mm	2450 mm
Maximum Area [m²]	2,76 m²	2,76 m²	2,76 m²	2,76 m²	2,76 m²	2,76 m²
Internal / External	Internal	Internal	Internal	External	External	External
Tempered	NO	NO	NO	NO	NO	NO
Weight [kg/m²]	39 kg/m²	59 kg/m²	88 kg/m²	47kg/m²	67 kg/m²	96 kg/m²
Thickness [mm]	16mm+-1mm	25mm+-1mm	37mm+-1mm	33mm+-1mm	42mm+-1mm	55mm+-1mm

Leaf glazing design:

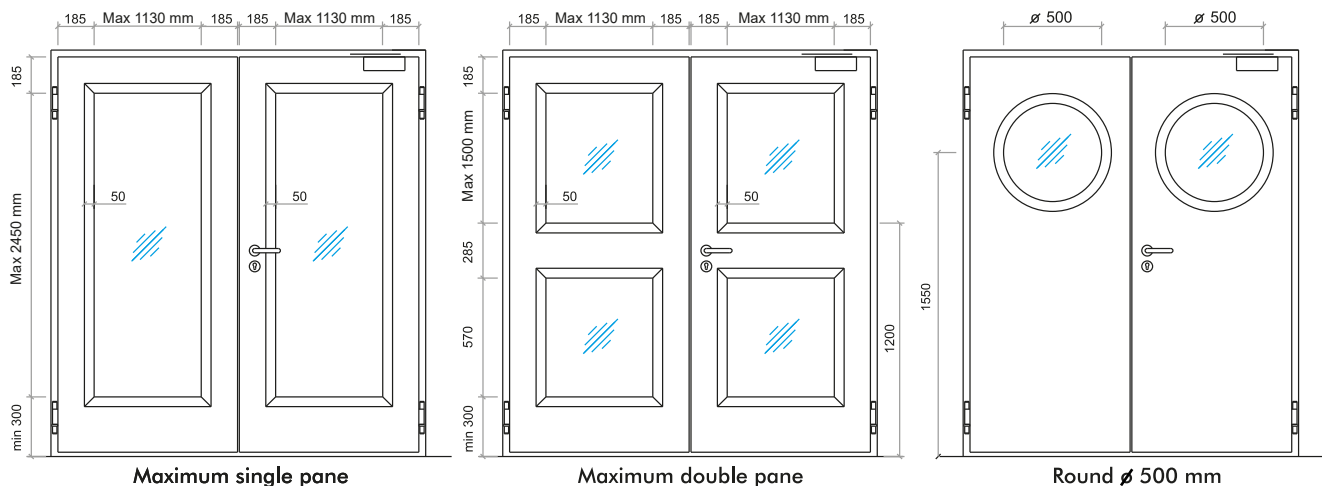


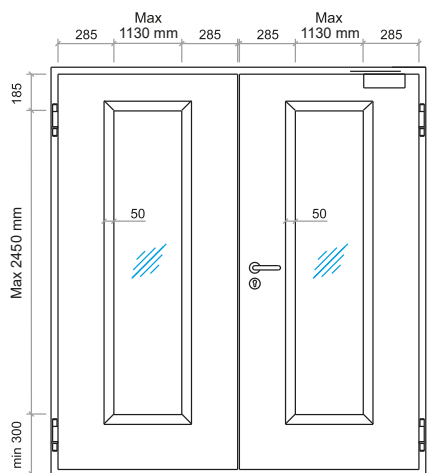

Maximum single pane – next to handle

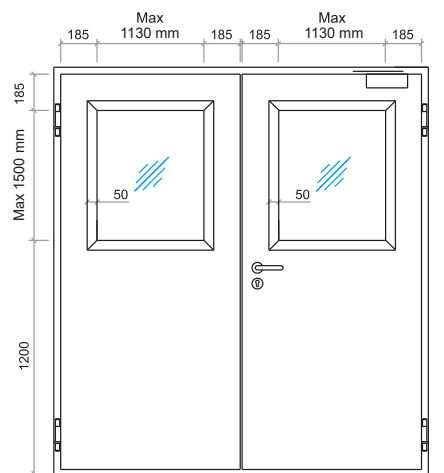

Maximum single pane - top

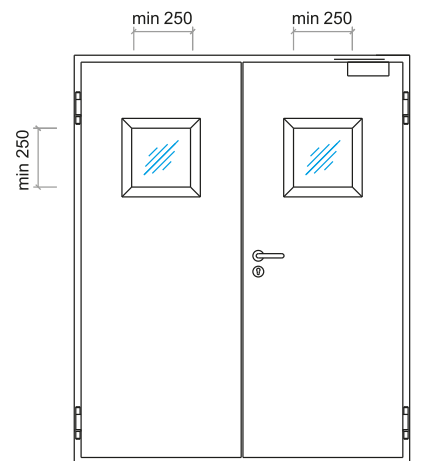

Minimum

