

Profile- half cylinder eCLIQ N532

Without key

IKON
 ASSA ABLOY


Product description

- Available as rotary secured or electronical version (V=)
- Brass cylinder housing components
- Standard finish, satin nickel-plated (OF=MV)
- Basic cylinder length of 30 mm (A) (L=30) - Other installation lengths available - Adaptable housing kit
- Optional, differing basic cylinder length of 28 mm (A) (L=28)
- Standard locking cam position 45°; differing locking cam positions available in 30° and 45° steps
- Standard with rigid connection (VAR=STARR) and free adjustable locking cam set to 45° (SST=FLEX).
Differing locking cam positions available
- Optionally available with double locking cam (VAR=K901310-X-BIFFAR)
- Optional with SST=FZG possible
- Free-wheeling function only without VAR=STARR
- Optionally available with anti drilling protection class 2 (AB=2)
- Cam made of break-proof, corrosion-resistant stainless steel
- Maintenance-free for up to 200,000 cycles
- Dust and rain cover available (SUR=3) IP55
- Splash-proof IP54
- Optionally VdS (SZ=VDS-BZ+, AB=3)
- Optionally DIN EN 15684 with anti drilling protection class 2 (SZ=DIN, AB=2)
- Optionally available for use in potentially-explosive atmospheres in Zone 1 (ATEX=II 2G EX IB IIB T4 Gb)

Scope of delivery



- 1 profile half-cylinder
- 1 cylinder fixing screw M5 x 85 mm

Suitable ASSA ABLOY products

- Mini safe 9M37,AUS=PZ VOR
- Mini safe 9M38,AUS=PZ VOR
- Mini safe 9M39,AUS=PZ VOR
- Mini safe 9M40,AUS=PZ VOR

Variants that can be ordered

Article number	OF=	L=	V=
N532	MV	30	D
	MV	30	E

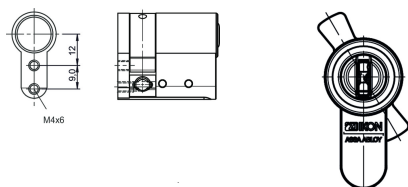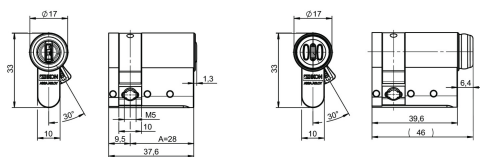

VAR=K901310-X-BIFFAR

