

# Aperio® Communication Hub

**ASSA ABLOY**  
Opening Solutions

Control up to 64 doors with the Aperio communication hubs for indoor use

Experience a safer  
and more open world

The communication between the hubs and the Aperio devices happens in real time. Encrypted radio communication.

Integrated antenna with the option to mount an external antenna.

The hubs are easy and cost-effective to install.

Built in tamper switch. Detection of removal from bracket.

The range of the transmission path to the Aperio lock devices is up to 25 m.

Event Log in the hub.

For standard electrical installation boxes with 60mm fixing screw distance. They fit in standard flush mounted boxes.

The user receives a quick overview of the status of the hub and locks connected via an LED signal pattern (communication, activation, status, etc).

Firmware upgrade possibilities.



## AH40 Gen5 Communication Hub

- For connection to EAC system
- TCP/IP communication encrypted using TLS 1.1/1.2
- Control up to 64 locks
- PoE (Powered over Ethernet) or external power supply

## AH30 Gen5 Communication Hub

- Connection to the EAC system via RS485 bus (addressable)
- Control up to 16 locks

## AH20 Standard Wiegand Gen5 Communication Hub


- 1 to 1 communication
- For connection to EAC system via Wiegand interface
- Compatible with most access control systems – no protocol integration needed

## AH20 Advanced Wiegand Gen5 Communication Hub

- 1 to 1 communication
- For connection to EAC system via Wiegand interface
- Compatible with most access control systems – no protocol integration needed
- Four specific function relay outputs: These relay outputs can be connected to the controller.

# Aperio® Communication Hub

Technical data and features		Model name			
		AH40 Gen5	AH30 Gen5	AH20 Standard Gen5	AH20 Advanced Gen5
✓	Approvals	CE, ETL, FCC, IC, C-Tick, CB, UK CA	CE, ETL, FCC, IC, C-Tick, UK CA	CE, ETL, FCC, IC, C-Tick, UK CA	CE, ETL, FCC, IC, C-Tick, UK CA
	Safety and Emissions	IEC 62368-1:2014, EN 62368-1:2014 + A11:2017, UL/CSA 62368-1:2014, EN 301 489-1 V2.1.1, EN 301 489-17 V3.2.0, EN 300 328 V2.2.2, EN 50130-4:2011 + A1:2014, EN 62311, FCC 47CFR Part 15 subpart B and subpart C, ISSED RSS-247 and ICES-003, AS/NZS 4268			
↔	Dimensions	82 × 82 × 37 mm (H × W × D)			
🔌	Required power supply	8-24 VDC or Power over Ethernet (PoE) PoE: IEEE 802.3af compliant class 1 Powered device (PD) External Power supply: The power supply shall be able to deliver minimum 1.2W. The power supply shall be 3 A over current protected.	8 – 24V, DC 0.8W	8 – 24V, DC 0.8W	8 – 24V, DC 2W
	Relay ratings	n/a	n/a	n/a	4 × 30VDC/15W resistive load. The messages are fixed as follows: DPS (Door Position), RX (Request to exit), Battery Alarm Output, Tamper Alarm/Lock Jammed Output.
((( )))	Radio standard	IEEE 802.15.4 (2400 – 2483,5MHz), 16 channels (11-26)	IEEE 802.15.4 (2400 – 2483,5MHz), 16 channels (11-26)	IEEE 802.15.4 (2400 – 2483,5MHz), 16 channels (11-26)	IEEE 802.15.4 (2400 – 2483,5MHz), 16 channels (11-26)
	Encryption (radio communication)	AES 128 bits			
	Receiver sensitivity	-100 dBm			
	Wireless operating range	Range of up to 25m			
((( )))	Internal antenna	2 cross polarized dipoles			
	External antenna	One reverse polarity SMA external antenna connector. AH40 is certified to be used with ASSA ABLOY external antenna AH-ANTENNA-1. If other external antenna is used it must be of same type (dipole) and not have larger antenna gain than 3.6 dBi.			
°C	Class of protection	IP 20			
	Tamper detection	Yes. Tamper switch detects removal from wall bracket. Signal to the system via communication protocol.	Yes. Tamper switch detects removal from wall bracket. Signal to the system via communication protocol.	Yes. Not functional – for future use.	Yes. Tamper switch detects removal from wall bracket. Signal to the system via wired relay output.
	Operating temperature range	5°C to 35°C			
	Relative humidity	Less than 95% (non-condensing)			
💡	Status	LED (red/green/orange)			

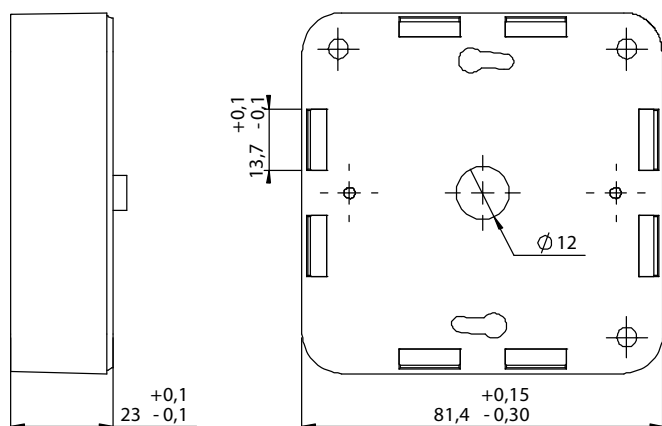

## It includes:

- 1 hub with installation instructions
- Fixing screws to mount hub to wall housing
- Wall mount bracket

## ASSA ABLOY Opening Solutions EMEA

Digital and Access Solutions  
Dukes Court  
Dukes Street  
Woking GU21 5BH  
United Kingdom

© Images: All rights reserved by ASSA ABLOY. We reserve the right to make technical modifications. Version: AA\_Aperio\_Hub\_Datasheet\_05\_2023\_ENG\_EMEA