

Product description

Version with magnet bolt counterpart, with fail-unlocked strike 138TQ53

Overview of Advantages


- Latch insertion on the door frame removed
- Visually attractive, concealed installation, magnet bolt is retracted when door open
- Low opening force due to weak keeper spring
- No closing force due to magnet bolt
- Quiet locking and unlocking
- The supplementary locking system 9338 is designed as a supplementary locking system for versatile applications for the locking of doors
- Example for other usage options: Office doors, laboratory doors, interlocks, wet cells in hospitals, special doors
- Universal installation position, vertical and horizontal
- Compatible with model 9334

Scope of delivery

- Delivery as a complete set with striking plate or as a set without striking plate

Technical data

Dimensions	Width: 16 mm , Depth: 25.5 mm , Height: 66 mm
Version	other
Latch version	other
Mounting	symmetrical
Installation position	universal
With fixing	No
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
Pulse contact	Yes
Adjustable keeper- FaFix	Yes
	No
Adjustable strike plate	No
	Yes
	No
Unlocking type	Weak version
Permanent operation (100% power-on time)	Yes
Suitable for smoke protection door	No
	3000 N
Latch adjustment range	3 mm
Load cycles for in-plant test	220000
Changeable connection	No
Clampable/ plug-in connection	No
Protective diode	No
Drill hole offset by 1 mm	No
Operating temperature range	-15-40 °C
Suitable for fire door	No
With feedback signal	No
Type of current	DC
How they work	Fail-unlocked
Max. latch preload DC	30 N
Min. preload DC	10 N
	0.1 s
Nominal operating voltage tolerance	+ - 10 %
Weak latch bolt spring	Yes
Mechanical unlocking	No
	Yes

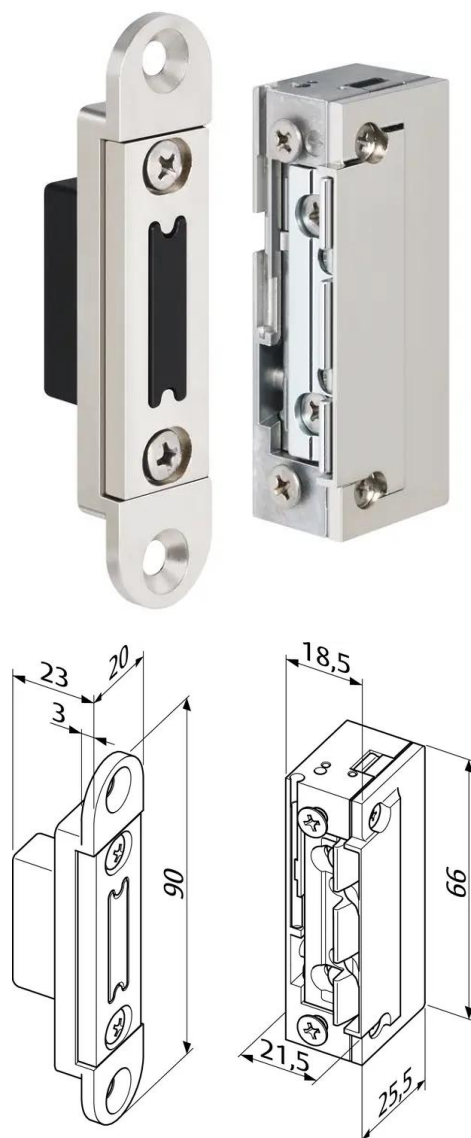

Variants that can be ordered

Order number	Description
9338-----E91	Without striking plate, 12 V DC
9338-----F91	Without striking plate, 24 V DC