
Electric strike 118.23



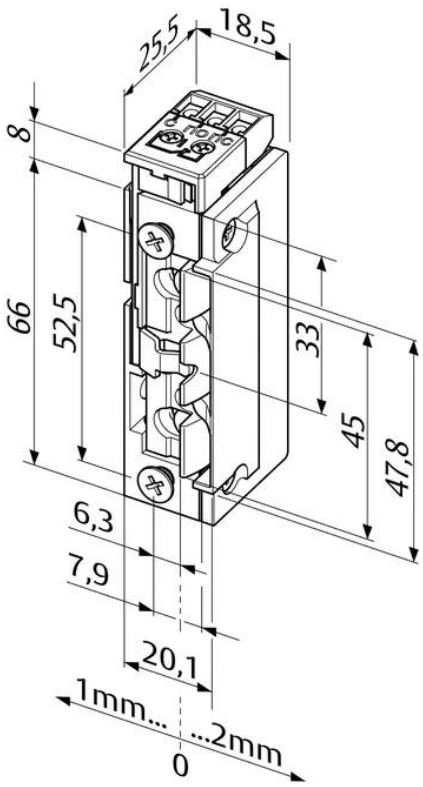

Product description

Model with monitoring contact as potential-free changeover contact, actuated by the latch bolt.

Overview of Advantages

- Radius keeper, FaFix®, adjustable by 3 mm
- Voltage range
- Compatible with current mortise locks
- Compatible with ProFix® 2 strike plates
- Optimal latch ramps for gentle interaction with the latch bolt
- Symmetrical design. DIN left/right as well as horizontal applicable

Technical data

Dimensions	Depth: 25.5 mm , Height: 74 mm , Width: 20.1 mm
Version	Standard electric strikes
Latch version	Radius keeper
Mounting	symmetrical
Installation position	universal
With fixing	No
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
Type of current	AC/DC
How they work	Fail-locked
Pulse contact	Yes
Adjustable keeper- FaFix	Yes
Adjustable electric strike – Fix	No
Adjustable strike plate	No
Latch bolt guide integrated – Profix	Yes
For strike plates with latch bolt guide	No
Suitable for smoke protection door	No
Use category according to EN 14846	3
Endurance according to EN 14846	X
Mass of the door, closing force in accordance with EN 14846	5
Suitable for fire/smoke protection doors according to EN 14846	0
Environmental condition according to EN 14846	0
Security – Burglary protection against entry in accordance with EN 14846	0
Protection against electrical manipulation in accordance with EN 14846	1
Mechanical stability (no burglary resistance)	3750 N
Latch adjustment range	3 mm
Load cycles for in-plant test	250000
Changeable connection	No
Drill hole offset by 1 mm	No
Unlock period	0.8 s
Operating temperature range	-15-40 °C
Certified in compliance with	EN 14846
Suitable for fire door	No
With feedback signal	Yes
Protective diode	No
Mechanical noise damping	No
Unlocking type	Standard version
Mechanical unlocking	No
Contact load capacity monitoring contact	1 A
Protective effect of electrical function in accordance with EN 14846	1

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20, 72458 Albstadt
Tel. + 49 7431/123-0, Albstadt@assaabloy.com
www.assaabloy.com/de

Electric strike 118.23

Variants that can be ordered

Order number	Description
118.23------A71	Without striking plate, 12-24V AC/DC
118.23------B71	Without striking plate, 22-42 V AC/DC
118.23------D11	Without strike plate, 6-12 V AC/DC

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20, 72458 Albstadt
Tel. + 49 7431/123-0, Albstadt@assaabloy.com
www.assaabloy.com/de