
Escape door strike 332.238 ProFix 2 (RRAKRR)



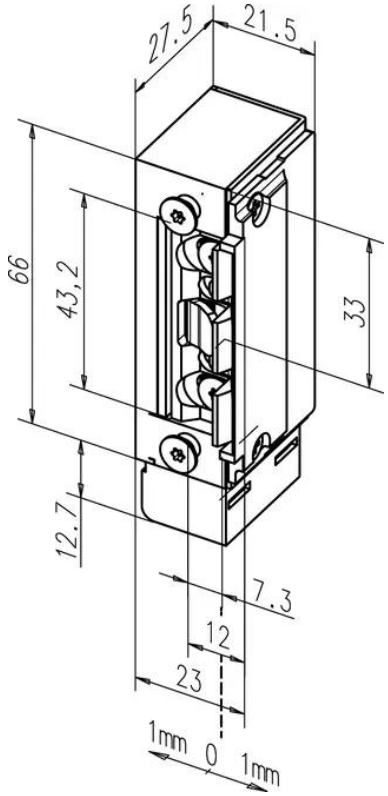

Product description

The compact construction form of the effeff 332.238 escape door strike allows rapid, uncomplicated mounting in a wide variety of profiles and door frames

Overview of Advantages

- radius keeper
- Small symmetrical construction shape
- Min. 2000 N, max. 3000 N holding force in accordance with prEN 13637
- Unlocking under pre-load with 100% holding force
- Monitoring contact is potential-free and armature contact is non-isolated *
- DL/DR and horizontal universal installation position
- Compact fitting dimensions
- Adjustable FaFix® latch: 2 mm adjustment range with 0.5 mm increments
- Compatible with ProFix® 2 strike plates
- Monitoring contact integrated in the housing
- Monitoring flap moves together with the FaFix® screw-on attachment, i.e. the switching point always remains the same
- With integrated ProFix2 cover latch bolt guide to create a continuous seal layer between the door leaf and door frame to optimise cold/heat insulation and sound insulation and improve the overall visual appearance of the door

Note

- Can only be used as a supplementary locking device on fire doors
- * Coupling Relay 7480 is required for parallel operation.

Technical data

Dimensions	Height: 78.7 mm , Depth: 28 mm , Width: 23 mm
Version	Escape door strikes
Latch version	Radius keeper
Mounting	symmetrical
Installation position	universal
With fixing	No
With feedback signal	Yes
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
Type of current	DC
How they work	Fail-unlocked
Pulse contact	No
Adjustable keeper- FaFix	Yes
Adjustable electric strike – Fix	No
Adjustable strike plate	No
Latch bolt guide integrated – Profix	No
For strike plates with latch bolt guide	No
Unlocking type	Standard version
Permanent operation (100% power-on time)	Yes
Mechanical unlocking	No
Suitable for smoke protection door	Yes
Forend shape	without
Mechanical stability (no burglary resistance)	3000 N
Max. latch preload DC	3000 N
Min. preload DC	2000 N
Latch adjustment range	2 mm
Contact load capacity monitoring contact	1 A
Load cycles for in-plant test	500000
Changeable connection	No
Clampable/ plug-in connection	No
Protective diode	Yes
Mechanical noise damping	No
Drill hole offset by 1 mm	No

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20, 72458 Albstadt
Tel. + 49 7431/123-0, Albstadt@assaabloy.com
www.assaabloy.com/de

Escape door strike 332.238 ProFix 2 (RRAKRR)

Unlock period	0.1 s
Operating temperature range	-15-40 °C
Certified in compliance with	EltVTR; EN13637
Suitable for fire door	Yes
Armature monitoring contact	Yes

Variants that can be ordered

Order number	Description
332.238-----F91	Without striking plate, 24 V DC

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20, 72458 Albstadt
Tel. + 49 7431/123-0, Albstadt@assaabloy.com
www.assaabloy.com/de