
Electric strike 128E



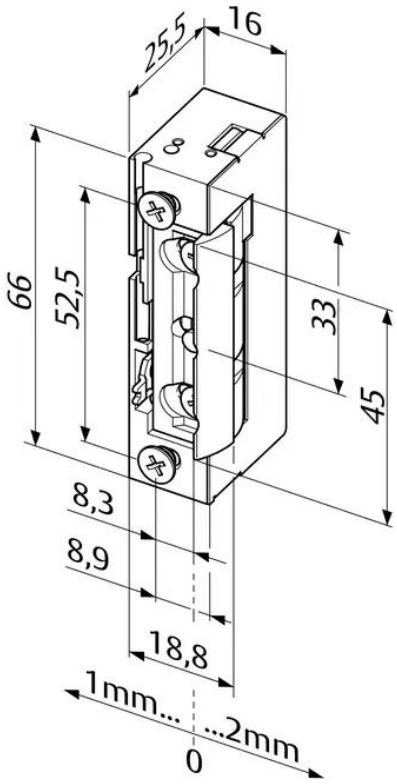

Product description

Model with mechanical unlocking.

Overview of Advantages

- Radius keeper, FaFix®, adjustable by 3 mm
- Voltage range
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Technical data

Dimensions	Height: 66 mm , Width: 16 mm , Depth: 25.5 mm
Version	Standard electric strikes
Latch version	Radius keeper
Mounting	symmetrical
Installation position	universal
With fixing	Yes
With feedback signal	No
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
Type of current	AC/DC
How they work	Fail-locked
Pulse contact	Yes
Adjustable keeper- FaFix	Yes
Adjustable electric strike – Fix	No
Adjustable strike plate	No
Latch bolt guide integrated – Profix	No
For strike plates with latch bolt guide	No
Unlocking type	Standard version
Suitable for smoke protection door	No
Use category according to EN 14846	3
Endurance according to EN 14846	X
Mass of the door, closing force in accordance with EN 14846	5
Suitable for fire/smoke protection doors according to EN 14846	0
Environmental condition according to EN 14846	0
Security – Burglary protection against entry in accordance with EN 14846	0
Protective effect of electrical function in accordance with EN 14846	0
Protection against electrical manipulation in accordance with EN 14846	1
Mechanical stability (no burglary resistance)	3750 N
Latch adjustment range	3 mm
Load cycles for in-plant test	250000
Changeable connection	No
Mechanical noise damping	No
Unlock period	0.8 s
Operating temperature range	-15-40 °C
Certified in compliance with	EN 14846
Suitable for fire door	No
Protective diode	No
Mechanical unlocking	Yes
Dead bolt cutout	No
Pre-equipped for bolt switch contact	No
Drill hole offset by 1 mm	No

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20, 72458 Albstadt
Tel. + 49 7431/123-0, Albstadt@assaabloy.com
www.assaabloy.com/de

Electric strike 128E

Variants that can be ordered

Order number	Description
128E--------A71	Without striking plate, 12-24V AC/DC
128E--------B71	Without striking plate, 22-42 V AC/DC
128E--------D11	Without strike plate, 6-12 V AC/DC

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20, 72458 Albstadt
Tel. + 49 7431/123-0, Albstadt@assaabloy.com
www.assaabloy.com/de