
Electric strike 138RR



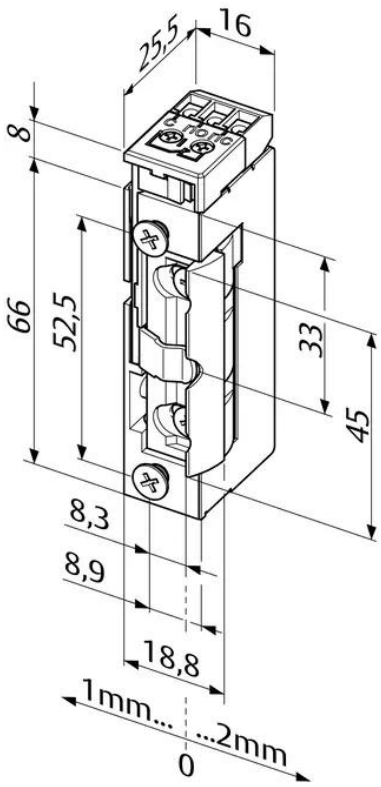

Product description

Model with monitoring contact as potential-free changeover contact, actuated by the latch bolt.

Overview of Advantages

- Radius keeper, FaFix®, adjustable by 3 mm
- Compatible with current mortise locks
- Compatible with available striking plates
- Symmetrical design. DIN left/right as well as horizontal applicable

Note

- Not an authorised locking system for doors along escape and rescue routes

Technical data

Dimensions	Width: 16 mm , Depth: 25.5 mm , Height: 74 mm
Version	Standard electric strikes
Mounting	symmetrical
Installation position	universal
With fixing	No
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
Type of current	DC
How they work	Fail-unlocked
Pulse contact	No
Adjustable keeper- FaFix	Yes
Adjustable electric strike – Fix	No
Adjustable strike plate	No
Latch bolt guide integrated – Profix	No
Unlocking type	Standard version
Permanent operation (100% power-on time)	Yes
Mechanical unlocking	No
Suitable for smoke protection door	No
Use category according to EN 14846	3
Mass of the door, closing force in accordance with EN 14846	5
Suitable for fire/smoke protection doors according to EN 14846	0
Environmental condition according to EN 14846	0
Security – Burglary protection against entry in accordance with EN 14846	0
Protection against electrical manipulation in accordance with EN 14846	1
Mechanical stability (no burglary resistance)	3750 N
Latch adjustment range	3 mm
Load cycles for in-plant test	250000
Changeable connection	No
Mechanical noise damping	No
Certified in compliance with	EN14846
Suitable for fire door	No
Latch version	Radius keeper
With feedback signal	Yes
For strike plates with latch bolt guide	No
Protective diode	No
Unlock period	0.1 s
Max. latch preload DC	30 N
Min. preload DC	10 N
Contact load capacity monitoring contact	1 A
Endurance according to EN 14846	A
Protective effect of electrical function in accordance with EN 14846	1
Operating temperature range	-15-40 °C
Drill hole offset by 1 mm	No

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20, 72458 Albstadt
Tel. + 49 7431/123-0, Albstadt@assaabloy.com
www.assaabloy.com/de

Electric strike 138RR

Nominal operating voltage tolerance	+ - 10 %

Variants that can be ordered

Order number	Description
138RR-------E91	Without striking plate, 12 V DC
138RR-------F91	Without striking plate, 24 V DC

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20, 72458 Albstadt
Tel. + 49 7431/123-0, Albstadt@assaabloy.com
www.assaabloy.com/de