

Product description

Model with monitoring contact as potential-free changeover contact. This is actuated by the latch bolt via a lever.

Overview of Advantages

- Suitable for all common striking plates
- Can be combined with striking plates with latch guide (model St.)
- Reversible design = DIN right (DR=5)


Note

- Order code for version DIN right = 14ARR

Technical data

Dimensions Depth: 28 mm , Height: 112 mm , Width: 20.5 mm

Version	Standard electric strikes
Latch version	Standard latch
Mounting	asymmetrical
With fixing	No
Waterproof	No
Mounting method	Installation
How they work	Fail-locked
Pulse contact	Yes
For strike plates with latch bolt guide	No
Unlocking type	Standard version
Suitable for smoke protection door	No
Use category according to EN 14846	3
Mass of the door, closing force in accordance with EN 14846	5
Suitable for fire/smoke protection doors according to EN 14846	0
Environmental condition according to EN 14846 N	
Security – Burglary protection against entry in accordance with EN 14846	0
Protective effect of electrical function in accordance with EN 14846	0
Protection against electrical manipulation in accordance with EN 14846	1
Load cycles for in-plant test	250000
Changeable connection	No
Clampable/ plug-in connection	No
Mechanical noise damping	No
Drill hole offset by 1 mm	No
Unlock period	0.8 s
Operating temperature range	-15-40 °C
Certified in compliance with	EN 14846
Suitable for fire door	No
Installation position	universal
With feedback signal	Yes
Opening direction according to DIN	left/right
Type of current	AC/DC
Adjustable keeper- FaFix	No
Adjustable electric strike – Fix	No
Adjustable strike plate	No
Latch bolt guide integrated – Profix	No
Protective diode	No
Mechanical unlocking	No
Contact load capacity monitoring contact	1 A

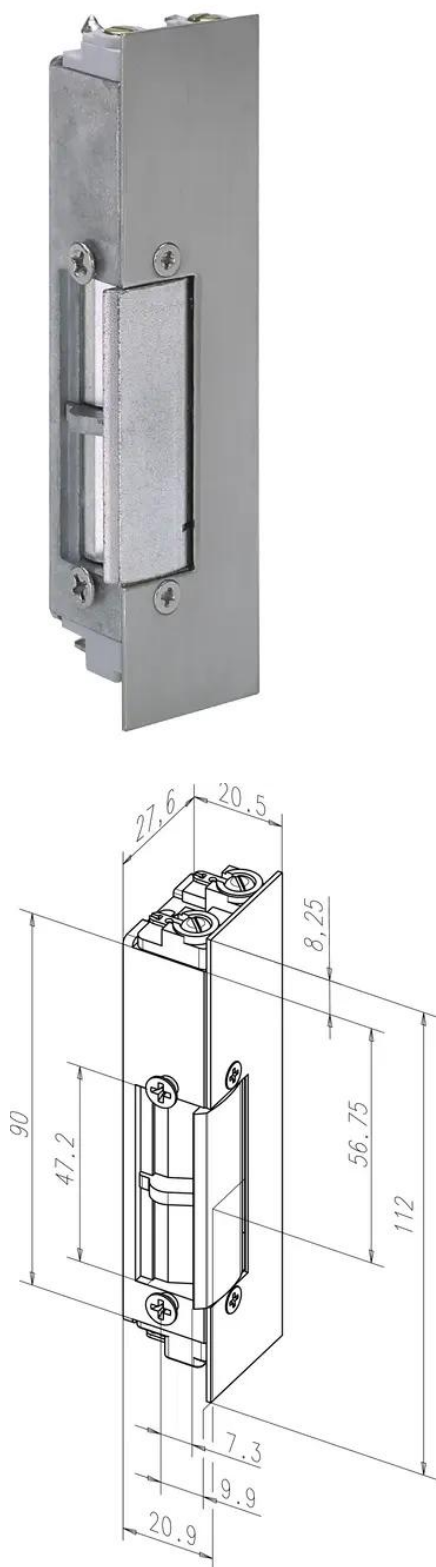

Variants that can be ordered

Order number	Description
14RR-----D11	Without strike plate, 6-12 V AC/DC
14RR-----R11	Without face plate, 8-16 V AC/DC
14RR-----F11	Without face plate, 24 V AC/DC
14RR-----E31	Without striking plate, 12 V DC electric unlocking
14RR-----F31	Without striking plate, 24 V DC electric unlocking