



Product description

Model with basic equipment.

Overview of Advantages


- Suitable for all common striking plates
- Can be combined with striking plates with latch bolt guide (standard) without FaFix®
- Due to 180° fitting, can be used DIN right and left
- Latch material: Steel

Note

- Order code for version DIN right = 24A

Technical data

Dimensions	Depth: 28 mm , Height: 90 mm , Width: 20 mm
Version	Standard electric strikes
Latch version	Standard latch
Mounting	asymmetrical
Installation position	universal
With fixing	Yes
Opening direction according to DIN	left/right
Waterproof	No
Mounting method	Installation
How they work	Fail-locked
Pulse contact	Yes
Unlocking type	Standard version
Suitable for smoke protection door	No
Use category according to EN 14846	3
Mass of the door, closing force in accordance with EN 14846	5
Suitable for fire/smoke protection doors according to EN 14846	0
Environmental condition according to EN 14846 N	
Security – Burglary protection against entry in accordance with EN 14846	0
Protective effect of electrical function in accordance with EN 14846	0
Protection against electrical manipulation in accordance with EN 14846	1
Protective diode	No
Suitable for fire door	No
With feedback signal	No
Type of current	AC/DC
Adjustable keeper- FaFix	No
Adjustable electric strike – Fix	No
Adjustable strike plate	No
Latch bolt guide integrated – Profix	No
For strike plates with latch bolt guide	No
Mechanical noise damping	No
Mechanical unlocking	No
Unlock period	0.8 s
Mechanical stability (no burglary resistance)	6500 N
Operating temperature range	-15-40 °C
Load cycles for in-plant test	250000
Changeable connection	No
Clampable/ plug-in connection	No
Drill hole offset by 1 mm	No
Certified in compliance with	EN 14846

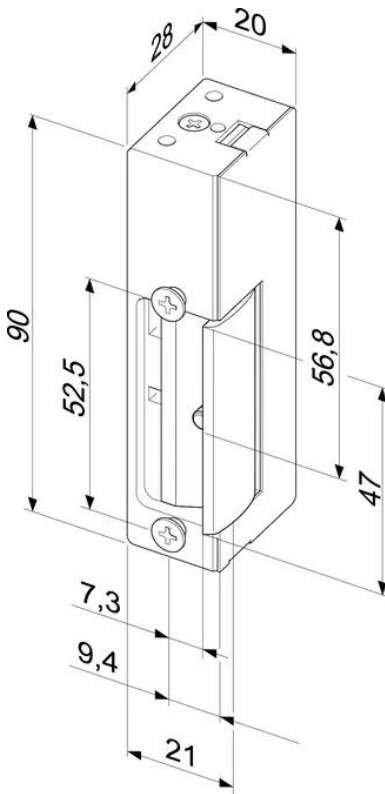

Variants that can be ordered

Order number	Description
24-----D11	Without strike plate, 6-12 V AC/DC
24-----R11	Without face plate, 8-16 V AC/DC
24-----F11	Without face plate, 24 V AC/DC
24-----E31	Without striking plate, 12 V DC electric unlocking
24-----F31	Without striking plate, 24 V DC electric unlocking