Electric strike 34RR

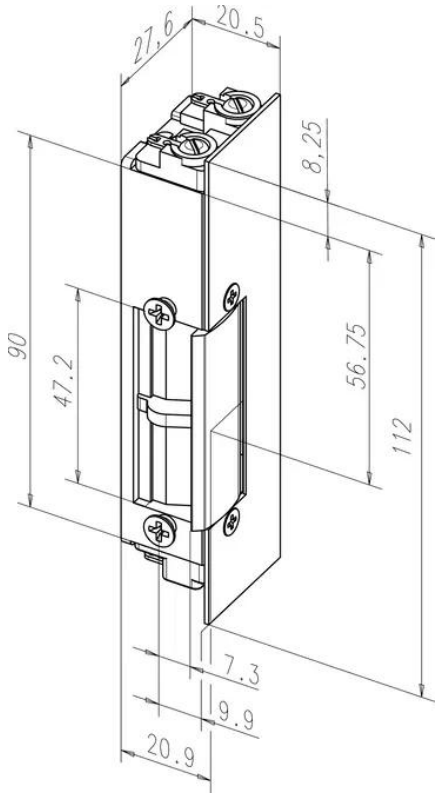

Product description

Model with monitoring contact as potential-free changeover contact. This is actuated by the latch bolt via a lever.

Overview of Advantages

- Suitable for all common striking plates
- Can be combined with striking plates with latch guide (model St.)
- Reversible design = DIN right (DR=5)

Note

- Order code for version DIN right = 34ARR

Technical data

Dimensions	Depth: 28 mm , Height: 112 mm , Width: 20.5 mm
Version	Standard electric strikes
Latch version	Standard latch
Mounting	asymmetrical
With fixing	No
Waterproof	No
Mounting method	Installation
Type of current	DC
How they work	Fail-unlocked
Pulse contact	Yes
Unlocking type	Standard version
Permanent operation (100% power-on time)	Yes
Mechanical unlocking	No
Suitable for smoke protection door	No
Max. latch preload DC	0 N
Min. preload DC	10 N
Load cycles for in-plant test	250000
Changeable connection	No
Clampable/ plug-in connection	No
Mechanical noise damping	No
Drill hole offset by 1 mm	No
Unlock period	0.1 s
Operating temperature range	-15-40 °C
Suitable for fire door	No
Installation position	universal
With feedback signal	Yes
Opening direction according to DIN	left/right
Adjustable keeper- FaFix	No
Adjustable electric strike – Fix	No
Protective diode	No
Mechanical stability (no burglary resistance)	4000 N

Variants that can be ordered

Order number	Description
34RR--------E91	Without striking plate, 12 V DC
34RR--------F91	Without striking plate, 24 V DC

ASSA ABLOY Sicherheitstechnik GmbH
Bildstockstraße 20, 72458 Albstadt
Tel. + 49 7431/123-0, Albstadt@assaabloy.com
www.assaabloy.com/de