

# Building range

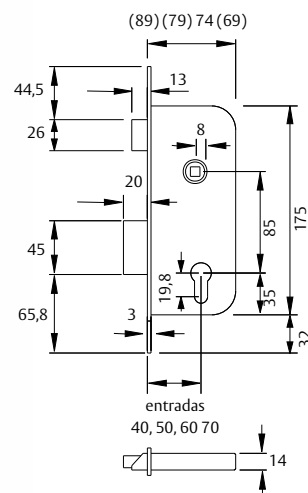
## 2030 Series

- » Sashlock for timber doors.
- » Reversible.
- » Distance between axes: 85 mm.
- » Backset: 40/ 50/ 60/ 70 mm.
- » Follower: 8 mm. Thumbturn follower: 6 mm.
- » 1/2 rounded forend available.
- » Euro-profile 5 pin cylinder made to DIN V 18254 with 3 nickel plated steel sawn keys. HL/ AE finish: brass finished cylinder. HN/ NE/ AI finish: nickel finished cylinder.
- » Packed: 1/20 units.

### Classification

| 2               | C                                 | 5                            | 0                                        | 0      | B                                     | 2                              | B                                | C                                   | 2                                     | 0                                    |
|-----------------|-----------------------------------|------------------------------|------------------------------------------|--------|---------------------------------------|--------------------------------|----------------------------------|-------------------------------------|---------------------------------------|--------------------------------------|
| Category of use | Durability and load on latch bolt | Door mass and closing force. | Suitability for use on fire/smoke doors. | Safety | Corrosion resistance and temperature. | Security and drill resistance. | Fields of application for doors. | Type of key manoeuvre and blocking. | Type of manoeuvre in the follower rod | Requirements for key identification. |

| Finish / entrance             | 40 | 50 | 60 | 70 |
|-------------------------------|----|----|----|----|
| Brass plated steel (HL)       | *  | *  | *  | *  |
| Nickel plated steel (HN)      | *  | *  | *  | *  |
| Gold enamelled steel (HE)     | *  | *  | *  | *  |
| Black (NE)                    |    | *  | *  | *  |
| Stainless Steel AISI 430 (AI) |    | *  | *  | *  |



| Finish / entrance | 40 | 50 | 60 | 70 |
|-------------------|----|----|----|----|
| 2030              | *  | *  | *  | *  |
| 2031              | *  | *  | *  | *  |
| 2034              | *  | *  | *  | *  |
| 2035              |    | *  | *  | *  |
| 2036              | *  | *  | *  | *  |

## 2030 Entrance

### Features

- » Anti-friction Silent Tech latchbolt available: Smoother operation.

### Operation

- » Reversible latchbolt withdraws from either side with levers or knobs or by cylinder.
- » 20 mm. double throw.

| 2030 | Model | Backset | Finish | Packaging |
|------|-------|---------|--------|-----------|
|      | 2030  | 40 / 50 | HL     | 1 / 20    |
|      | 2030  | 40 / 50 | HN     | 1 / 20    |
|      | 2030  | 40 / 50 | AI     | 1 / 20    |
|      | 2030  | 60 / 70 | HL     | 1 / 20    |
|      | 2030  | 60 / 70 | HN     | 1 / 20    |
|      | 2030  | 60 / 70 | AI     | 1 / 20    |

Underline: "Express 5" service.

No underline: 15 working days maximum.

## 2031 Store room

### Features

- » Deadlock. Backset: 40/ 50/ 60 mm.
- » 2031-U: Same dimensions than 2030, 2034 and 2035.

### Operation

- » 20 mm. double throw.


| 2031 | Model | Backset | Finish | Packaging |
|------|-------|---------|--------|-----------|
|      | 2031  | 40 / 50 | HL     | 1 / 20    |
|      | 2031  | 40 / 50 | HN     | 1 / 20    |
|      | 2031  | 60      | HL     | 1 / 20    |
|      | 2031  | 60      | HN     | 1 / 20    |

# Building range

## 2034 Privacy

### Operation


- » Reversible latchbolt withdraw by follower (levers or knobs).
- » 20mm. single throw deadbolt. Thumbturn operated.

| 2034                                                                              | Model | Backset | Finish  | Packaging |
|-----------------------------------------------------------------------------------|-------|---------|---------|-----------|
|  | 2034  | 40 / 50 | HL / HN | 1 / 20    |
|                                                                                   | 2034  | 40 / 50 | AI      | 1 / 20    |
|                                                                                   | 2034  | 60 / 70 | AI      | 1 / 20    |
|                                                                                   | 2034  | 60 / 70 | HL / HN | 1 / 20    |
|                                                                                   |       |         |         |           |
|                                                                                   |       |         |         |           |
|                                                                                   |       |         |         |           |
|                                                                                   |       |         |         |           |

## 2036 Roller bolt

### Operation


- » 20 mm. double throw Deadbolt. Cylinder operated
- » Fixed roller bolt.

| 2036                                                                               | Model | Backset | Finish | Packaging |
|------------------------------------------------------------------------------------|-------|---------|--------|-----------|
|  | 2036  | 40 / 50 | HL     | 1 / 20    |
|                                                                                    | 2036  | 40 / 50 | HN     | 1 / 20    |
|                                                                                    | 2036  | 40 / 50 | AI     | 1 / 20    |
|                                                                                    | 2036  | 60      | HL     | 1 / 20    |
|                                                                                    | 2036  | 60      | HN     | 1 / 20    |
|                                                                                    | 2036  | 60      | AI     | 1 / 20    |
|                                                                                    |       |         |        |           |
|                                                                                    |       |         |        |           |

## 2035 Passage

### Operation


- » Reversible latchbolt withdraws from either side with levers or knobs.


| 2035                                                                                | Model | Backset | Finish  | Packaging |
|-------------------------------------------------------------------------------------|-------|---------|---------|-----------|
|  | 2035  | 50      | HL / HN | 1 / 20    |
|                                                                                     | 2035  | 60      | HL / HN | 1 / 20    |
|                                                                                     |       |         |         |           |
|                                                                                     |       |         |         |           |
|                                                                                     |       |         |         |           |
|                                                                                     |       |         |         |           |


## 2S30 Silent latch Series

### Features

- » Zinc alloy sprung anti-friction latchbolt: smoother operation.
- » Reversible.
- » Distance between axis 85 mm.
- » Backset: 50/60 mm.
- » 8 mm follower. 6 mm Thumb turn follower.
- » Optional rounded front plate.

| 2S30                                                                                 | Model | Backset | Finish | Packaging |
|--------------------------------------------------------------------------------------|-------|---------|--------|-----------|
|  | 2S30  | 50      | AI     | 1 / 20    |
|                                                                                      | 2S30  | 50      | HL     | 1 / 20    |
|                                                                                      | 2S30  | 50      | HN     | 1 / 20    |
|                                                                                      | 2S30  | 60      | AI     | 1 / 20    |
|                                                                                      | 2S30  | 60      | HL     | 1 / 20    |
|                                                                                      | 2S30  | 60      | HN     | 1 / 20    |
|                                                                                      |       |         |        |           |
|                                                                                      |       |         |        |           |

| 2S34                                                                                 | Model | Backset | Finish | Packaging |
|--------------------------------------------------------------------------------------|-------|---------|--------|-----------|
|  | 2S34  | 50      | AI     | 1 / 20    |
|                                                                                      | 2S34  | 50      | HL     | 1 / 20    |
|                                                                                      | 2S34  | 50      | HN     | 1 / 20    |
|                                                                                      | 2S34  | 60      | AI     | 1 / 20    |
|                                                                                      | 2S34  | 60      | HL     | 1 / 20    |
|                                                                                      | 2S34  | 60      | HN     | 1 / 20    |
|                                                                                      |       |         |        |           |
|                                                                                      |       |         |        |           |

| 2S35                                                                                 | Model | Backset | Finish | Packaging |
|--------------------------------------------------------------------------------------|-------|---------|--------|-----------|
|  | 2S35  | 50      | AI     | 1 / 20    |
|                                                                                      | 2S35  | 50      | HL     | 1 / 20    |
|                                                                                      | 2S35  | 50      | HN     | 1 / 20    |
|                                                                                      | 2S35  | 60      | AI     | 1 / 20    |
|                                                                                      | 2S35  | 60      | HL     | 1 / 20    |
|                                                                                      | 2S35  | 60      | HN     | 1 / 20    |
|                                                                                      |       |         |        |           |
|                                                                                      |       |         |        |           |