

Planet LK → 13 x 25 mm | ↓ 16 mm | 42 dB

Functions (depending on versions/options)



Possible door types (depending on options)



Floor surfaces




Main features

- Drop-down seal for wooden, metal and PVC doors
- Silicone lip protected as deeper recess
- Single-sided and silent release
- No grinding over the floor thanks to parallel lowering
- Automatic compensation for sloping floors
- High-quality silicone lip, lateral protrusion adjustable
- Easy drop height adjustment
- Can be shortened to the next smallest length
- 2-year warranty


Incl. accessories

- Planet assembly set with 2 fixing brackets (stainless steel), 2 screws and stopping plate type 1 (stainless steel)

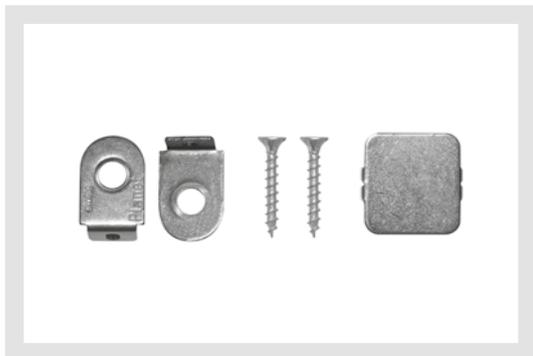

Technical specifications

Groove size	13.1 mm wide and 25.5 to 35 mm deep
Seal profile	high-quality silicone
Sound absorption value	up to 42 dB at ground air 7 mm
Frame protector plate	stainless steel, for knocking in, 20 x 20 mm
Fastening	with stainless steel mounting brackets and screws on the side
Can be shortened	max. 125 mm (335 mm only 115 mm)
Release	on one side, hinge side
Drop height adjustment	on release pin with 3 mm Allen key
Max. drop height	16 mm
Profile size	13 x 25 mm
Profile material	Aluminium

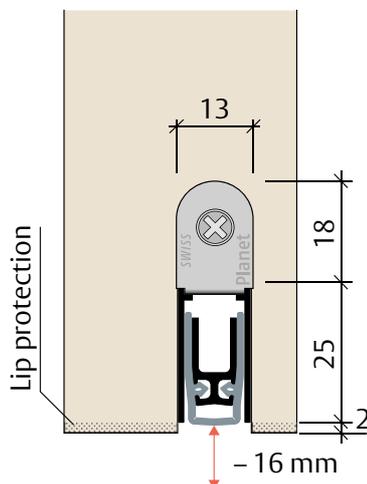

Versions

Planet LK | 42 dB (without certificate)
Industry packed, minimum order quantity 50 pcs.

Length	can be shortened to	Art. no.	EUR
335 mm	>290 mm	12034	38.60
460 mm	>335 mm	12046	33.20
585 mm	>460 mm	12059	22.00
710 mm	>585 mm	12071	22.60
835 mm	>710 mm	12084	23.20
960 mm	>835 mm	12096	23.80
1085 mm	>960 mm	12109	27.50
1210 mm	>1085 mm	12121	28.10
1335 mm	>1210 mm	12134	32.20
1460 mm	>1335 mm	12146	36.60
<6000 mm per meter		12600	50.40