

ASSA ABLOY

Sliding Door Hardware Solutions

Soft Close Roller Sets & Sliding Tracks



Engineered for Smooth Movement. Designed for Reliability.

ASSA ABLOY sliding door hardware solutions are designed to deliver smooth, quiet, and reliable door movement for residential and commercial applications. Manufactured to stringent quality requirements and finished to meet modern architectural expectations, this product range offers dependable performance, clean aesthetics, and easy integration with ASSA ABLOY sliding door lock systems.

Product Range Overview

- Soft close roller sets for wooden sliding doors
- Single and double soft close configurations
- Load capacities up to 120 kg
- Anodized aluminium sliding tracks in standard lengths

Designed for comfort, safety, and longevity, the range supports both new installations and refurbishment projects.

Key Features & Benefits


- **Smooth and Silent Operation:** Integrated soft close mechanism ensures controlled, quiet door movement, improving user comfort and perceived quality.
- **Robust Construction:** High quality metal components and precision manufacturing provide durability and consistent performance under frequent daily use.
- **Flexible Configurations:** Available in single or double soft close versions with multiple load ratings to accommodate different door sizes and weights.
- **Clean Architectural Finish:** Neutral silver and plated finishes blend seamlessly with contemporary interiors.
- **ASSA ABLOY Quality Assurance:** Products are selected and specified to meet ASSA ABLOY expectations for functionality, reliability, and long term use.

Typical Applications

- Hotel guestroom and suite sliding doors
- Residential apartments and condominiums
- Office partitions and internal meeting rooms
- Retail and commercial interior doors

Product Specification

Soft Close Roller Sets

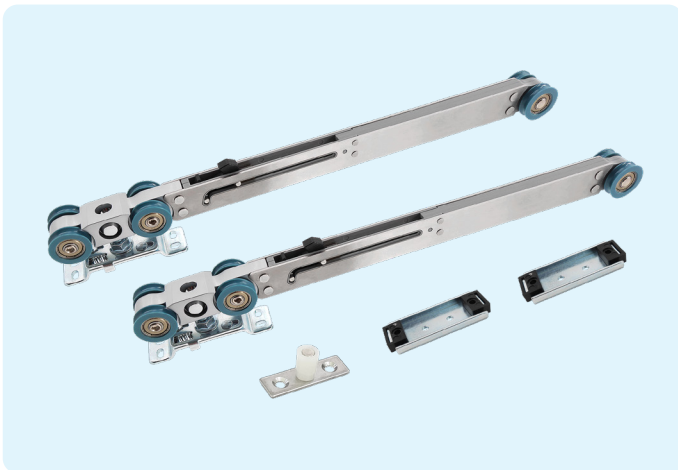

Application	Wooden sliding doors
Operation	Soft close, controlled environment
Configurations	Single soft close / Double soft close
Maximum Door Weight	100kg/120kg
Door Thickness Range	25mm to 45mm
Finish	Plated
Unit	Set



Sliding Tracks



Material	Aluminium
Finish	Anodized, silver
Standard Lengths	2000mm / 3000mm
Application	Sliding door systems
Unit	Each

Ordering Information

Soft Close Roller Sets

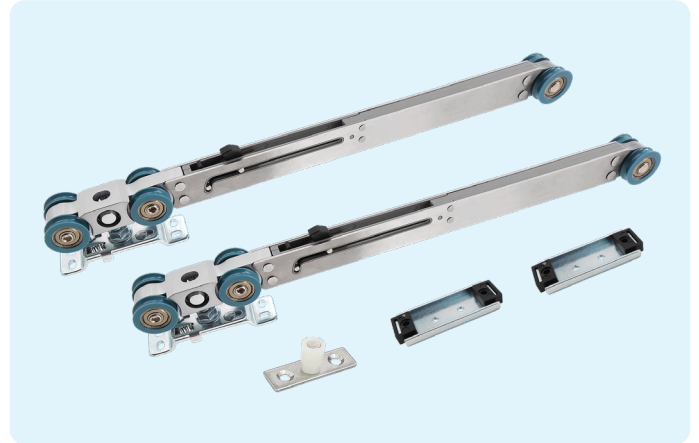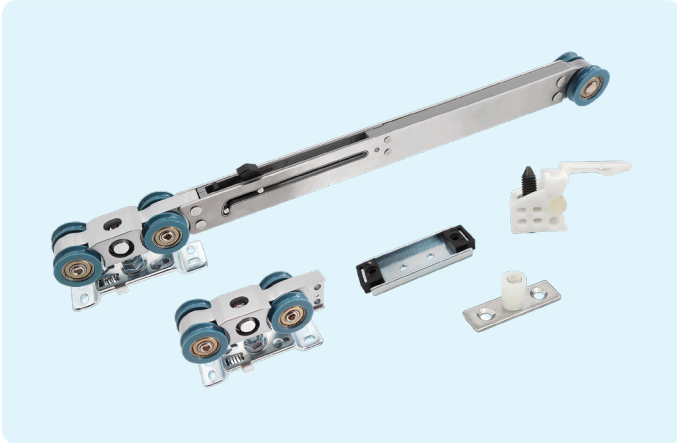

AB-SL-SC-S-100-PL	Single soft close roller set, maximum door weight 100kg
AB-SL-SC-S-120-PL	Single soft close roller set, maximum door weight 120kg
AB-SL-SC-D-100-PL	Double soft close roller set, maximum door weight 100kg
AB-SL-SC-D-120-PL	Double soft close roller set, maximum door weight 120kg

Sliding Tracks



AB-SL-TR-2000-AN	Sliding track, anodized silver, 2000mm length
AB-SL-TR-3000-AN	Sliding track, anodized silver, 3000mm length

Installation & Compatibility

- Suitable for wooden sliding doors
- Compatible with ASSA ABLOY sliding door lock solutions
- Designed for standard architectural door configurations
- Professional installation recommended

Quality & Compliance

- Manufactured under controlled industrial processes
- Consistent dimensions and surface quality
- Suitable for residential and commercial environments
- Designed to meet ASSA ABLOY appearance and performance expectations

Why ASSA ABLOY

ASSA ABLOY is the global leader in access solutions. From mechanical hardware to advanced digital access, ASSA ABLOY solutions are used worldwide to create safer, more secure, and more convenient environments. Our sliding door hardware range reflects the same commitment to quality, reliability, and long term performance

The ASSA ABLOY group is the
global leader in access solutions.
Every day, we help billions of people
experience a more open world.

assaabloy.com

ASSA ABLOY Opening Solutions
Malaysia Sdn Bhd
Level 1, East Wing, Wisma Consplant 1
No 2, Jalan SS16/4
47500, Subang Jaya
Selangor, Malaysia
Phone +60 3 5651 7800
Fax +60 3 5613 3889
info@assaabloy.com.my
assaabloy.com/my

PT ASSA ABLOY Indonesia
Pondol Indah Office Tower 5
7th Floor, Suit 707-708
Jl Sultan Iskandar Muda Kav. V-TA
Jakarta Selatan 12310,
Indonesia
Phone +62 21 2932 7910
Mobile +63 917 717 5932
info.id@assaabloy.com
assaabloy.com/id

ASSA ABLOY Philippines Inc
Unit A Ground Floor, Suntree Tower
#13 Meralco Ave. Ortigas Center
Brgy. San Antonio
Pasig City, 1605 Manila,
Philippines
Phone +63 2 8564 6615
e-mail: info.ph@assaabloy.com
assaabloy.com/ph

ASSA ABLOY Singapore Pte Ltd
#08-08 Siemens Center Blk 1
60 MacPherson Road
348615, Singapore
Phone +65 6880 0000
Fax +65 6880 0500
e-mail: sales.aasg@assaabloy.com
assaabloy.com/sg

ASSA ABLOY Vietnam
20th Floor, 2Bis-4-6
Le Thanh Ton St
Ben Nghe War, Dist 1,
Ho Chi Minh City,
Vietnam
Phone +84 28 2249 8833
info.vn@assaabloy.com
assaabloy.com/vn

ASSA ABLOY Hong Kong Ltd
16th Floor, Excel Centre,
483A Castle Peak Road
Cheung Sha Wan, Kowloon,
Hong Kong
Phone +852 2260 0888
Fax +852 2686 8682
e-mail: sales.hk@assaabloy.com
assaabloy.com/hk

ASSA ABLOY Taiwan
10F., No. 192-1, Sec.4,
Chengde Rd., Shilin Dist.,
Taipei City 11167,
Taiwan (R.O.C)
Phone +886 2 2586 0161
Fax +886 2 2586 0171
e-mail: sales.tw@assaabloy.com

ASSA ABLOY (Thailand) Ltd
9/261, Floor 26th
UM Tower Building,
Ramkhamhaeng Road,
Khwaeng Suan Luang,
Khet Suan Luang, Bangkok, 10250
Phone +66 2-180 5772
Fax +66 2-180 5774
info.th.opening@assaabloy.com
assaabloy.com/th

Legal Disclaimer:

While every effort has been made to ensure that the information contained in this technical specifications book is accurate at the time of its publication, yet ASSA ABLOY reserves its right to make changes in its products without prior notice. ASSA ABLOY will not be liable for any loss, injury or damage arising out of use of its products. The specifications book does not constitute offer for sale of its products. ASSA ABLOY advises the use of its products for installation only by trained technicians.

Experience a safer
and more open world