

# Wall Mount Door Holder

Model: EMH50-WM



ASSA ABLOY



ASSA ABLOY, the global leader  
in door opening solutions.

## Installation Instructions



### Features

- Dual Voltage Selectable (12VDC or 24 VDC)
- Emergency Release/Test button
- Wall Mounting
- Low Current Compensation
- Reliable Fail-Safe Mechanism
- Durable and Silent Operation
- Designed to AS4178 Standard


### Specifications

- Dimensions: 80Lx80Wx40H(mm)
- Voltage: 12/24VDC+10% (Selectable)
- Current Draw: 12V/140mA 24V/70mA
- Operating Temp: -10~+55°C
- Suitable Humidity: 0~95% (Relative humidity)
- Holding Force: 23kg
- Suitable for: Single & Double Fire Doors

### Dimensions

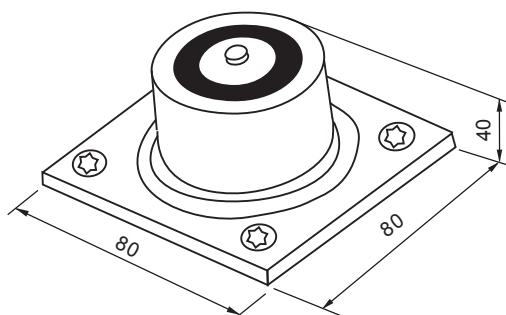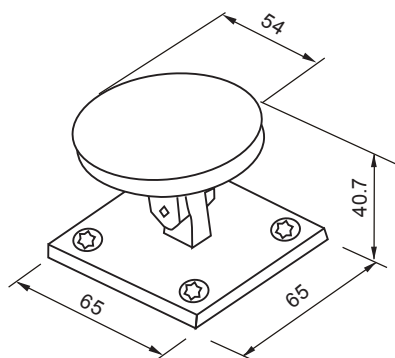

### Installation

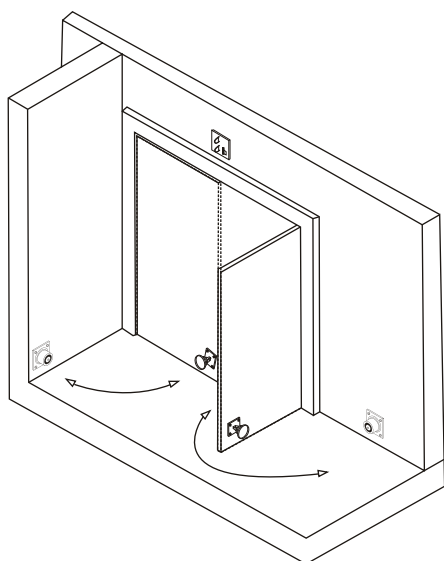


Installation

### 12/24V Adjustable

#### Notes

- The default setting is 24VDC
- To select 12 VDC see image below

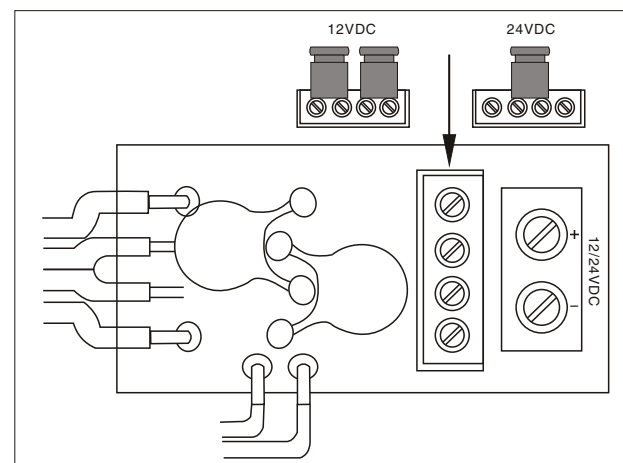

Wiring Diagram

