

## SIROCCO SELF CLOSING SYSTEM

For sliding timber and metal doors. Max. 80kg.

### APPLICATION

- Suitable for both domestic and commercial interior applications
- Designed to give a smooth and quiet operation, with a hydraulically controlled soft close feature
- Adjustable closing speed feature
- Door brake to reduce opening speed to prevent damage to the door and system
- Operational between temperature ranges of -10°C to 40°C
- Optional hold open unit giving adjustable time delay before self closing

### DOOR SPECIFICATION

|                       |                |
|-----------------------|----------------|
| <b>Track System</b>   | <b>Sirocco</b> |
| For Individual Doors: |                |
| Max Door Weight       | 80kg           |
| Min Door Width        | 800mm          |
| Max Door Width        | 1200mm         |
| Door Thickness        | 30-46mm        |

### STANDARD SETS AND PACK


Sets comprises of aluminium track (2200mm), hangers, hydraulic control unit, power spring unit, door stops, guides, roller, all screws and fitting instructions.


| Pack No.      | Application                        |
|---------------|------------------------------------|
| <b>HSIRRH</b> | Right Hand Opening                 |
| <b>HSIRLH</b> | Left Hand Opening                  |
| <b>HDELRH</b> | Delayed Closing Timer – Right Hand |
| <b>HDELLH</b> | Delayed Closing Timer – Left Hand  |

### HARDWARE SPECIFICATION

|                 |                  |  |
|-----------------|------------------|--|
| <b>Guides</b>   | <b>H102SS/94</b> | Timber doors - wall mounted and multiple run guide                                 |
|                 | <b>H105SS/94</b> | Timber doors - face mounted guide  |
|                 | <b>H106SS/94</b> | Timber doors - concealed fixing with SS bearing                                    |
| <b>Channels</b> | <b>H94X</b>      | Aluminium (2000, 3000, 4000 & 6000mm lengths)                                      |
|                 | <b>H94</b>       | Brass (4000 & 6000mm lengths)  |
|                 | <b>H94P</b>      | Polypropylene (2000, 3000, 4000 & 6000mm lengths)                                  |
|                 | <b>H94PSC</b>    | Aluminium supporting channel and polypropylene (2000, 3000, 4000 & 6000mm lengths) |

### Accessories

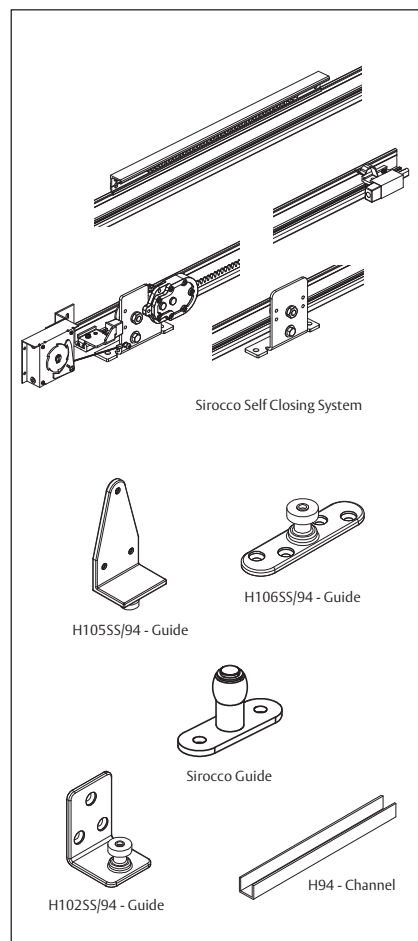

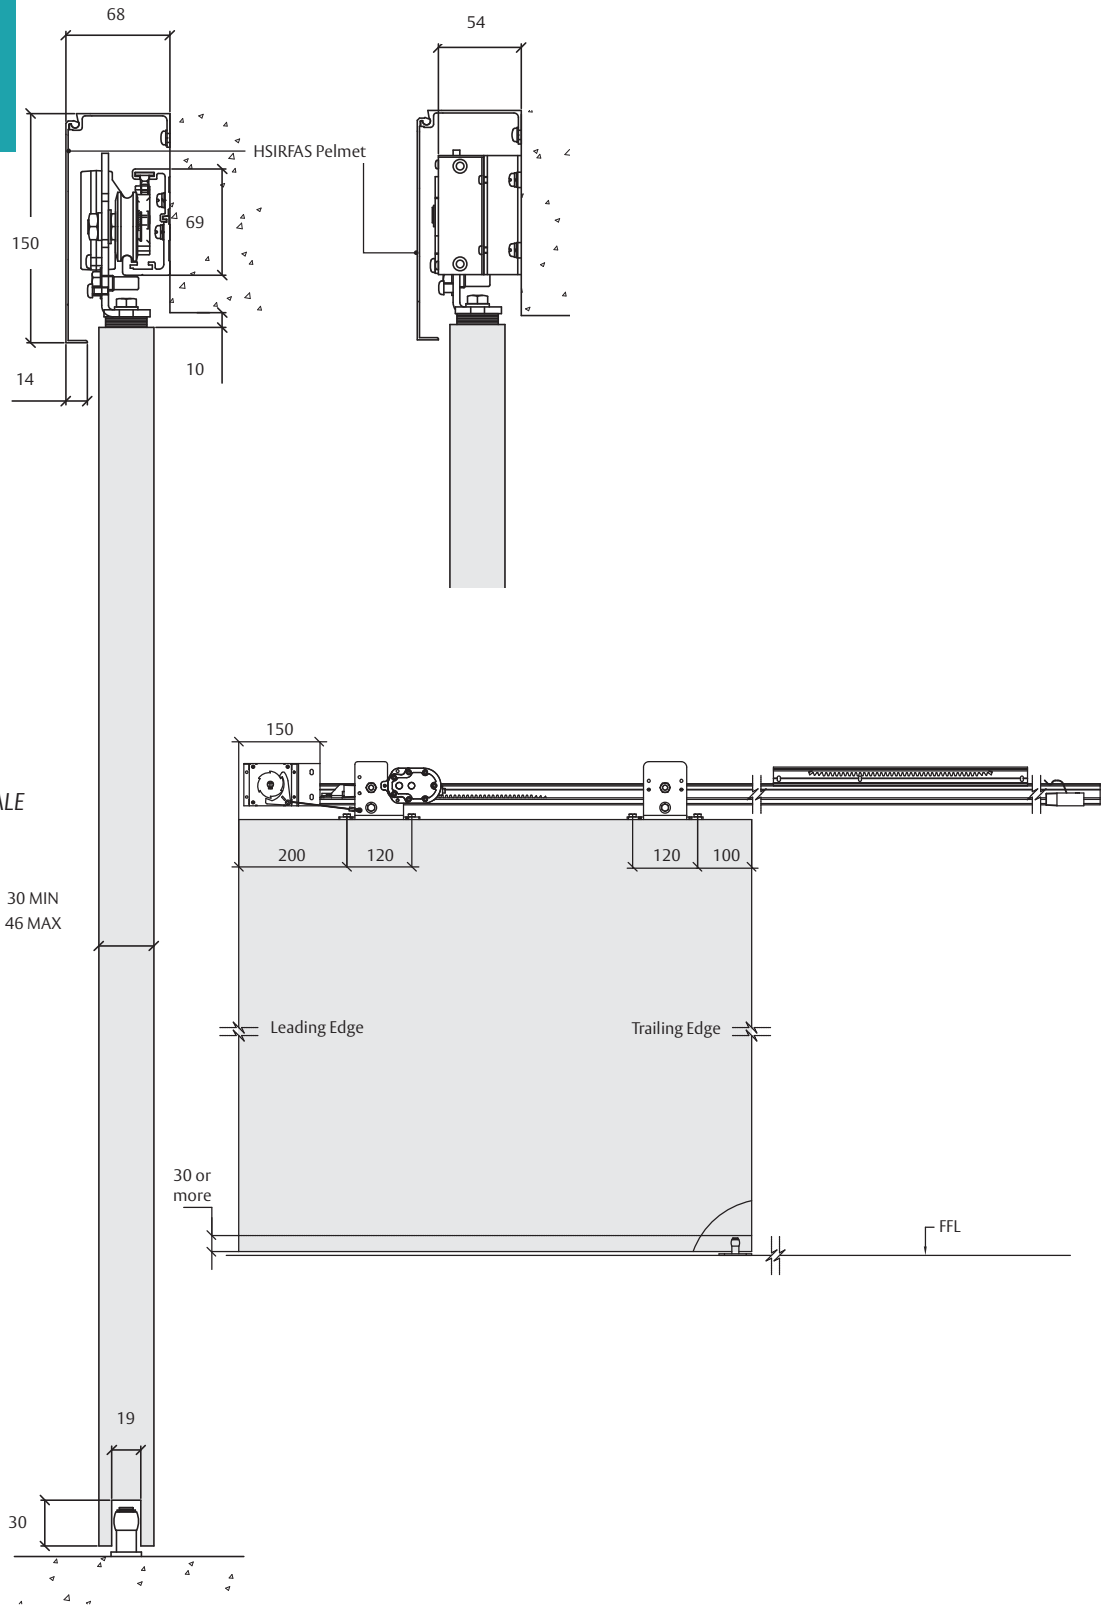

ASSA ABLOY New Zealand Ltd. PO Box 100407, North Shore, Auckland 0745 • 6 Armstrong Road, Albany, Auckland 0632, New Zealand  
Within New Zealand: Tel 09 415 8031 Fax 0800 478 297 www.assaabloy.co.nz • Outside New Zealand: Tel +64 9 921 7630 Fax +64 9 415 7222 www.assaabloy.co.nz