

SOLTAIRE 180

For top hung sliding doors. Max 180kg each.

APPLICATION

- Manufactured from high grade 316 stainless steel with anodised aluminium track
- This reliable system is extremely durable and ideal for coastal applications, heavy use or areas requiring a high level of corrosion resistance
- Designed for interior and exterior doors up to 180kg
- Ideal for residential or commercial applications
- Designed to accommodate single or multiple panels on one or more tracks
- Hangers available for timber or metal doors
- The track can be soffit fixed or face fixed to give flexibility of installation

DOOR SPECIFICATION

Track System Soltaire 180

For Individual Doors:

Max Door Weight 180kg
Door Thickness 35-48mm*
Max Panel Height 3000mm

* For doors thicker than 48mm, please contact our technical sales team for further information.


HARDWARE SPECIFICATION

Track	H180A	Anodised Aluminium (2000, 3000, 4000 & 6000mm lengths) Soffit fix spacing 900mm centres (maximum)
Brush Strips	BS10, BS15, BS20, BS25 (mm)	Available in black in 4 brush heights, by the metre
Brackets	H1/SS H5/SS	Face fixed stainless steel Double run face fixed stainless steel Starting 20mm from end of track fix at 900mm maximum centres.
Hangers (2 per door)*	H52/180/SS H53/180/SS H56/180/SS H56X/180/SS H57/180/SS H57/180/SS	Timber doors – angle plate fixing Timber doors – saddle plate fixing Metal doors – angle frame fixing Metal doors – box frame fixing Timber doors – concealed plate fixing Metal doors – concealed plate fixing
Track Stop	HH5/SS	Anodised aluminium with rubber buffer
Guides	H102SS/94 H104PX/89 H104P/89 H105SS/94 H106HSS/94	Timber doors - wall mounted and multiple run guide Metal door - box section Metal door - angle frame Timber doors - face mounted guide Timber doors - concealed fixing with SS bearing
Channels	H94X H94 H89SS H94P H94PSC	Aluminium (2000, 3000, 4000 & 6000mm lengths) Brass (4000 & 6000mm lengths) Stainless steel (2000 & 3000mm lengths) Polypropylene (2000, 3000, 4000 & 6000mm lengths) Aluminium supporting channel and polypropylene (2000, 3000, 4000 & 6000mm lengths)

Accessories

Interlocking Seal	H59BZ/4800 H59CA/4800	Bronze anodised (4800mm to suit typical 2400mm door height) Clear anodised aluminium (4800mm to suit typical 2400mm door height) Drilled and countersunk. Includes brush seal. Refer to Components Section for more information
--------------------------	--	---

IMAGE
COMING
SOON

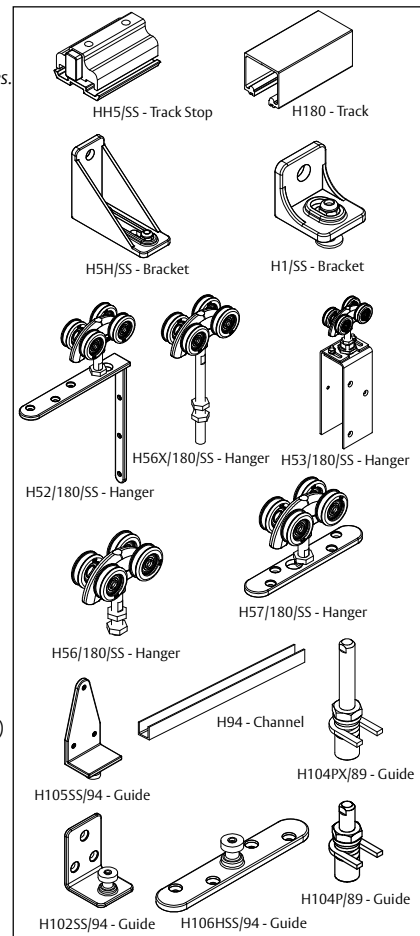



SSA ABLOY New Zealand Ltd. PO Box 100407, North Shore, Auckland 0745 • 6 Armstrong Road, Albany, Auckland 0632, New Zealand
Within New Zealand: Tel 09 415 8031 Fax 0800 478 297 www.assaabloy.co.nz • Outside New Zealand: Tel +64 9 921 7630 Fax +64 9 415 7222 www.assaabloy.co.nz