

## SWIFT

For top hung sliding doors. Max 30kg each.

### APPLICATION

- Ideal for residential interior top hung sliding doors
- Suitable for a single door or for two doors on a bi-parting installation - door width limits apply
- The track is sidewall fitted with provision for a 'hook-on' pelmet
- All screws are the same size and length for quick selection and easy installation

### DOOR SPECIFICATION

#### Track System **Swift**

For Individual Doors:

Max Door Weight	30kg
Max Door Width	1500mm
Min Door Thickness	25mm

Suitable for use with lightly constructed timber framed doors of flush or panelled construction. Provision must be made for fitting the hangers securely, since the hangers strike the door stops.

### STANDARD SETS AND PACK

Sets comprise of top track, 2x hangers, 2x door stops, H101N and H162 guides, all screws and installation instructions.


Set No.	Max door width	Hardware for	Track length
<b>HS16</b>	900mm	1 door	1600mm
<b>HS24</b>	1500mm	1 door	2440mm


#### Pack No.

**HS1** The S1 is a pack of fittings only, without track, for use with one S24 set for bi-parting doors, each 720mm maximum width.

### HARDWARE SPECIFICATION

<b>Track</b>	<b>H30A</b>	Aluminium (1600 & 2440mm lengths) Track includes recess for 'hook-on' pelmet.
<b>Hangers (2 per door)</b>	<b>H30HDP</b>	Steel hanger with nylon wheel
<b>Door Stop</b>	<b>H30DS</b>	Rubber buffered stop
<b>Guides</b>	<b>H101N</b> <b>H162</b>	Nylon saw cut guide Adjustable floor guide.
<b>Accessories</b>		
Pelmet and End Caps	<b>H30PEL</b>	Pelmet in pearl white on zinc coated steel. Hooks onto track, no screws required. Supplied with End Caps made from high impact polypropylene. The end caps are a push-fit onto the pelmet. Pelmet length: 1800mm.

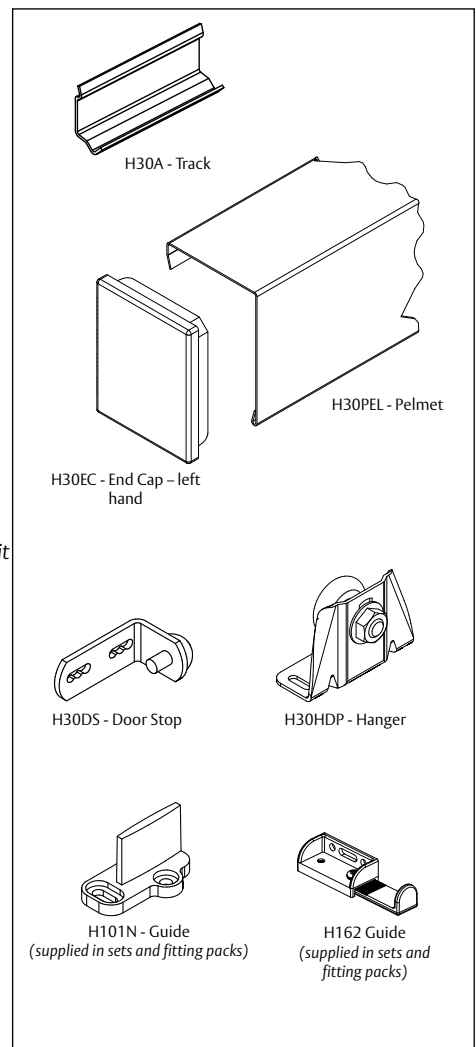

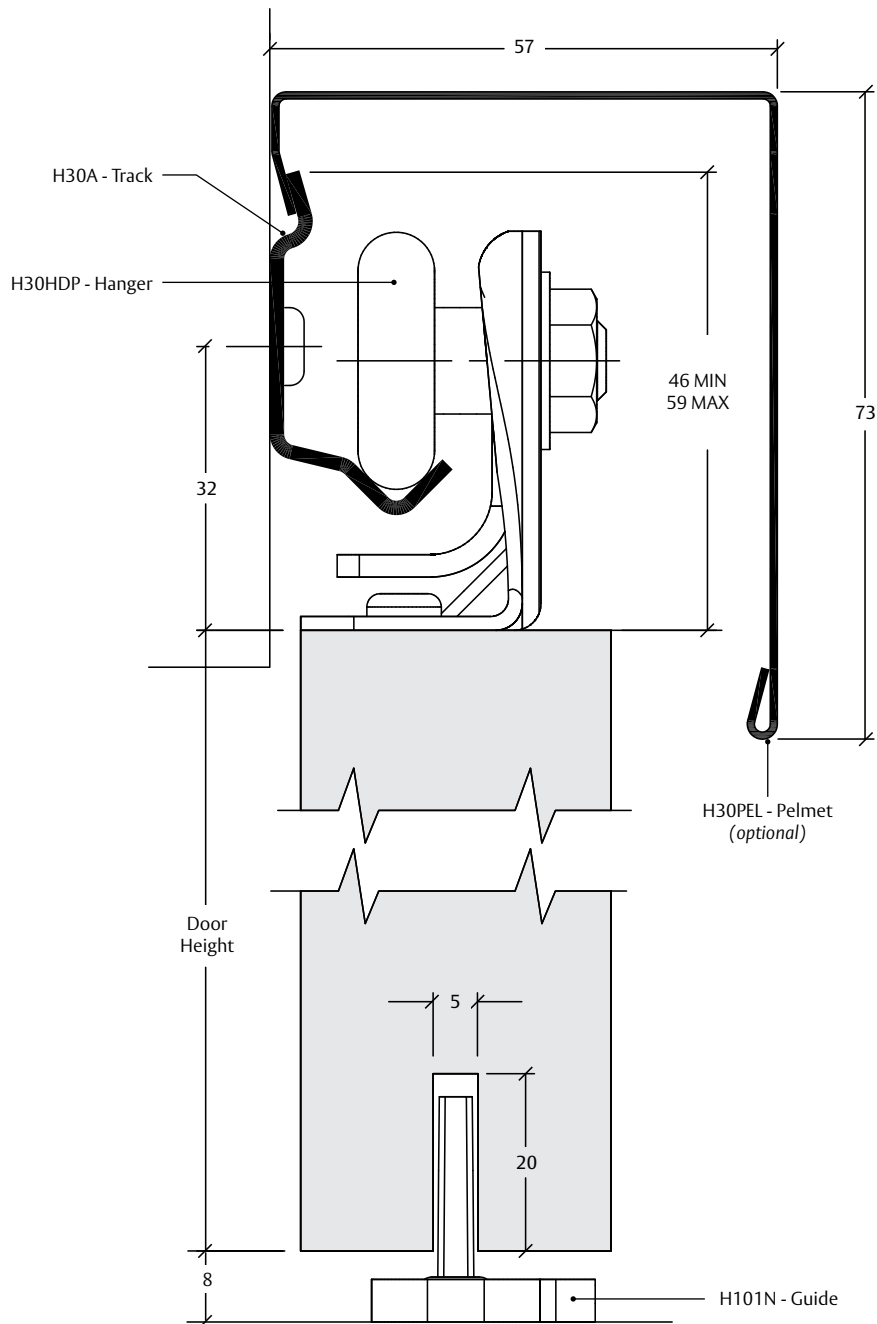

NOT TO SCALE

