


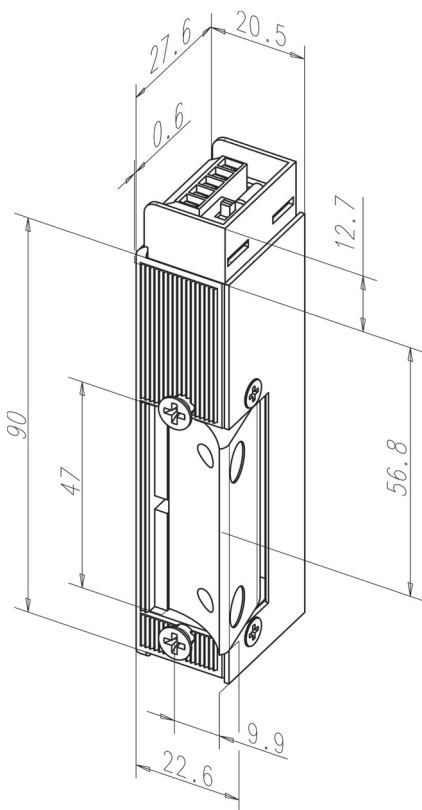

Product description

Electric strike for horizontal panic door locks. Suitable for the surface-mounted casing A06 "MultiFix"

Overview of Advantages

- Vertical and horizontal mounting possible
- Due to 180° fitting, can be used DIN right and left
- Three-dimensional adjustment
- 12/24 V changeover switch and suppressor diode

Scope of delivery

- 1 piece electric strike

Technical data

Handing	Universal
Adjustable electric strike (F, Fix®)	Yes
Diode (05)	Yes
Fail-locked	Yes
Three-dimensional adjustment (MultiFix®)	Yes
Rated resistance	57.5 Ohm
current consumption	130 mA
Current consumption DC (stabilised)	210 mA
Height	102,7 mm
Depth	28 mm
Latch material	Coated brass
Width	22,6 mm
Break-in resistance	3000 N
Operating temperature range	-15 °C to +40 °C
Installation position	Vertical and horizontal
Material housing	Zinc die-cast
DIN-direction	universal
Max. latch preload AC	50 N
Max. latch preload DC (stabilised)	10 N

Article number	14U400-----Q31
----------------	----------------