


## Electric Strike

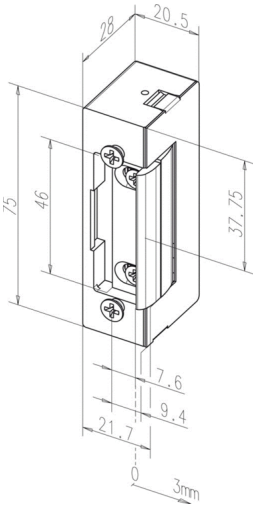

### E7-02135R11

ASSA ABLOY E7-02135R11 fail secure electric strike

#### Features

- Fail secure (locked when power go out)
- It is suitable for wooden and aluminium door with not many daily passes
- Normal operating voltage is 8-16 V DC / AC and it works noisy at AC voltage.
- Adjustable latch (max. 3mm)
- Due to 180° fitting, can be used DIN right and left
- Suitable for all access control systems with card

#### Technical Data

|                        |                              |
|------------------------|------------------------------|
| Break-in resistance    | 300 kg                       |
| Operating type         | Fail-secure                  |
| Height x Width x Depth | 75 mm x 20,5 mm x 28 mm      |
| Voltage                | 8-16 V DC/AC                 |
| Current Consumption    | 550 mA @12VDC ; 470mA@ 12VAC |
| Body                   | Zinc - aluminium alloy       |
| Latch                  | Zinc - aluminium alloy       |
| Faceplate              | Stainless steel              |
| Adjustable Latch Range | 3 mm                         |
| Monitoring             | No                           |

ASSA ABLOY Kilitleme Sistemleri San. ve Tic. Ltd. Şti.  
İkitelli Org.San.Bolg. İpkas San.Sit.  
3.Etap C Blok No:15 Basaksehir  
34490 İstanbul /Turkey

Tel : +90 212 503 41 00  
Fax : +90 212 552 52 55  
E-mail : proje@assaabloy.com

**ASSA ABLOY**  
Opening Solutions

Experience a safer  
and more open world