



Residential Sliding Hardware

For Sliding & Folding Doors

Design in motion

March 2013

HENDERSON



Henderson

Design in Motion

When it comes to the design and manufacture of sliding and folding door hardware systems, we're the global leader. For over 90 years, we've been creating the highest quality products backed by the same high standards of service, and now the Henderson name is synonymous with UK manufacturing expertise.

We're proud to remain based in Bowburn in County Durham, however we've expanded the business to Ireland, the Netherlands and China. We also operate one of the world's most advanced manufacturing facilities where we consistently achieve strict ISO 9001 quality standards, and our ISO 14001 accreditation demonstrates our commitment to our environmental responsibilities.

And with Investor in People status and membership of the prestigious ASSA ABLOY group of businesses, you can rest assured that our people, our products and our service are amongst the best in the world.

Why choose us?

What makes Henderson different is that we back up our commitment to high quality manufacturing with a range of world-class service solutions that are just as innovative as our products.

For example, our unique online **Expert Specification software** has been designed in-house by our research and development team to provide a rapid, no-obligation quote and a full specification for any sliding or folding door gear project. You can use Expert 24 hours a day at www.pchenderson.com/expert

What's more, our **Technical Sales Team** can offer professional and knowledgeable advice worldwide on virtually any aspect of our range, from selecting the right product through to installation, maintenance and spares.

Our product range

Our sliding and folding door hardware systems are perfect for saving space, maximising door opening widths, adjusting room sizes and increasing safety, and you'll find them in use right across the world.

Applications range from wardrobe doors and room dividers in homes, through to display panels and partitions in shops and other commercial environments, and finally to sliding gates and fire doors in large scale industrial and agricultural settings.

In addition, we also offer a huge range of accessories, kits and spare parts, which means we can make a real difference to virtually any opening or doorway.

Put simply, wherever a sliding door can work, we offer a solution.

The company is committed to quality and is registered to BS EN ISO 9001: 2000 Quality Systems and Environmental Management Systems ISO 14001: 1996.

As part of this commitment this brochure has been printed on carbon neutral paper in line with the FSC which promotes responsible management of the world's forests. This accreditation guarantees that only the amount of wood which the forest can regenerate naturally is cut down with minimal impact on the environment, wildlife and the indigenous people who reside there.





Choosing the right sliding door hardware for your home

Selecting the best system can be complicated. That's why we've created this useful guide to help you. Simply answer the following questions to find the right system for you. If you do need help and advice, please call our technical sales team.

1 How are your doors going to be used?

Sliding and folding doors can be used across a variety of applications including wardrobes, cupboards, cabinets and room dividers.

2 Are your doors sliding or folding?


Sliding systems are used with 1, 2 or 3 separate doors. Folding systems are used with 2 or 4 hinged doors.

3 How are your doors to be fixed?

There are two fixing methods; face fixed and soffit fixed.

Face fixed systems (A&B) are for sliding doors and the track is attached to the side of the wall facing the room. You will need the necessary wall space to park the door(s).

Soffit fixed systems are for either sliding or folding doors and the track is attached to the lintel. Track can be fitted within the opening width (C - sliding doors or F - folding doors) or extend into the wall cavity (D & E - sliding only).



4 What length of track do I need?

With the face fixing method, double the width of the opening to allow for the doors to be pulled back in front of the wall (A or B).

With the soffit fixing method, it is either the width of the opening (C or F) or double the width of the opening for the doors to go into the wall cavity (D or E).

5 What size doors do I need?

With the face fixing method, the width and height of the door need to be slightly bigger than the opening itself (to prevent gaps).

With the soffit fixing method, height - the width and height of the door need to be exactly the same of that of the opening.

The thickness of the door is depended on the selected system (see product pages for details).

6 What materials are your doors made from?

There are systems for solid wood, wood framed and metal framed doors within this brochure. For solid glass doors, please download the glass brochure from our website.

7 How heavy are your doors?

Establish the weight of each single door.

Using the answers from questions 1-7, use the System Specifier (opposite) to identify the best system for your needs and then place your order. To find your nearest stockist, call our sales team or visit www.pchenderson.com

SYSTEM SPECIFIER

NAME	DOOR TYPES					FIXING		MAX. DOOR WEIGHT	PAGE No.
	SLIDING			FOLDING		FACE	SOFFIT		
	WARDROBE & CUPBOARD (WOOD)	CUPBOARD (GLASS)	ROOM DIVIDER (WOOD)	WARDROBE & CUPBOARD (WOOD)	ROOM DIVIDER (WOOD)				
SLIPPER	■						Ⓒ Ⓓ or Ⓔ	9 Kg	6
BIFOLD				■			Ⓕ	14 Kg	7
CELLO	■							25 Kg	8
LORETTO	■							23 Kg	9
ZENITH		■						25 Kg	10
SENATOR			■			Ⓐ or Ⓑ	Ⓒ Ⓓ or Ⓔ	30 Kg	11
DOUBLE TOP	■						Ⓒ Ⓓ or Ⓔ	45 Kg	12
PHANTOM			■			Ⓐ or Ⓑ	Ⓒ Ⓓ or Ⓔ	45 Kg	13
SINGLE TOP	■					Ⓐ or Ⓑ	Ⓒ Ⓓ or Ⓔ	45 Kg	14
POCKET DOOR			■				Ⓓ or Ⓔ	60 Kg	15
MARATHON 55			■			Ⓐ or Ⓑ	Ⓒ Ⓓ or Ⓔ	55 Kg	16-17
MARATHON 90			■			Ⓐ or Ⓑ	Ⓒ Ⓓ or Ⓔ	90 Kg	16-17
HUSKY FOLDING 25				■	■		Ⓕ	25 Kg	18-19
HUSKY FOLDING 40				■	■		Ⓕ	40 Kg	18-19
HUSKY SLIDING 50	■		■			Ⓐ or Ⓑ	Ⓒ Ⓓ or Ⓔ	50 Kg	20-21
HUSKY SLIDING 100	■		■			Ⓐ or Ⓑ	Ⓒ Ⓓ or Ⓔ	100 Kg	20-21

SLIPPER

SLIDING


WOOD

9kg



Doors not supplied by P C Henderson

The Slipper is ideal for all types of fitted bathroom and kitchen furniture, such as serving hatches, cupboards and other items made from lightweight wood or chipboard. It supports a maximum door weight of 9kg, a maximum door width of 900mm and door thicknesses of between 16-30mm. Three kits are available giving a maximum opening width of 1800mm, and the unit can easily be top-fixed. The nylon slides and aluminium track combine quiet and effortless operation, attractive looks, and simple-to-remove doors for cleaning and decorating.

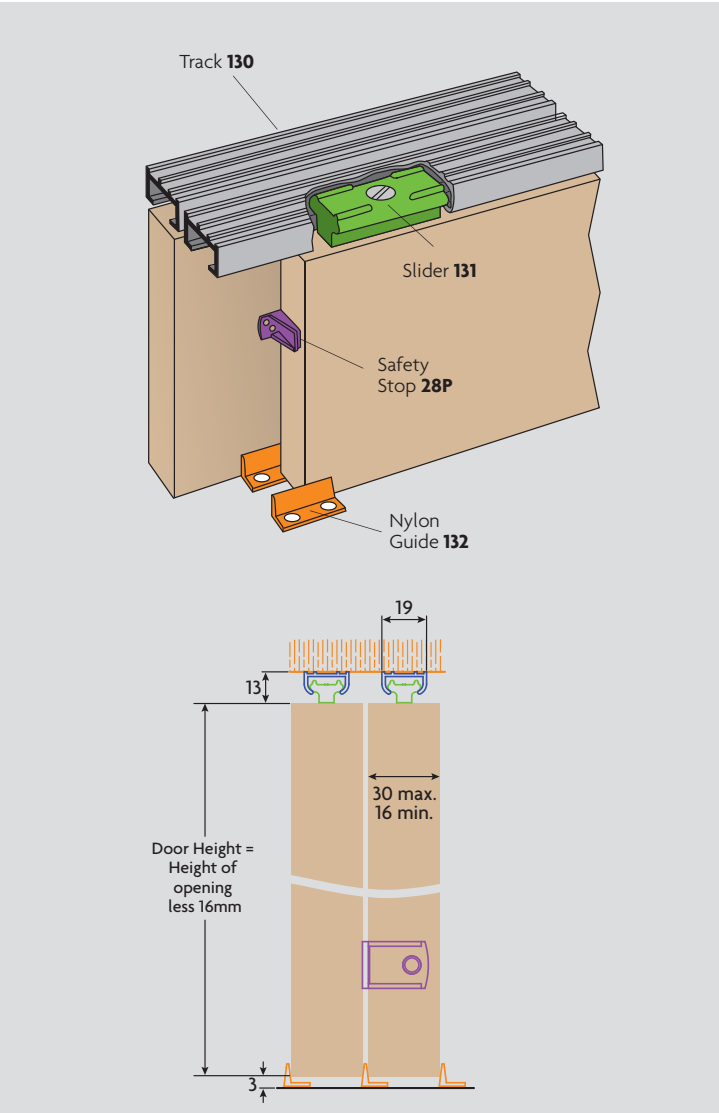

STANDARD DOOR KIT

For 2 Doors:

- Track x2 (130)
- Slider x4 (131)
- Stop x1 (28P)
- Flushpull x2 (26P)
- Guides x4 (132)

OPTIONAL EXTRAS

- 1 Door Fittings Kit Order Code: **SS1**



STANDARD KIT ORDER CODES					
Order Code	No. of Doors	Track Length	Maximum Door Size	Max Door Weight	Door System
SS4	2	1200mm	1800 x 900 x 30mm	9kg	■ — ■
SS5	2	1500mm	1800 x 900 x 30mm	9kg	■ — ■
SS6	2	1800mm	1800 x 900 x 30mm	9kg	■ — ■

BIFOLD

FOLDING

WOOD

14kg




Doors not supplied by P C Henderson

The Bifold range offers a stable, silent and smooth-opening folding systems for wardrobe doors that can complement any bedroom. Designed for timber, timber framed or composite doors, and also suitable for jambless openings, the Bifold can support a maximum leaf weight of 14kg and door thicknesses of between 20-35mm. A range of kits are available up to a maximum opening of 2134mm. Kits contain an aluminium top track with fittings and spring loaded guides which complete this low maintenance system.

STANDARD DOOR KIT


For 2 or 4 Doors:

- Track - x1 for 2 Doors, x2 for 4 Doors (**310**)
- Top Pivot Socket - x1 for 2 Doors, x2 for 4 Doors (**311**)
- Top Pivot - x1 for 2 Doors, x2 for 4 Doors (**313**)
- Guide - x1 for 2 Doors, x2 for 4 Doors (**315**)
- Hinge - x3 for 2 Doors, x6 for 4 Doors (**282S**)
- Adjustable Bottom Pivot Assembly - x1 for 2 Doors, x2 for 4 Doors (**289B**)

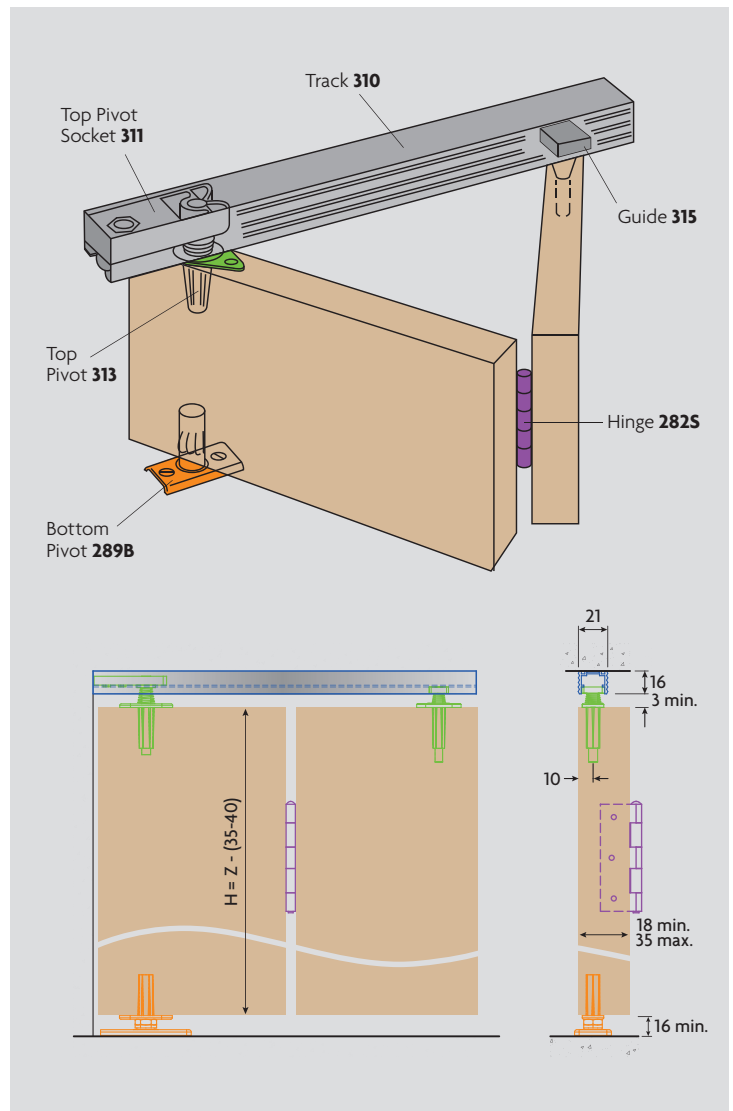**OPTIONAL EXTRAS**

- 2 Door Fittings Kit

Order Code: **BF2**

**STANDARD KIT ORDER CODES**

Order Code	No. of Doors	Track Length	Maximum Door Size	Max Door Weight	Door System
B10/2	2	1067mm	2400 x 530 x 35mm	14kg	■ ^
B15/4	4	1524mm	2400 x 530 x 35mm	14kg	■ ^ ^ ■
B20/4	4	2134mm	2400 x 530 x 35mm	14kg	■ ^ ^ ■

CELLO

SLIDING


WOOD

25kg



Doors not supplied by PCHenderson

The twin-slide Cello is perfect for timber, timber framed and composite doors, and can make a huge difference to virtually any cupboard or wardrobe. It can support doors up to 25kg in weight, 920mm wide, and between 16-40mm thick, and two and three door kits are available to create opening widths of up to 2400mm.

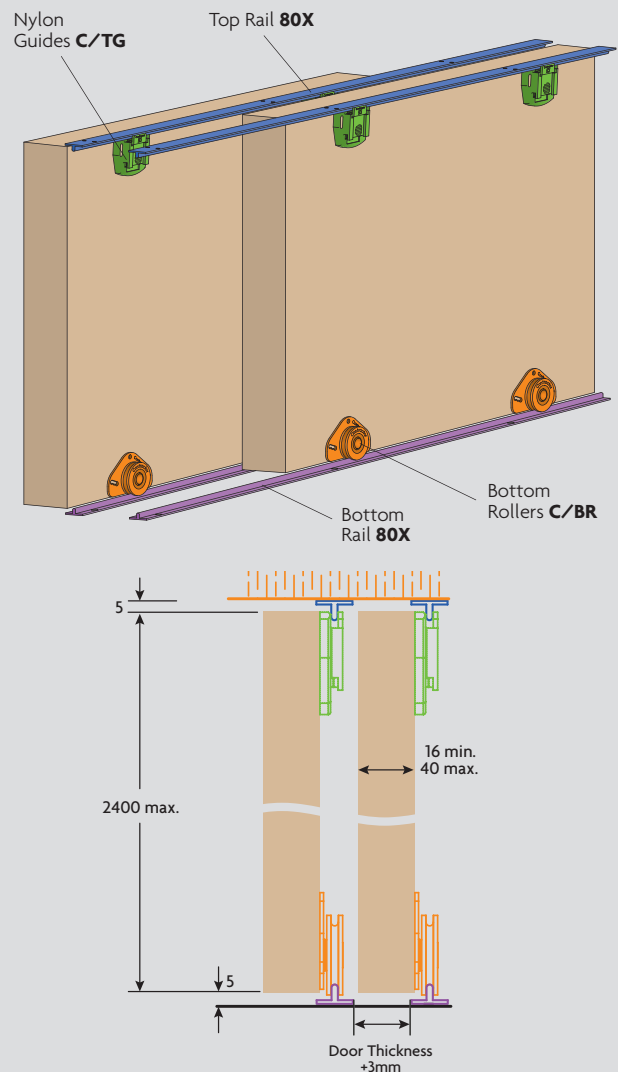**STANDARD DOOR KIT**

For 2 or 3 Doors:

- Top/Bottom Rail x4 (**80X**)
- Face-Fixed Nylon Guides - x4 for 2 Doors, x3 for 3 Doors (**C/TG**)
- Face-Fixed Nylon-Wheeled Bottom Rollers x4 for 2 Doors, x3 for 3 Doors (**C/BR**)

OPTIONAL EXTRAS

Order Code:

- 1 Door Fitting Pack
- Flushpull

C1
26P

**C1****26P****STANDARD KIT ORDER CODES**

Order Code	No. of Doors	Track Length	Maximum Door Size	Max Door Weight	Door System
C15	2	1500mm	2400 x 920 x 40mm	25kg	■ — ■
C18	2	1800mm	2400 x 920 x 40mm	25kg	■ — ■
C24	3	2400mm	2400 x 920 x 40mm	25kg	■ — ■

LORETTO

SLIDING



WOOD

23kg



Doors not supplied by P C Henderson

When it comes to finishing wardrobes, cupboards, bookcases and other pieces of high quality cabinet work, the Loretto range is ideal. It has been designed to work with timber framed, glazed and flush doors up to 23kg in weight, up to 900mm wide, and between 20-45mm thick. Three kits are available giving a maximum opening width of 1800mm and the nylon guides and rollers and aluminium rail ensure it works smoothly and quietly.

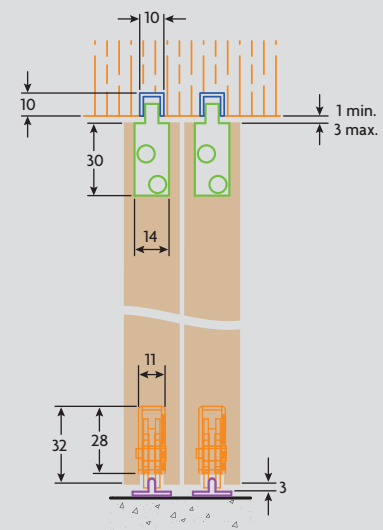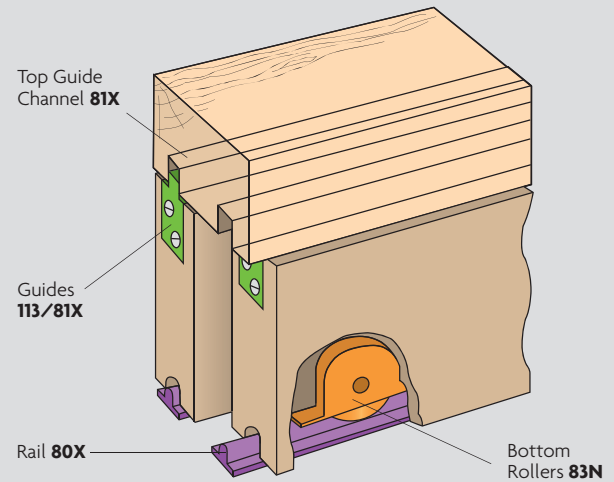**STANDARD DOOR KIT**

For 2 Doors:


- Top Guide Channel x2 (**81X**)
- Guides x4 (**113/81X**)
- Bottom Rollers x4 (**83N**)
- Rail x2 (**80X**)

OPTIONAL EXTRAS

- Face-Fix Rollers (2 per door)
- Flushpull

Order Code:

84N (pair)
26P

**84N****26P****STANDARD KIT ORDER CODES**

Order Code	No. of Doors	Track Length	Maximum Door Size	Max Door Weight	Door System
D4	2	1200mm	1800 x 900 x 45mm	23kg	■ — ■
D5	2	1500mm	1800 x 900 x 45mm	23kg	■ — ■
D6	2	1800mm	1800 x 900 x 45mm	23kg	■ — ■

ZENITH

SLIDING


GLASS

25kg



Doors not supplied by P C Henderson

The Zenith is the perfect partner for any showcase, bookcase, display panel, hatch, interior window or sliding glass door weighing up to 25kg and 6mm thick. Three kits are available giving a maximum opening width of 1800mm, and its precision-made, satin-anodised finish, aluminium gear and brush-pile strips ensure a silent and easy-gliding action.

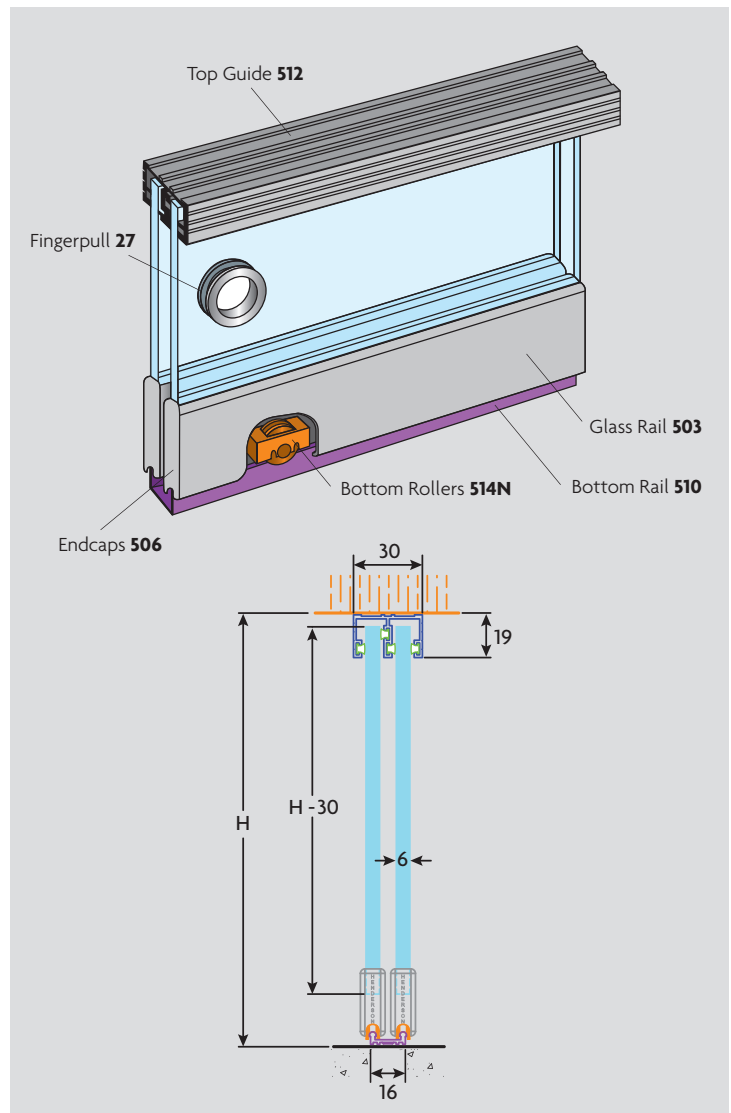**STANDARD DOOR KIT**

For 2 Doors:

- Top Guide x1 (512)
- Glass Rails x2 (503)
- Bottom Rollers x4 (514N)
- Endcaps x4 (506)
- Bottom Rail x1 (510)

OPTIONAL EXTRAS

- Fingerpull
- Cylinder Lock (L or R)

Order Code:

27
507LH or 507RH



27



507LH/507RH

STANDARD KIT ORDER CODES

Order Code	No. of Doors	Track Length	Maximum Door Size	Max Door Weight	Door System
Z12	2	1200mm	1800 x 916 x 6mm	25kg	■ — ■
Z15	2	1500mm	1800 x 916 x 6mm	25kg	■ — ■
Z18	2	1800mm	1800 x 916 x 6mm	25kg	■ — ■

SENATOR

SLIDING

WOOD

30kg




Doors not supplied by P C Henderson

The Senator brings an elegant silent sliding mechanism to heavier entrance doors and room dividing doors of up to 30kg. Designed for timber, timber framed and composite doors, it can support doors up to 900mm wide and between 20-35mm thick. Nylon guides and hangers on an aluminium track and useful fixed floor guides complete this premium package.

STANDARD DOOR KIT

For Single Doors:

- Jump-Proof, Face/Soffit Aluminium Track x1 (**21A**)
- Nylon-Tyred, Adjustable Top Fixing Hangers x2 (**161**)
- Nylon Guide x1 (**162**) ■ Stop x1 (**28P**)

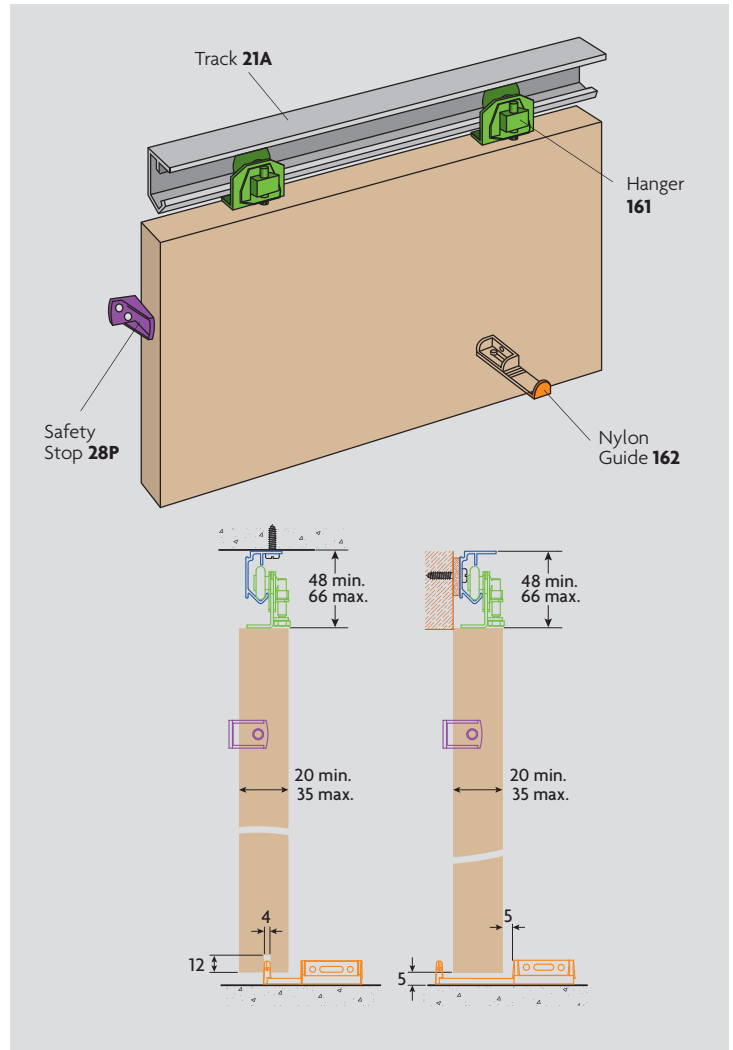

OPTIONAL EXTRAS

- Pelmet (1854mm)
- Pelmet Endcap
- Flushpull
- Flushbolt
- Lock
- Door Edge Sponge Strip

Order Code:

40P

EC40P

400

333

295

537



40P



EC40P



400



333



295



537

STANDARD KIT ORDER CODES

Order Code	No. of Doors	Track Length	Maximum Door Size	Max Door Weight	Door System
SEN	1	1500mm	2400 x 900 x 35mm	30kg	

DOUBLE TOP

SLIDING


WOOD

45kg



Doors not supplied by P C Henderson

For heavy duty sliding door applications such as larger wardrobes and cupboards in hotels, schools, hospitals and offices, the Double Top is the ideal choice. Designed to support double track sliding timber, timber framed and composite doors of up to 45kg and 16-40mm in thickness, it works silently on nylon hangers and an aluminium track. Door heights can be adjusted easily, a floor guide can be added as an option, and a triple door kit can support openings of up to 2400mm.

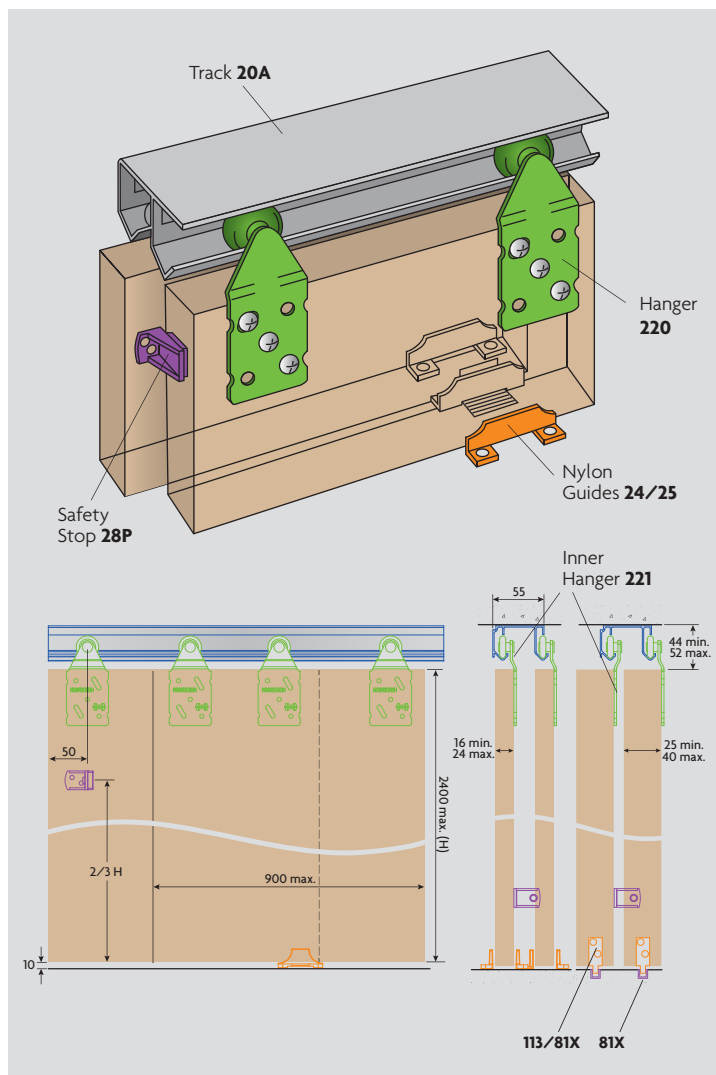

STANDARD DOOR KIT

For 2 or 3 Doors:

- Anti-Rise Soffit Fixing Aluminium Section Track x1 (**20A**)
- Outer Offset Hangers x2 (**220**)
- Inner Offset Hangers x2 (**221**)
- Reversible Hangers x2 - 3 Door Only (**222**)
- Rubber-Buffered Stop - x1 for 2 Doors, x2 for 3 Doors (**28P**)
- Nylon Guides - x1 for 2 Doors, x2 for 3 Doors (**24/25**)

OPTIONAL EXTRAS

- 1 Door Fitting Pack
- 2 Door Fitting Pack
- Guide (2 per door)
- Guide Channel
- Flushpull
- Reversible Hangers
- Aluminium Fascia (for doors up to 18mm thick)
- Aluminium Fascia (for doors up to 30mm thick)

Order Code:

W01**W02****113/81X****81X****400****222****F138****F134**

STANDARD KIT ORDER CODES

Order Code	No. of Doors	Track Length	Maximum Door Size	Max Door Weight	Door System
W12	2	1200mm	2400 x 900 x 40mm	45kg	■ — ■
W15	2	1500mm	2400 x 900 x 40mm	45kg	■ — ■
W18	2	1800mm	2400 x 900 x 40mm	45kg	■ — ■
W24	3	2400mm	2400 x 900 x 40mm	45kg	■ — ■


PHANTOM

SLIDING WOOD 45kg



Doors not supplied by P C Henderson

If a silent sliding mechanism is a priority, the Phantom really delivers. Made for doors of up to 45kg, between 610-915mm wide and 30-50mm thick, it can effortlessly divide virtually any room in a residential, hospital or hotel environment. With fittings for timber, timber framed and composite doors, the Phantom is ultra-quiet, frictionless and easy to operate, and provides a unique simultaneous opening action.

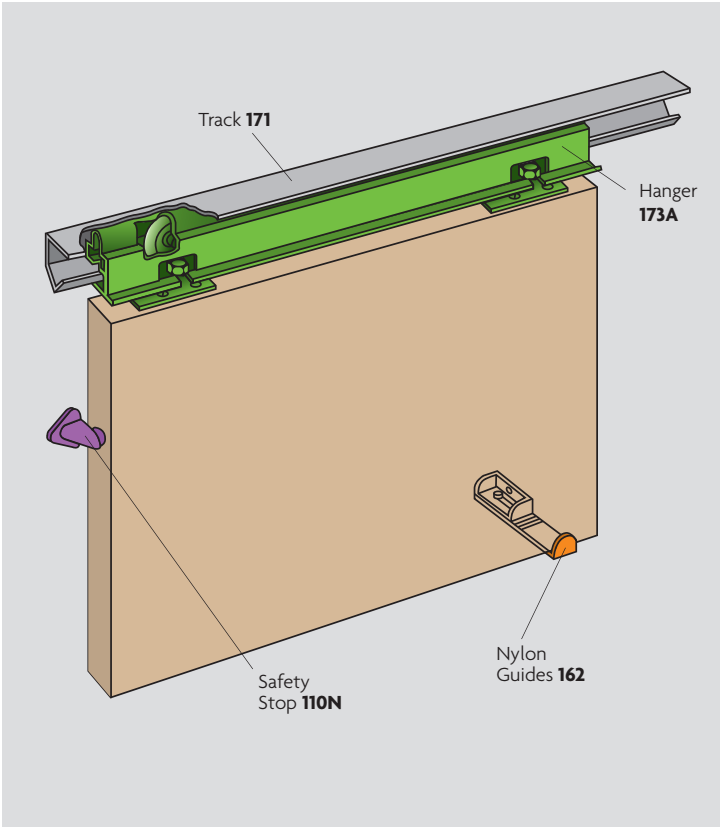

STANDARD DOOR KIT

For Single Doors:


- Track x1 (171)
- Guide x1 (162)
- Hanger x1 (173A)
- Stop x1 (110N)

OPTIONAL EXTRAS

- Simultaneous Action Unit
- Pelmet (1854mm)
- Pelmet Endcap
- Flushpull
- Flushbolt
- Lock
- Door Edge Sponge Strip (10m)
- Self-Closing System Pulley Assembly (doors up to 45kg)

Order Code:

23
40P
EC40P
400
333
295
537



STANDARD KIT ORDER CODES

Order Code	No. of Doors	Track Length	Maximum Door Size	Max Door Weight	Door System
P9	1	1525mm	2400 x 915 x 50mm	45kg	

SINGLE TOP

SLIDING

WOOD

45kg




Doors not supplied by P.C. Henderson

With the Single Top, wardrobe doors have never been more graceful. The system works with single track, timber framed or composite wardrobe doors of up to 45kg and between 16-40mm, and three kits are available suitable for a maximum width of 900mm.

STANDARD DOOR KIT

For Single Doors:

- Anti-Rise, Face/Soffit Aluminium Track x1 (**21A**)
- Nylon-Tyred, Face-Fixing Hangers x2 (**220**)
- Rubber-Buffered Stop x1 (**28P**)
- Nylon Guide x1 (**24/24**)

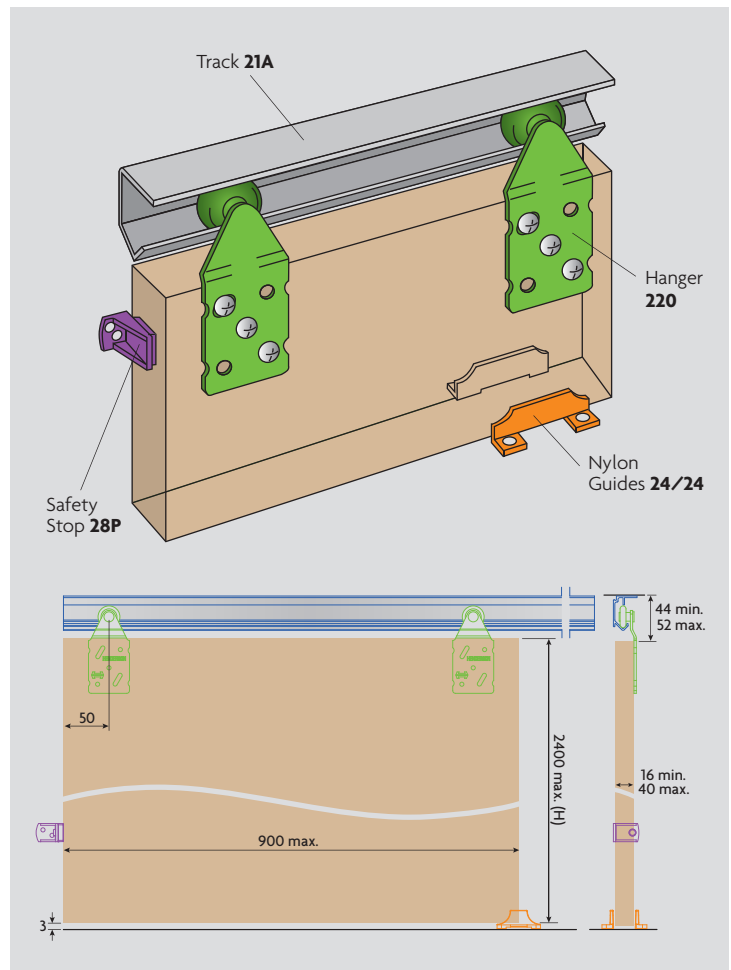

OPTIONAL EXTRAS

- 1 Door Fitting Pack
- Guide (2 per door)
- Guide Channel
- Flushpull
- Lock
- Door Edge Sponge Strip

Order Code:

ST01
113/81X
81X
400
295
537



ST01



113/81X



81X



295



537

STANDARD KIT ORDER CODES

Order Code	No. of Doors	Track Length	Maximum Door Size	Max Door Weight	Door System
ST12	1	1200mm	2400 x 900 x 40mm	45kg	
ST15	1	1500mm	2400 x 900 x 40mm	45kg	
ST18	1	1800mm	2400 x 900 x 40mm	45kg	

POCKET DOOR

SLIDING

WOOD

60kg




Doors not supplied by P.C. Henderson

The Pocket Door kit is a unique sliding door solution that works with cavity walls, and which offers amazing benefits where interior space is limited such as in toilets, bathrooms and kitchens. Each Pocket Door kit comes with a pre-assembled aluminium track and header mechanism.

STANDARD DOOR KIT

For Single Doors:

- Track x1 (**280A**)
- Husky 100 Hanger x2 (**284**)
- Galvanised Steel Wrapped Softwood Studs x4
- Galvanised Steel Stud Spacing Brackets x2
- Galvanised Steel Stud Support Brackets x2
- Softwood Header Assembly (with pre-fitted track) x1
- Clip Stop with Adjustable Retention x2 (**601H**)
- Rubber Buffer x1 (**287**)
- Flushpulls - contains all handles and pulls needed (**385SA**)

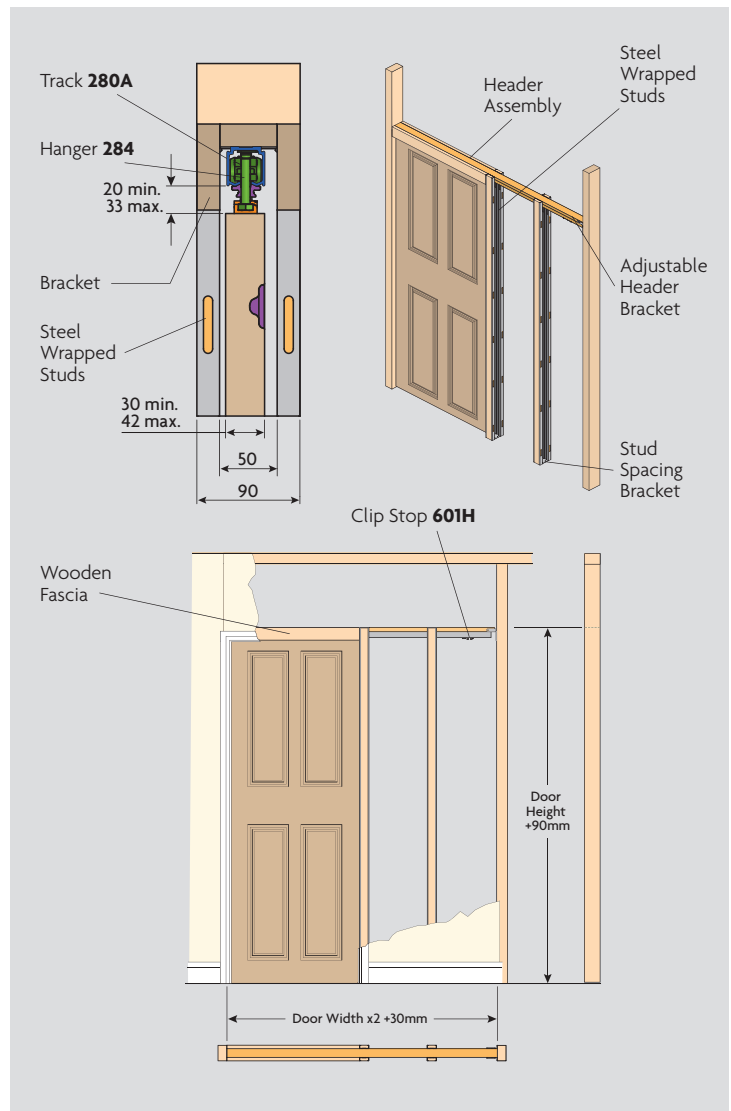

OPTIONAL EXTRAS

- Flushpull
- Fingerpull
- Lockset (30-38mm doors)
- Lockset (40-48mm doors)

Order Code:

400 or 400PSS
or **385PB or 385SA**
380SA or 380PB
390SA or 390PB
395SA or 395PB



STANDARD KIT ORDER CODES

Order Code	No. of Doors	Maximum Door Size	Max Door Weight	Door System
PDK3	1	1981 x 762 x 44mm	60kg	
PDK4	1	1981 x 838 x 44mm	60kg	
PDK5	1	2040 x 762 x 44mm	60kg	
PDK6	1	2040 x 826 x 44mm	60kg	
PDK7	1	2040 x 726 x 44mm	60kg	
PDK10	1	2315 x 930 x 44mm	60kg	

MARATHON 55 & 90

SLIDING

WOOD

METAL

55kg
90kg

When it comes to heavy duty or light commercial sliding doors and partitions, the Marathon is in a class of its own. Designed for timber, timber framed and composite doors, it offers a unique simultaneous opening action, easily adjusted door heights and a fire door kit option for the Marathon 90, and it can also be used externally with weather protection.

Available as the Marathon 90 for doors of up to 90kg and the Marathon 55 for doors of up to 55kg, it can handle door thicknesses of between 32-50mm and doors up to 2500mm wide.

STANDARD KIT ORDER CODES



Product	Order Code	No. of Doors	Track Length	Opening Width Range	Max Door Weight	Door System
Marathon 55	J2	1	1219mm	400 - 750mm	55kg	
	J3	1	1473mm	750 - 900mm	55kg	
	J4	1	1702mm	900 - 1050mm	55kg	
	J5	1	1981mm	1050 - 1200mm	55kg	
	J6*	1	2438mm	1200 - 1500mm	55kg	
Marathon 90	S2	1	1219mm	400 - 750mm	90kg	
	S3	1	1473mm	750 - 900mm	90kg	
	S4	1	1702mm	900 - 1050mm	90kg	
	S5	1	1981mm	1050 - 1200mm	90kg	
	S6*	1	2438mm	1200 - 1500mm	90kg	
	S7*	1	3048mm	1500 - 1800mm	90kg	
	S8*	1	3226mm	1800 - 2000mm	90kg	
	S9*	1	4420mm	2000 - 2500mm	90kg	

MARATHON 55 & 90

SLIDING

WOOD

METAL

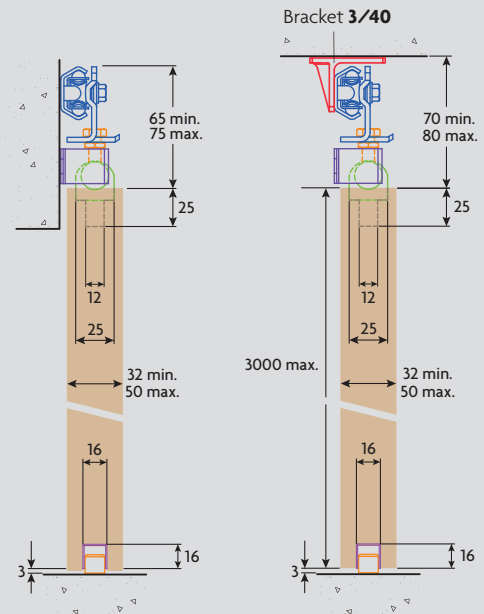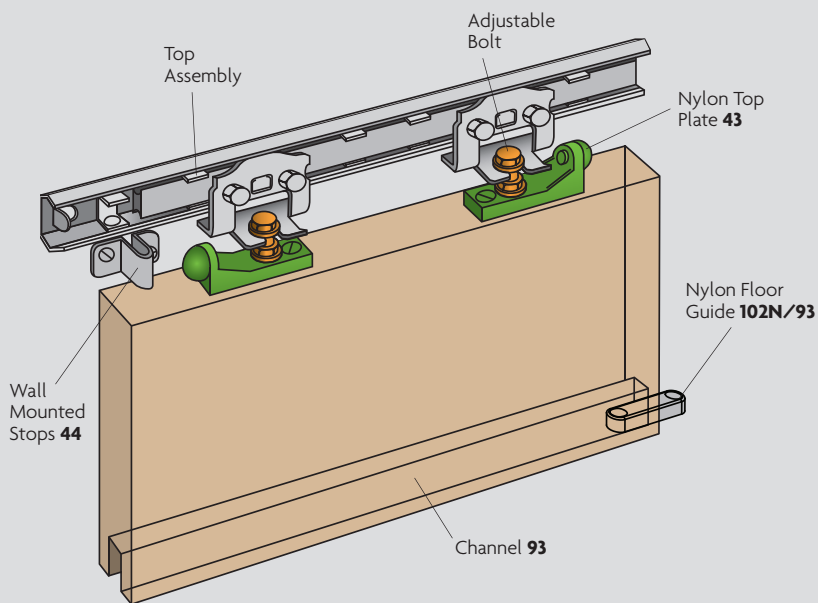55kg
90kg

STANDARD DOOR KIT

For Marathon 55:

- Top Assembly x1
- Nylon Top Plates x2 (43)
- Wall Mounted Stops x2 (44)
- Nylon Floor Guide x1* (102N/93)
- Guide Channel x1 (93)

For Marathon 90:

- Top Assembly x1
- Nylon Top Plates x2 (43)
- Wall Mounted Stops x2 (44)
- Nylon Floor Guide x1* (102N/93)
- Guide Channel x1 (93)

* 2 Guides are supplied in the J6, S6, S7, S8 and S9 kits.

OPTIONAL EXTRAS

Order Code


Upgrade your installation with your choice of the following high quality accessories.

- | | |
|--|------------------|
| ■ Soffit Brackets x5 | 3/40 |
| ■ Self-Closing System Pulley Assembly (doors up to 60kg) | SCK1 |
| ■ Biparting Unit (2 doors each max 900mm) | 23 |
| ■ Pelmet | 40P/1854 |
| ■ Pelmet End Cap | EC40P |
| ■ Fire Door Kit | FDK1/FDK2 |

Handles & Locks

Those little extras that can make a big difference. Choose from a variety of premium handle and lock upgrades.

- | | |
|-------------|------------|
| ■ Flushpull | 400 |
| ■ Flushbolt | 333 |
| ■ Lock | 295 |



HUSKY FOLDING 25 & 40


FOLDING

WOOD

METAL

25kg
40kg

Doors not supplied by P.C. Henderson

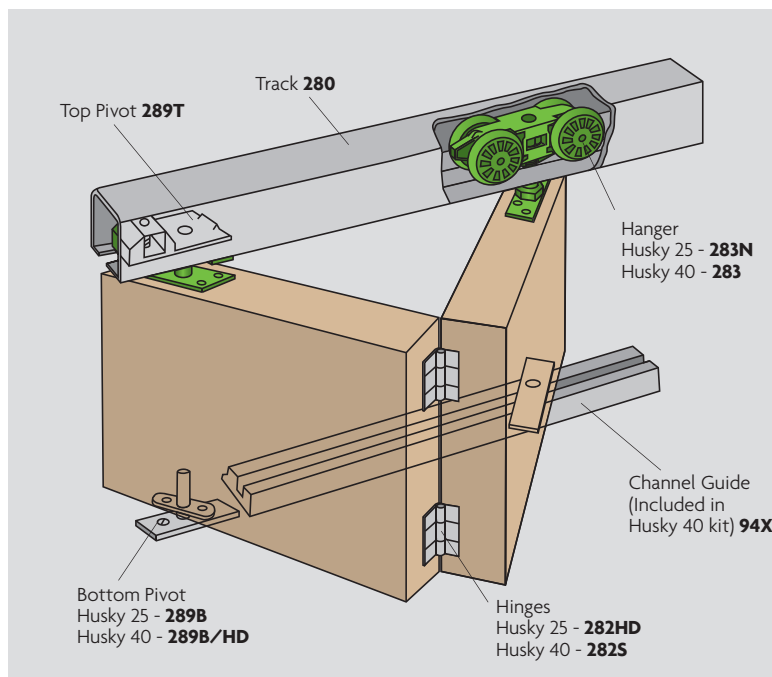

The Husky Folding door system provides a simple and flexible solution for both light and medium weight residential folding partitions. Designed for timber, timber framed and composite doors, its concealed fixings and robust floor gear allow the partitions to be neatly stacked at one or both sides. The Husky Folding 25 can support doors of up to 25kg and 600mm wide without a floor channel, and the Husky Folding 40 can support doors of up to 40kg and 762mm wide, with a floor channel guide included.

STANDARD DOOR KIT*

For 2 or 4 Doors, Husky Folding 25:

- Steel Track x1 (**280**)
- Top and Bottom Pivots for Fixing into End Panel x1 (**289T & 289B**)
- 4 Wheeled Adjustable Nylon Hangers - x1 for 2 Doors, x2 for 4 Doors (**283N**)
- Hinges - x3 for 2 Doors, x9 for 4 Doors (**282HD**)

For 2 or 4 Doors, Husky Folding 40:

- Steel Track x1 (**280**)
- Top Pivots for Fixing into End Panel x1 (**289T**)
- Bottom Pivots for Fixing into End Panel x1 (**289B/HD**)
- Channel Guide x1 (**94X**)
- Needle Roller Bearing Hangers for Top Plate - x1 for 2 Doors, x2 for 4 Doors (**283**)
- Roller Guide - x1 for 2 Doors, x2 for 4 Doors (**106H/HF/94**)
- Hinges - x3 for 2 Doors, x9 for 4 Doors (**282S**)

NB. Extra Pivots required for 4 doors folding (2 + 2).


* 2 and 4 door fitting packs contain all the components contained in the kits except the track/channel. Order also Steel Track (280) or Aluminium Section Track (280A).

HUSKY FOLDING 25 & 40

FOLDING

WOOD

METAL

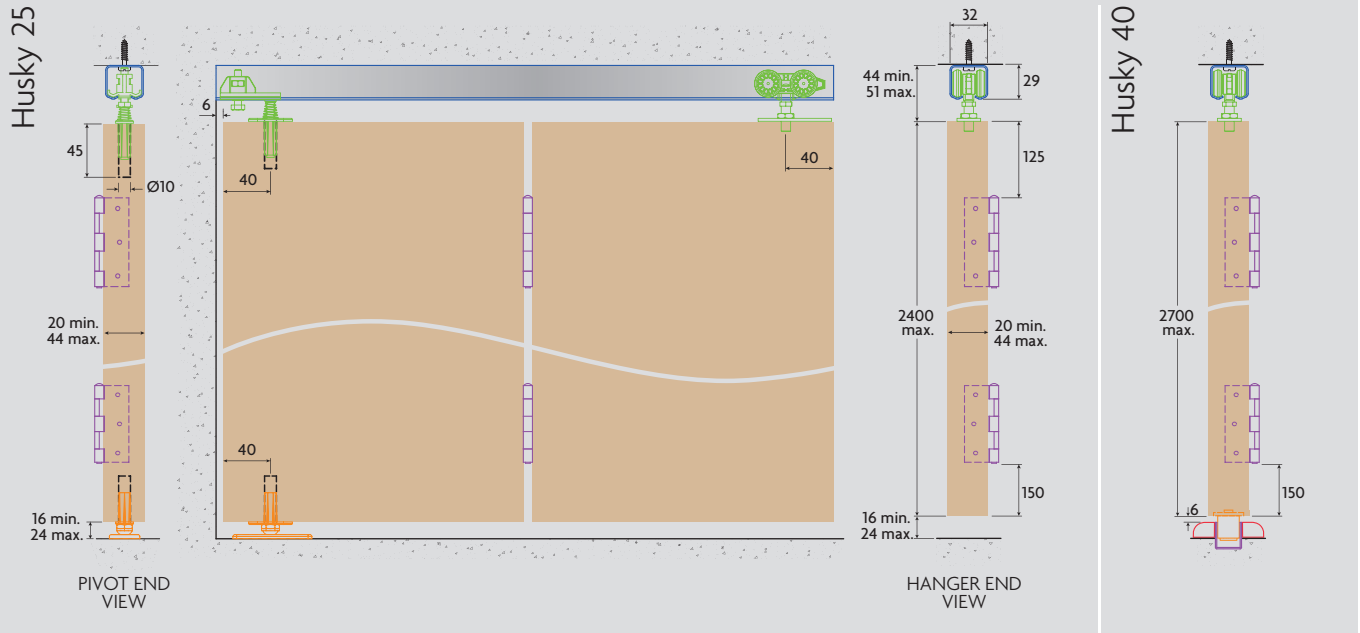25kg
40kg

OPTIONAL EXTRAS

Upgrade your installation with your choice of the following high quality accessories.

- Guide
- 2 Door Fittings Pack
- 4 Door Fittings Pack

Order Code

106HF/94
HF2/40
HF4/40




Handles & Locks

Those little extras that can make a big difference. Choose from a variety of premium handle and lock upgrades.

- Flushpull
- Flushbolt

400
333



STANDARD KIT ORDER CODES

Product	Order Code	No. of Doors	Track Length	Max Door Size	Max Door Weight	Door System
Husky 25	HF25/12	2	1200mm	2400 x 600 x 44mm	25kg	■ ^
	HF25/24	4	2400mm	2400 x 600 x 44mm	25kg	■ ^ ^
Husky 40	HF40/15	2	1500mm	2700 x 762 x 44mm	40kg	■ ^
	HF40/30	4	3000mm	2700 x 762 x 44mm	40kg	■ ^ ^

HUSKY SLIDING 50 & 100


SLIDING

WOOD

METAL

50kg
100kg

Doors not supplied by P.C. Henderson

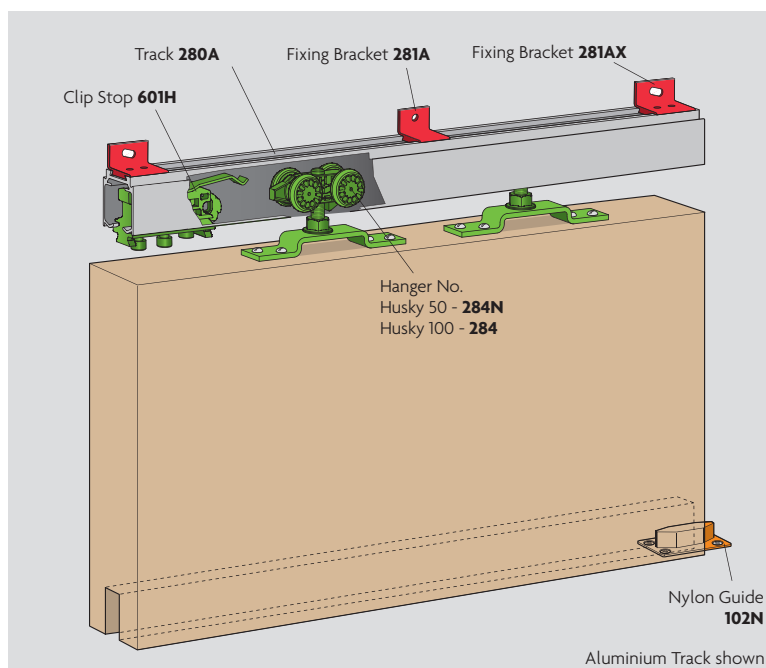

Versatile and silent, the Husky Sliding door system is ideal for creating wardrobe doors and room dividers with one or more timber, timber framed, composite or metal doors at each side. The Husky 50 and Husky 100 support doors of up to 50kg and 100kg respectively, and optional fitting kits allow additional doors to be fitted to a maximum door width of 1250mm. Kits contain galvanised steel or aluminium tracks, nylon rollers and precision floor guides complete this high quality, low maintenance system.



For information on Automated Door Hardware or Glass systems please see our Evolve and Husky Glass product brochures.

STANDARD DOOR KIT

For Single Doors:

- Track - Aluminium or Steel (**280A** or **280**)*
- Fixing Brackets - Aluminium or Steel (**281A** or **281**)
- 2 Nylon Bodied Hangers (**284** or **284N**)
- Nylon Guide (**102N**)
- Clip Stop (**601H**)
- Track Stop (**287**)

* Anodised Aluminium Track (**280AN**) also available.

NB. Extra fittings required for more than one door.

For metal doors **285** or **285N** is required.

STANDARD KIT ORDER CODES

Product	Order Code Steel Track	Order Code Aluminium Track*	No. of Doors	Track Length	Maximum Door Size	Maximum Door Weight	Door System
Husky 50	H50/15	H50/15A	1	1500mm	2700 x 800 x 40mm	50kg	
	H50/18	H50/18A	1	1800mm	2700 x 950 x 40mm	50kg	
	H50/20	H50/20A	1	2000mm	2700 x 1050 x 40mm	50kg	
	H50/24	H50/24A	1	2400mm	2700 x 1250 x 40mm	50kg	
Husky 100	H100/15	H100/15A	1	1500mm	2700 x 800 x 40mm	100kg	
	H100/18	H100/18A	1	1800mm	2700 x 950 x 40mm	100kg	
	H100/20	H100/20A	1	2000mm	2700 x 1050 x 40mm	100kg	
	H100/24	H100/24A	1	2400mm	2700 x 1250 x 40mm	100kg	

HUSKY SLIDING 50 & 100


SLIDING

WOOD


METAL

50kg
100kg

Aluminium Track

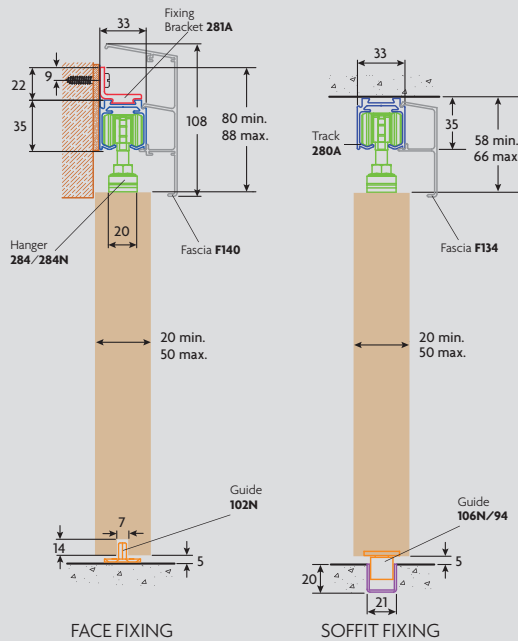

Steel Track

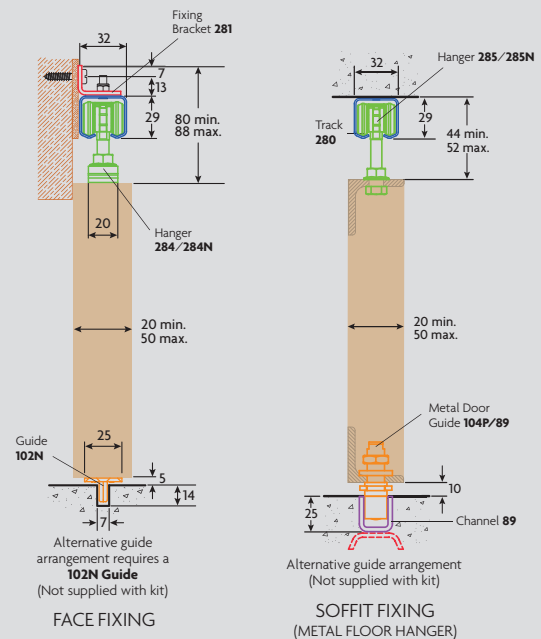

OPTIONAL EXTRAS

Upgrade your installation with your choice of the following high quality accessories.

Soft Stop Pack (Only for use with Husky 100)

A hydraulic damper will catch the sliding doors and gently pull them into their final position. For use with new installations or can be retro-fitted to an existing system. Not compatible with the Simultaneous Action or Low Headroom Packs.

- Minimum door width 726mm, maximum weight 50kg **SOFT50**
- Minimum door width 1020mm, maximum weight 50kg **SOFT50D***
- Minimum door width 716mm, maximum weight 100kg **SOFT100**
- Minimum door width 1078mm, maximum weight 100kg **SOFT100x2***

* For double damper installation, where soft stop action is on both the open and closed side.

Low Headroom Pack

Creates a modern, minimalistic finish with all parts concealed. It reduces the clearance between the track and door and maximises the door height.

- Door thickness 34-50mm, maximum door weight 100kg **LH100**

Simultaneous Action Pack

A great addition for internal bi-parting doors. Pull one door and the other one will open/close simultaneously.

- For use with Husky 100 **SIM100**

Additional Fittings Pack

To enable a second door to be fitted to the Husky System.

- For Husky 50 **H50N**
- For Husky 100 **H100**

Fascia for Aluminium Track

A range of aluminium fascias to enhance a variety of applications. Available in 1.5m, 1.8m, 2m, 2.5m and 3m lengths.

- Aluminium fascia for soffit-fixed applications for doors up to 50mm thick **F134**
- Aluminium fascia for soffit-fixed applications for doors up to 25mm thick **F138**
- Aluminium fascia for face-fixed applications up to 50mm thick (includes end caps) **F140**

Anodised Aluminium Track

The enhanced appearance of anodised aluminium will add extra sophistication to any installation.

- Lengths available: 1.5m, 1.8m, 2m, 2.5m, 3m, 4m, 5m & 6m **280AN**

Alternative Guiding System

Upgrade from nylon to a roller guiding system for an even smoother, longer lasting operation.

- Aluminium guide channel **94X**
- Roller guide for timber doors **106N/94**
- Roller guide for metal doors **104P/89**

Handles & Locks

Those little extras that can make a big difference. Choose from a variety of premium handle and lock upgrades.

- Satin Anodised SA flushpull **400**
- Stainless Steel SS flushpull 100x48 **400SS**
- Polished Stainless Steel PSS flushpull 100x48 **400PSS**
- Satin Anodised flushbolt **333**
- Mortice sliding door lock **395**



F134



280AN



395



400



LH100

HENDERSON

P C Henderson Limited

Durham Road, Bowburn,
County Durham DH6 5NG, UK
www.pchenderson.com

UK Technical Customer Services Team

Telephone: 0191 377 7345
Fax: 0191 377 3116
e-mail: sales@pchenderson.com

Export Department

Telephone: +44 (0) 191 377 7346
Fax: +44 (0) 191 377 0755
e-mail: international@pchenderson.com

P C Henderson (Ireland) Limited

Westlink Industrial Estate, Kylemore Road,
Dublin 10, Ireland
Telephone: +353 (0) 1 643 6816
Fax: +353 (0) 1 626 0455
e-mail: sales@pchenderson.ie

Henderson Nederland BV

Postbus 258, 5530 AG Bladel, Holland
Tel: +31 (0) 497 33 2020
Fax: +31 (0) 497 33 2029
e-mail: sales@henderson.nl
www.henderson.nl



@PCHendersonLtd

Residential

March 2013



Certificate Number 10845
ISO 9001
ISO 14001

