



Application

The ASSA ABLOY Privacy Door Kit has been developed in response to increasing demands from architects, designers and commercial end users (Shopping Centres, Universities etc) for a simple to operate and easy to understand system to lock and notify the status of automatic doors. More and more in commercial buildings, accessible toilets, standard toilets, shower rooms, and parent's rooms are being provided with automatic doors, both swinging and sliding.

Design

The Kit has been designed to be both user friendly and adaptable to most environments. The switch plates have been designed to be in accordance with Building codes Australia and NCC Access for people with a disability

Safety

In the event of an emergency such as the user losing consciousness or becoming incapacitated in some way, Staff can easily open the door via the Staff override function or via an optional outside override key.

Function

Easy interface with Automatic Sliding and Swing door operators.
Staff override function for use in an emergency.
Adjustable time out function.
Warning function prior to timer elapsing.
Duress alarm input and output.

Switch plates


Included on the internal and external switch plates are solid domes style pushbuttons and RED and GREEN indicators showing door status.
Internal Plate: (230 mm H x 200 mm W)
External Plate: (180 mm H x 200 mm W)



External Switch / Braille Plate



Internal Switch / Braille Plate

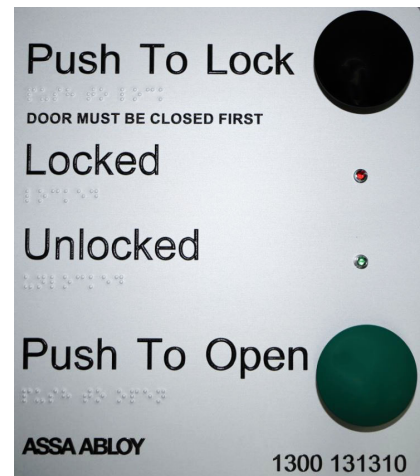

Typical Cycle

1. Room is vacant, door is closed and unlocked, external "Vacant" LED is on.
2. User presses the external Push To Open button. The door opens, the user enters the room and the door closes.

The length of time that the door stays open for the user to enter is programmable and adjustable.
3. Now once inside the room and the door is closed, the User presses the "Push To Lock" button. The door locks, the external "Occupied" and internal "Locked" LED's illuminate and the external "Push To Open" button is disabled.
4. To exit the room the user presses the "Push To Open" button. The door unlocks and opens, Vacant and Unlocked LED's are illuminated. Ready for the next person to use.

Compatible Operators

The ASSA ABLOY Privacy Door Kit can be combined with any of the following automatic door operators:

ASSA ABLOY SL500
ASSA ABLOY Unislide
ASSA ABLOY SW100 Swing
ASSA ABLOY SW200i Swing
ASSA ABLOY SW300 Swing



To comply with Australian and New Zealand Standards AS5007 – 2007, This equipment should be installed, regularly inspected, maintained and serviced by trained and authorized personnel. Preventive maintenance plans are highly recommended for a proper and safe operation. Talk to your ASSA ABLOY Entrance Systems representative to learn more about our service offering!