

PACER GLASS

For top hung glass sliding doors weighing 130 and 180kg each leaf

APPLICATION

- Ideal solution for commercial glass applications such as office doors and glass partitions
- Quiet operation, aluminium track with nylon rollers
- Glass clamp eliminates the need for holes in glass
- Suitable for both toughened and laminated glass

DOOR SPECIFICATION

Track System	130kg	180kg	Glass Weight
For Individual Door Leaves:			Value is approximate based on
Max Door Weight	130kg	180kg	8mm glass panel = 20kg/m ²
Max Door Width	3000mm	3000mm	10mm glass panel = 25kg/m ²
Glass Thickness	8-10-12mm	8-10-12mm	12mm glass panel = 30kg/m ²
Max Panel Height	3000mm	3000mm	

HARDWARE SPECIFICATION

Track	H600A	Aluminium (2000, 3000, 4000 & 6000mm lengths)
	H600AN	Aluminium anodized (2000, 3000, 4000 & 6000mm lengths)
Fixed Glass Panel Profile	HF600FPB	Aluminium bracket to allow glass side light to be fitted
Brackets	H1B	Face fix aluminium
	H1BX	Face fix jointing bracket


Glass Clamp Kits


Kits of 2x 56 hangers, 2x glass clamps, 2x 601P clip stops and an adjustable guide

130kg	180kg
H8/PA/130 130kg 8mm glass	H8/PA/180 180kg 8mm glass
H10/PA/130 130kg 10mm glass	H8/PA/180 180kg 8mm glass
H12/PA/130 130kg 12mm glass	H8/PA/180 180kg 8mm glass
Guides H8-12/SN	Brushed stainless steel adjustable floor guide for 8-10-12mm glass
Facias HF160X	Facia for soffit fixed track
	HF200X Facia for face fixed track

Accessories


Handles Refer to your **Lockwood Catalogue** for a full range of handles

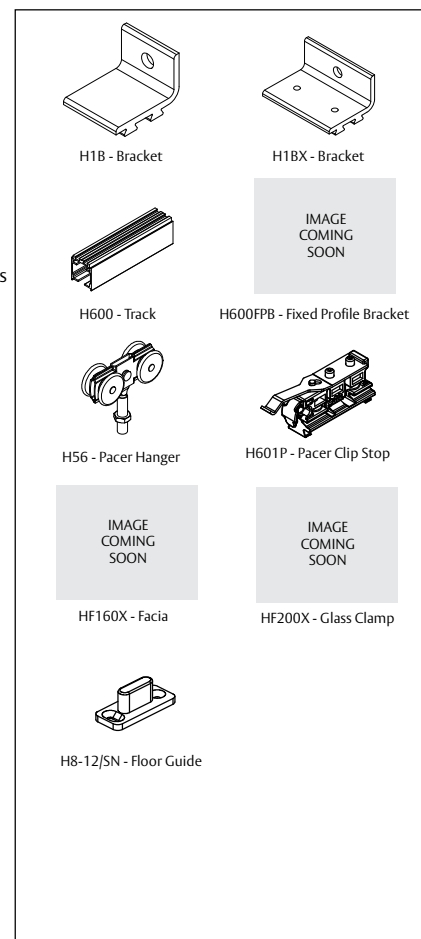




NOT TO SCALE


Pacer double fascia

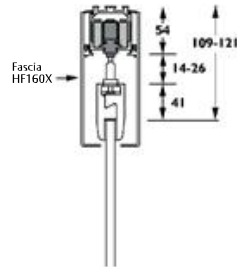

Pacer fixed panel

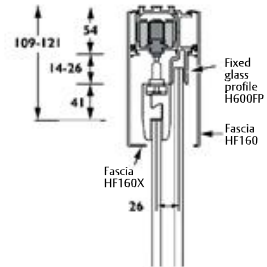

Pacer bracket

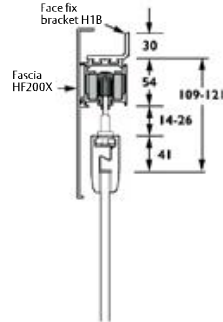

Pacer fixed panel fascia bracket

